



SHIP SEPARATE / LOOSE RISER ASSEMBLY FOR VERTICAL HI-RISE FAN COIL UNITS MODEL SERIES: 39VH AND 39L

MODELS: 39VHR2P AND 39LR2P (2-PIPE) 39VHR4P AND 39LR4P (4-PIPE)

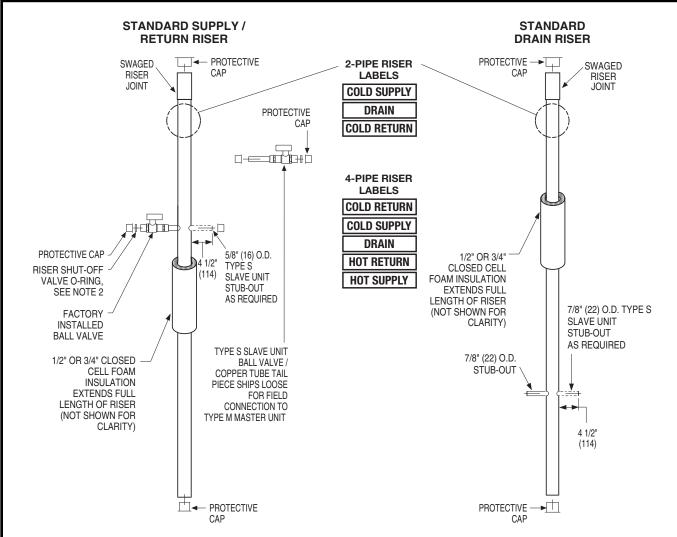

TAG INFORMATION LABEL EXAMPLE:



NOTES:

- All risers and ball valves are shipped with protective caps. These caps should remain in place until installation of the unit.
- 2. Each ball valve is supplied with an O-ring that is bagged and shipped loose for field installation by others.
- All risers are factory tested and guaranteed to be leak free at time of shipment.
- 4. Riser information shown shall reflect matching unit identification labels
- Refer to fan coil unit riser submittal for riser installation sequence order. Type S Slave units will have mirror image orientation and will be labeled in units.
- 6. Condensate P-trap and hose clamp ships installed in unit for field connection to drain riser.
- Each set of "Ship loose" risers are packed and shipped in their own carton.
- Riser length = Floor to Floor height + 2" (51). Extensions ship loose.
 39VH maximum riser length is 120" (3048)
 39L maximum riser length is .

SCHEDULE TYPE:	Dimensions are in inches (mm).			
PROJECT:				
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	11 - 20 - 08	39	2 - 28 - 08	39VH/L-2