

Model 1604AD adjustable, drainable blade type louver combines superior weather protection and architecturally pleasing aesthetics with airflow control including tight shut-off. Suitable for use in exhaust and low to medium velocity intake applications, the design features a drainable blade with rain gutters that divert collected water down concealed side downspouts and out the sill. The blades can be operated manually or with an actuator to provide tight shut-off when desired. Blades are reinforced with full length integral bosses for superior strength and the design exhibits low pressure drop characteristics throughout the airflow range. Model 1604AD provides adjustable flexibility as well as maximum protection against the elements.

STANDARD CONSTRUCTION:

- FRAME:** 4" (102) deep, Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness. Integral downspouts and caulking slot provided.
- BLADES:** Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness, with reinforcing bosses.
- BLADE SPACING:** Approx. 3 1/4" (83) on centers, at 41° angle (fully open).
- JAMB SEALS:** Compression type cambered metal.
- AXLES:** 1/2" (13) dia. plated steel.
- BEARINGS:** 1/2" (13) dia. Celcon[®].
- LINKAGE:** Plated steel. Concealed in frame.
- SCREEN:** 3/4" x .051 (19 x 1.3) expanded, flattened aluminum bird screen in removable frame, inside (rear) mount (adds approximately 3/8" [10] to louver depth).
- ACTUATOR:** Hand locking louver quadrant.
- FINISH:** Mill.
- MIN. SIZE:** 12" W x 12" H (305 x 305).
- MAX. SINGLE SECTION SIZE:** 48" W x 96" H (1219 x 2438) (With Blade and/or Jamb Seals).
 60" W x 120" H (1524 x 3048) (Without Seals). Larger sizes will be manufactured in sections with visible mullion side frame (downspouts are concealed) for field assembly.

OPTIONS:

- | | |
|---|--|
| ☐ FL15 Flanged Frame, 1 1/2" (38). | ☐ ESI Extended Sill. |
| ☐ FL20 Flanged Frame, 2" (51). | ☐ PASI Sill Pan. |
| ☐ BPV PVC Blade Seals. | ☐ FR1 1" (25) Filter Rack. |
| ☐ JSN No Jamb Seals. | ☐ FR2 2" (51) Filter Rack. |
| ☐ BSSS Type 304 S.S. Bird Screen. | ☐ PACA Perimeter Anchor Clips. |
| ☐ BSN No Bird Screen. | ☐ ACT Electric Actuator. |
| ☐ ISA Aluminum Insect Screen. | Specify: _____. |
| ☐ ISSS Type 304 S.S. Insect Screen. | ☐ Other: _____. |
| ☐ WE Welded Construction. | |

OPTIONAL FINISHES:



- | |
|---|
| ☐ PC3 Powder Coat AAMA 2603. Color: _____. |
| ☐ PC4 High Performance Powder Coat AAMA 2604 (Equivalent to 50% Kynar [®]). Color: _____. |
| ☐ PC5 Fluoropolymer Powder Coat AAMA 2605 (Equivalent to 70% Kynar [®]). Color: _____. |
| ☐ PCC Prime Coat. |
| ☐ AN04 Clear Anodized 204-R1. |
| ☐ AN15 Clear Anodized 215-R1. |

Color Anodized:


- | | |
|--|---|
| ☐ ANLB Light Bronze. | ☐ ANMB Medium Bronze. |
| ☐ ANDB Dark Bronze. | ☐ ANBK Black. |

OPTIONAL W x H SIZING (1/4" [6.5] Undersize standard):

- | | |
|--|---|
| ☐ U00 Exact Size. | ☐ U38 Undersize 3/8" (9.5). |
| ☐ U50 Undersize 1/2" (12.7). | |

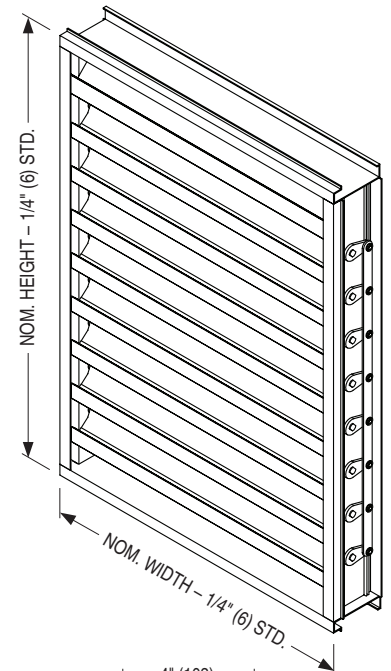

OPT. FLANGED FRAME (FL15 STD.)

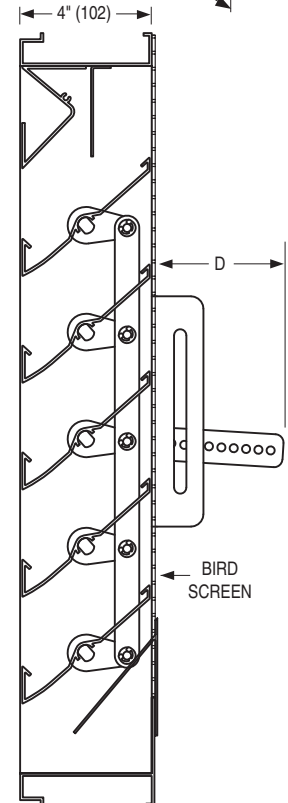

D = 6" (152) with Manual HLLQ
 D = 9" (229) with Actuator

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 1 of 3
 Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
6 - 10 - 25	1600	5 - 7 - 24	1604AD



EXTRUDED ALUMINUM ADJUSTABLE LOUVER
4" (102) DEEP • DRAINABLE BLADE
PERFORMANCE DATA
MODEL: 1604AD

FREE AREA in Square Feet and Square Meters

		Width in Inches and Meters								
		12 0.30	18 0.46	24 0.61	30 0.76	36 0.91	42 1.07	48 1.22	54 1.37	60 1.52
Height in Inches and Meters	12 0.3	0.22 0.02	0.36 0.03	0.49 0.05	0.62 0.06	0.76 0.07	0.89 0.08	1.03 0.10	1.16 0.11	1.30 0.12
	18 0.46	0.55 0.05	0.89 0.08	1.23 0.11	1.57 0.15	1.90 0.18	2.24 0.21	2.58 0.24	2.92 0.27	3.25 0.30
	24 0.61	0.81 0.08	1.30 0.12	1.80 0.17	2.29 0.21	2.78 0.26	3.28 0.30	3.77 0.35	4.26 0.40	4.76 0.44
	30 0.76	1.06 0.10	1.71 0.16	2.36 0.22	3.01 0.28	3.66 0.34	4.31 0.40	4.96 0.46	5.61 0.52	6.26 0.58
	36 0.36	1.32 0.12	2.13 0.20	2.93 0.27	3.74 0.35	4.54 0.42	5.35 0.50	6.15 0.57	6.96 0.65	7.76 0.72
	42 1.07	1.58 0.15	2.54 0.24	3.50 0.32	4.46 0.41	5.42 0.50	6.38 0.59	7.34 0.68	8.30 0.77	9.26 0.86
	48 1.22	1.91 0.18	3.08 0.29	4.25 0.39	5.41 0.50	6.58 0.61	7.75 0.72	8.47 0.79	10.08 0.94	11.25 1.04
	54 1.37	2.16 0.20	3.48 0.32	4.80 0.45	6.12 0.57	7.44 0.69	8.76 0.81	10.08 0.94	11.40 1.06	12.72 1.18
	60 1.52	2.42 0.22	3.89 0.36	5.37 0.50	6.85 0.64	8.32 0.77	9.80 0.91	11.27 1.05	12.75 1.18	14.22 1.32
	66 1.68	2.67 0.25	4.31 0.40	5.94 0.55	7.57 0.70	9.20 0.85	10.83 1.01	12.46 1.16	14.09 1.31	15.73 1.46
	72 1.83	2.93 0.27	4.72 0.44	6.50 0.60	8.29 0.77	10.08 0.94	11.87 1.10	13.65 1.27	15.44 1.43	17.23 1.60
	78 1.98	3.19 0.30	5.13 0.48	7.07 0.66	9.01 0.84	10.96 1.02	12.90 1.20	14.84 1.38	16.79 1.56	18.73 1.74
	84 2.13	3.44 0.32	5.54 0.51	7.64 0.71	9.74 0.90	11.84 1.10	13.94 1.29	16.03 1.49	18.13 1.68	20.23 1.88
	90 2.29	3.70 0.34	5.95 0.55	8.21 0.76	10.46 0.97	12.72 1.18	14.97 1.39	17.22 1.60	19.48 1.81	21.73 2.02
	96 2.44	4.03 0.37	6.49 0.60	8.94 0.83	11.40 1.06	13.86 1.29	16.32 1.52	18.78 1.74	21.23 1.97	23.69 2.20
	102 2.59	4.29 0.40	6.90 0.64	9.51 0.88	12.13 1.13	14.74 1.37	17.35 1.61	19.97 1.85	22.58 2.10	25.19 2.34
	108 2.74	4.51 0.42	7.25 0.67	10.00 0.93	12.75 1.18	15.50 1.44	18.25 1.70	21.00 1.95	23.75 2.21	26.49 2.46
	114 2.9	4.76 0.44	7.67 0.71	10.57 0.98	13.47 1.25	16.38 1.52	19.28 1.79	22.19 2.06	25.09 2.33	28.00 2.60
	120 3.05	5.06 0.47	8.15 0.76	11.24 1.04	14.33 1.33	17.42 1.62	20.50 1.90	23.59 2.19	26.68 2.48	29.77 2.77



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 3

Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

6 - 10 - 25


1600

5 - 7 - 24

1604AD

EXTRUDED ALUMINUM ADJUSTABLE LOUVER 4" (102) DEEP • DRAINABLE BLADE PERFORMANCE DATA MODEL: 1604AD

PRESSURE DROP

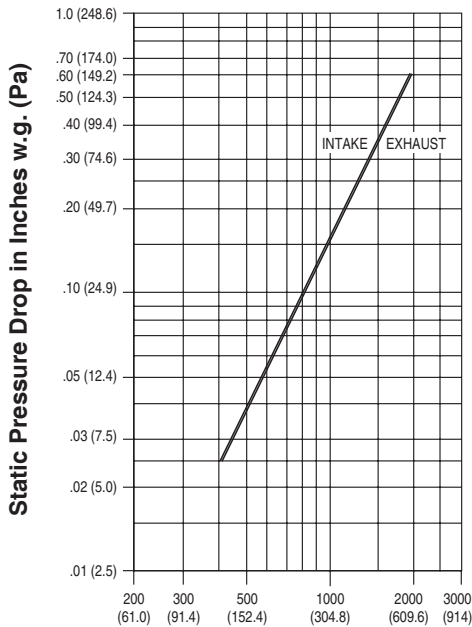


Air Velocity in Feet (Meters) Per Minute Through Free Area

Louver test size: 48" x 48" (1219 x 1219 mm).

Standard air density @ 0.075 lbs/ft³.

Tested to AMCA Fig. 5.5 - 6.5.

AIR LEAKAGE (Damper fully closed)

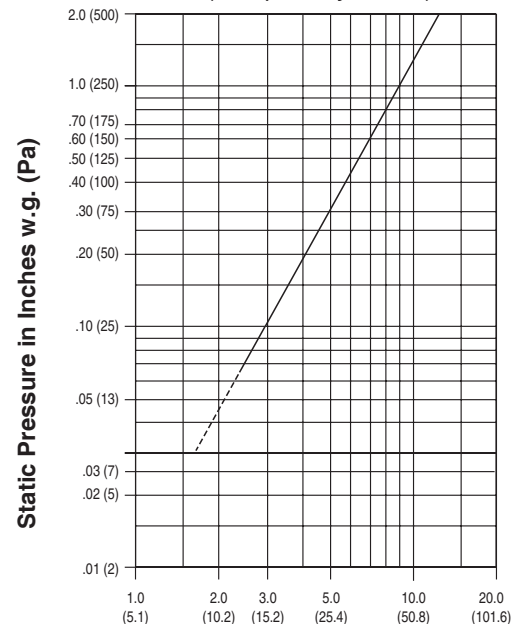

Louver test size: 48" x 48" (1219 x 1219 mm)
with blade and jamb seals.

AIRFLOW/WATER PENETRATION DATA for 48" x 48" (1219 x 1219) Louver Size

Free Area %	53%
Free Area sq. ft. (sq. m.)	8.47 (0.79)
Free Area Velocity at Point of Beginning Water Penetration at .01 oz./sq. ft. (3 ml/sq. m) (15 min. test duration)	1026 fpm (313 m/min.)
Air Volume at 1026 fpm	8690 cfm
Free Area Velocity	(4101 l/s)
Pressure Drop @ 1026 fpm	.17 in. w.g. (42 Pa)

NOTE: To minimize water penetration when sizing intake louvers, select a Free Area Velocity that is **below** the point of beginning water penetration.



Nailor Industries Inc. certifies that the Model 1604AD shown herein is licensed to bear the AMCA Certified Ratings Program seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Program seal applies to Water Penetration and Air Performance ratings.

Louvers were tested in accordance with AMCA Standard 500-L.



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 3 of 3
Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

6 - 10 - 25

1600

5 - 7 - 24

1604AD