



SINGLE DUCT TERMINAL UNIT

3000 SERIES


ACCESSORY • DISCHARGE SOUND ATTENUATOR

MODELS: AT303 AND AT305

Accessories:

Accessories ordered as separate standalone models.

AT Discharge Sound Attenuator (loose)

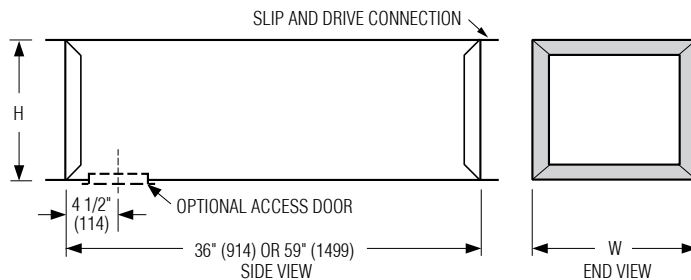

- 22 ga. (0.86) galvanized steel construction.
- Slip and drive connection.
- 3/4" (19) dual density fiberglass insulation, exposed edges coated to prevent erosion as standard.
- Field installed.

Dimensional Data

Unit Size	W	H
4, 5, 6	10 (254)	10 (254)
7, 8	12 (305)	12 1/2 (318)
9, 10	14 (356)	12 1/2 (318)
12	18 (457)	12 1/2 (318)
14	24 (610)	12 1/2 (318)
16	28 (711)	12 1/2 (318)
24 x 16	38 (965)	18 (457)

Options:

- ☐ **FG** 13/16" (21) Steri-Liner
- ☐ **FG1** 1" (25) Steri-Liner
- ☐ **FGJ** 13/16" (21) Steri-Liner and Perforated Metal Liner
- ☐ **FG2** 3/4" (19) Fiber Free Liner
- ☐ **FG3** 1" (25) Fiber Free Liner
- ☐ **FJ** 3/4" (19) Perforated Metal Liner with Fiberglass
- ☐ **FL** 3/4" (19) Solid Metal Liner with Fiberglass
- ☐ **FT1** 1" (25) Dual Density Fiberglass Liner
- ☐ **FT3** 2" (51) Dual Density Fiberglass Liner
- ☐ Access Door
 - Sizes 4 to 12 : 8" x 5" (203 x 127) Flat Oval;
 - Sizes 14 to 24 x 16: 12" x 6" (305 x 152) Flat Oval.
- ☐ Special Features: _____

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm)

DATE

B SERIES

SUPERSEDES

DRAWING NO.

7 - 11 - 25

3000

1 - 9 - 25

30AT