




**SINGLE DUCT TERMINAL UNIT
ACCESSORY • MULTI-OUTLET ATTENUATOR
MODELS: MOA303 AND MOA305**

Multi-Outlet Attenuator

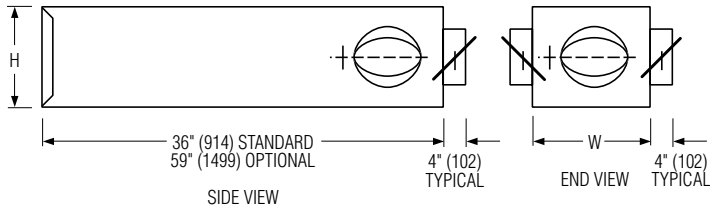


- MOA303** 3' (916) Long
- MOA305** 5' (1524) Long

Available Combinations

Unit Size	W	H	No. of Outlets	Outlet Size
4, 5, 6	10 (254)	10 (254)	1, 2, or 3	6 (152)
7, 8	12 (305)	12 1/2 (318)	2, 3, 4 or 5	6, 8 (152, 203)
9, 10	14 (356)	12 1/2 (318)	3, 4 or 5	8 (203)
	14 (356)	12 1/2 (318)	2, 3 or 4	10 (254)
12	18 (457)	12 1/2 (318)	4 or 5	8 (203)
	18 (457)	12 1/2 (318)	3, 4 or 5	10 (254)
14	28 (711)	12 1/2 (318)	4 or 5	10 (254)
16	28 (711)	12 1/2 (318)	4 or 5	10 (254)

Standard Outlet Arrangements

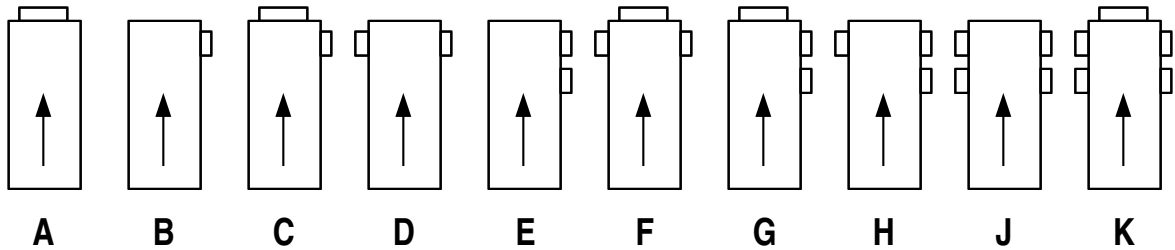

Features:

- 22 ga. (0.86) corrosion-resistant steel, mechanically sealed, low leakage construction.
- All are supplied with slip and drive cleat duct connection.
- Shipped loose for field attachment.
- 3/4" (19) dual density insulation standard. Exposed edges are coated to prevent erosion. Meets requirements of NFPA 90A and UL 181 Standards.
- Only one outlet size to be specified per M.O.A.. No mixing of outlet sizes on the same unit.
- Number and size of outlets on M.O.A. not to exceed the limits listed in table, both maximum quantity of outlets and maximum size of outlet.
- All round outlets c/w manual dampers with hand locking quadrant.
- Denotes inlet air flow direction. →
- For special outlet sizes and arrangements, consult your Nailor representative.

Options:

- Steri-liner.
- Fiber-free liner.
- 1" (25) liner.
- Special Features: _____

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm)

DATE

B SERIES

SUPERSEDES

DRAWING NO.

3 - 30 -17

3000

1 - 20 -14

30MOA