




ROUND RETROFIT TERMINAL UNIT
DIGITAL CONTROLS • PRESSURE INDEPENDENT
VARIABLE AIR VOLUME • EXTERNAL
TYPE 304 STAINLESS STEEL
MODEL: 36VRR-SS

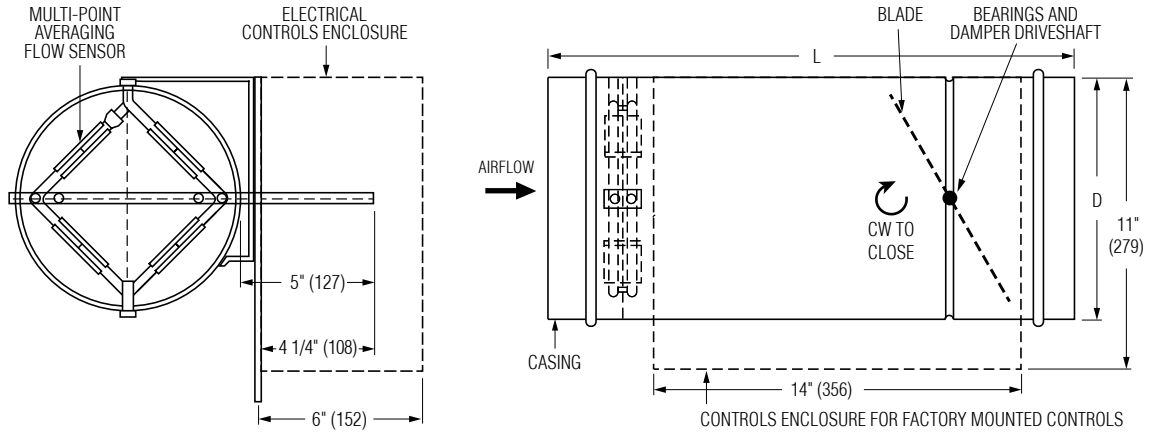

Dimensional Data

Unit Size	Airflow Range cfm (l/s)	D	L
4	0 – 225 (0 – 106)	3 7/8 (98)	18 (457)
5	0 – 400 (0 – 189)	4 7/8 (124)	18 (457)
6	0 – 550 (0 – 260)	5 7/8 (149)	18 (457)
7	0 – 800 (0 – 378)	6 7/8 (175)	18 (457)
8	0 – 1100 (0 – 579)	7 7/8 (200)	18 (457)
9	0 – 1400 (0 – 661)	8 7/8 (225)	20 (508)
10	0 – 1840 (0 – 868)	9 7/8 (251)	20 (508)
12	0 – 2500 (0 – 1081)	11 7/8 (302)	20 (508)
14	0 – 3370 (0 – 1590)	13 7/8 (352)	22 (559)
16	0 – 4525 (0 – 2135)	15 7/8 (403)	22 (559)

Standard Features:

- Casing: 22 ga. (0.86), type 304 stainless steel with stiffening beads.
- Blade: Two layers of 22 ga. (0.86), type 304 stainless steel laminated together (equivalent to 16 gauge) with a cross-linked polyethylene peripheral gasket for tight shut-off. 90° rotation, CW to close. Damper leakage is less than 2% of nominal CFM @ 6" w.g. as tested in accordance with ANSI/ASHRAE Standard 130.
- Bearings: Type 304 stainless steel.
- Drive Shaft/Axles: 1/2" (13) diameter type 304 stainless steel, double-bolted to blades. Indicator mark on the end of the shaft to show damper position.
- Controls enclosure: A 20 ga. (1.00) corrosion-resistant steel enclosure to enclose all controls is available and is supplied as standard when controls are factory mounted. Exact size and location may vary dependent upon controls.
- Multi-point averaging Diamond Flow sensor: Type 304 stainless steel. Gauge taps are provided for field balancing when controls are factory mounted.

- Right-hand control location is standard (as shown). Left hand is optional.

OPTIONS:

Digital Controls:

- Factory mounted (supplied by others).
 - Field mounted (supplied by others).
- See separate submittal.

Other:

- Cross flow sensor.
- Removable insert type Flow sensor (see submittal 36FMI-1).
- 24 VAC Control transformer.
- Toggle disconnect switch.
- Controls enclosure for field mounted controls.
- Dust tight enclosure seal.
- Hanger brackets.
- Special features _____.

SCHEDULE TYPE:	Dimensions are in inches (mm)			
PROJECT:				
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	2 - 6 - 23	3600	3 - 30 - 17	36VRR-2