



**LOW PROFILE FAN POWERED TERMINAL UNIT WITH
EPIC ECM MOTOR • STEALTH • SERIES FLOW
CONSTANT OR VARIABLE VOLUME
MODELS: 37SST, 37SEST AND 37SWST • UNIT SIZE 4**

DESCRIPTION:

- Only 11" (279) high.
- 20 ga. (1.0) galvanized steel construction.
- 16 ga. (1.6) galvanized steel inclined blade damper. 45° rotation. CW to close.
- 'Stealth™' tuned inlet attenuators (2). Shipped loose for field mounting.
- Ultra-high efficiency ECM fan motor. EPIC fan volume controller.
- Multi-point averaging Diamond Flow sensor. Aluminum construction. Supplied with balancing tees.
- Access panels top and bottom.
- 1/2" (13) dual density insulation, exposed edges coated to prevent air erosion. Meets requirements of NFPA 90A and UL 181.
- Single point electrical and/or pneumatic main air connection.
- Discharge opening for flanged duct connection.
- Full primary air valve low voltage NEMA 1 type enclosure for factory mounted DDC and analog electronic controls.
- Controls mounted as standard on RH side as shown. Terminals ordered with LH controls (optional) are inverted.

OPTIONS:

Digital Controls:

- Factory mounted (supplied by others)
- Field mounted (supplied by others)
- Nailor EZvav. See separate submittal.


Liner:

- Steri-liner
- Steri-liner + Perforated metal
- Fiber-free
- Perforated metal
- Solid metal
- Low temperature construction

Other:

- 1" (25) Throwaway filter.
- 2" Filter Rack only
- Left-hand controls location
- Toggle disconnect switch
- Fan unit fusing
- 24/24V Isolation transformer

Model 37SST and Basic Unit

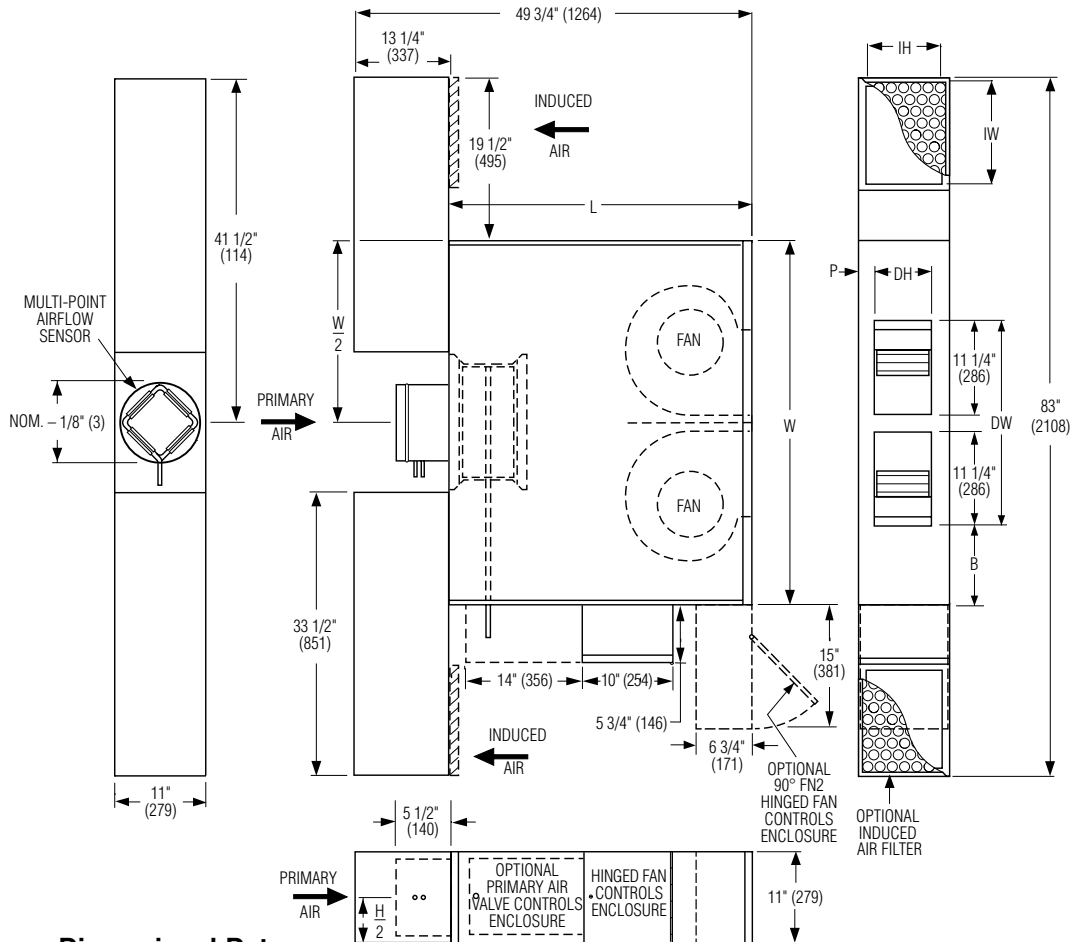

Dimensional Data

Unit Size	Inlet Size	W	L	B	P	Induced Air Inlet IW x IH	Outlet Discharge DW x DH	Filter Size
4	10 (254) Round 14 x 10 (356 x 254) Rect.	44 (1118)	36 1/2 (927)	9 3/4 (248)	2 1/16 (52)	12 x 9 (305 x 229) Qty. of 2	24 1/2 x 6 7/8 (622 x 175)	14 x 10 (356 x 254) Qty. of 2

- Hanger brackets.
- 1/4-turn fasteners (access panel)
- FN2 90° Line Voltage Enclosure
- FN3 Remote Line Voltage Controls Enclosure (See submittal FN3)
- Dust tight enclosure seal
- Remote user disconnect

Seismic Certification:

- Seismic Source International (Standard)
- HCAI (formerly OSHPD, California)
- Special Features: _____

Electrical Data

Unit Size	EPIC ECM Motor FLA				
	Motor HP	120V	208V	240V	277V
4	*	8.0	5.4	5.2	4.9

* The EPIC ECM is a variable horsepower motor. Refer to Selectworks schedule for actual power consumption. FLA = Full load amperage. All motors are single phase/60 Hz.



For heat options; see page 2 and 3.
Dimensions are in inches (mm).

SCHEDULE TYPE:				
PROJECT:				
ENGINEER:		DATE	B SERIES	SUPERSEDES
CONTRACTOR:		2 - 7 - 24	3700	8 - 31 - 22
				DRAWING NO.
				37SST-2



**LOW PROFILE FAN POWERED TERMINAL UNIT WITH
EPIC ECM MOTOR • HEAT ACCESSORIES
STEALTH • SERIES FLOW
CONSTANT OR VARIABLE VOLUME
MODELS: 37SWST AND 37SEST • UNIT SIZE 4**

Hot Water Coil Section Model 37SWST

Standard Features:

- Coil section installed on unit discharge.
- Coil (and header on multi-circuit units) is installed in insulated casing for increased thermal efficiency.
- 1/2" (13) copper tubes.
- Aluminum ripple fins.
- Sweat connections: One row 1/2" (13) O.D. male solder. Two and three row 7/8" (22) O.D. male solder.
- Top and bottom access panels for inspection and coil cleaning.
- Flanged outlet duct connection.


Coil Rows:

- 1-Row 2-Row 3-Row

Coil Hand Connections:

(Looking in direction of airflow).

- Right hand (illustrated). Standard.
 Left hand. Optional.

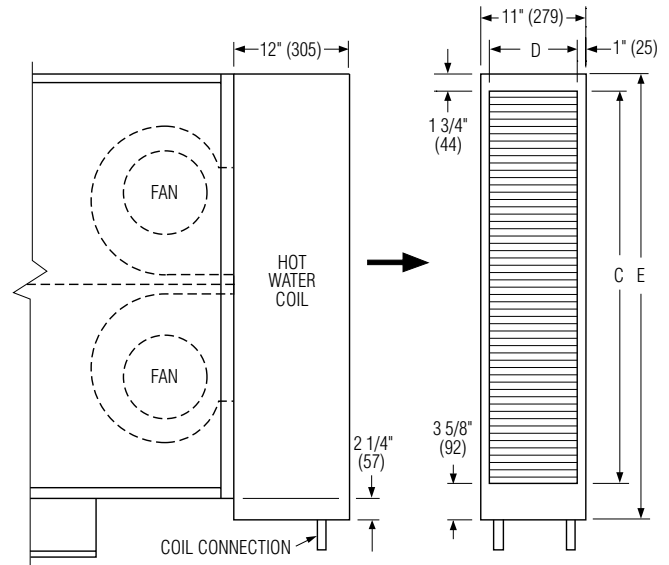

Unit Size	Outlet Duct Size C x D	E
4	41 x 9 (1041 x 229)	46 3/8 (1178)

**Hot Water Coil Section Model 37SWST
With FN2 Option**

Standard Features:

- Coil section installed on unit discharge.
- Coil and header are installed in insulated casing for increased thermal efficiency.
- 1/2" (13) copper tubes.
- Aluminum ripple fins.
- Sweat connections: One row 1/2" (13) O.D. male solder. Two and three row 7/8" (22) O.D. male solder.
- Top and bottom access panels for inspection and coil cleaning.
- Flanged outlet duct connection.

Coil Rows:


- 1-Row 2-Row 3-Row

Coil Hand Connection:

(Looking in direction of airflow).

- Left hand (illustrated). Standard.
 Right hand (terminals are inverted). Optional.

Connections must be selected opposite hand to FN2 controls enclosure location.

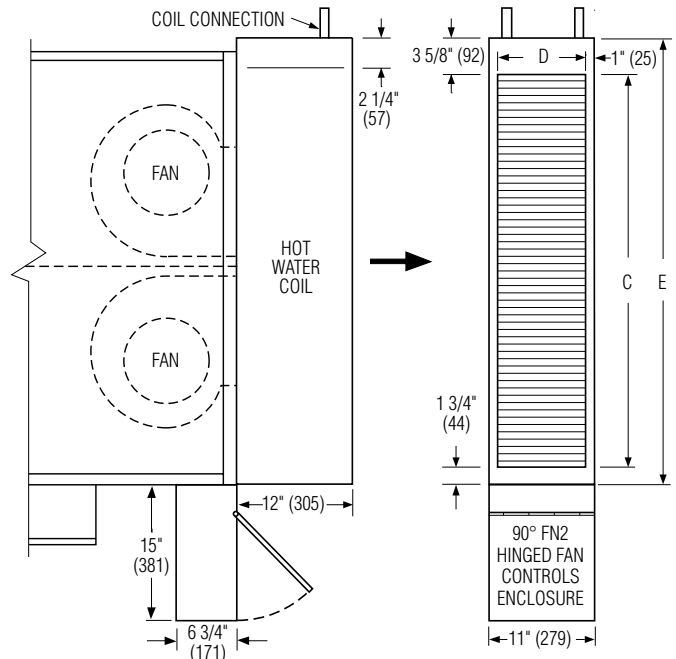

Unit Size	Outlet Duct Size C x D	E
4	41 x 9 (1041 x 229)	46 3/8 (1178)

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 3.
Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 7 - 24	3700	8 - 31 - 22	37SST-2



**LOW PROFILE FAN POWERED TERMINAL UNIT WITH
EPIC ECM MOTOR • HEAT ACCESSORIES
STEALTH • SERIES FLOW
CONSTANT OR VARIABLE VOLUME
MODELS: 37SWST AND 37SEST • UNIT SIZE 4**

Electric Coil Section Model 37SEST

Standard Features:

- Controls enclosure incorporates a hinged access door opening upstream that helps ensure NEC clearance requirements and reduces footprint. (FN2 90° design is standard).
- Unique hinged heater design permits easy access, removal and replacement of heater element without disturbing ductwork.
- Class A 80/20 Ni/Cr wire.
- Coil installed on unit discharge.
- Insulated coil element wrapper.
- Automatic reset high limit cut-outs (one per element).
- Single point electrical connection (except 600V).
- Fan interlock relay or positive pressure airflow switch.
- Flanged outlet duct connection.
- Terminal unit with coil is ETL Listed as an assembly.
- Controls mounted as standard on RH side as shown. Terminals ordered with LH controls (optional) are inverted.

Voltage:

Single phase, 60 Hz.

- 120V 208V 240V 277V


Three phase, 60 Hz.

- 208V 480V (4 wire wye).

- 600V (dual point connection). _____ .

Options:

- Toggle disconnect switch (includes fan).
- SCR control.
- Door interlock disconnect switch.
- Mercury contactors.
- Power circuit fusing.
- Dust tight construction.
- Manual reset secondary thermal cut out.

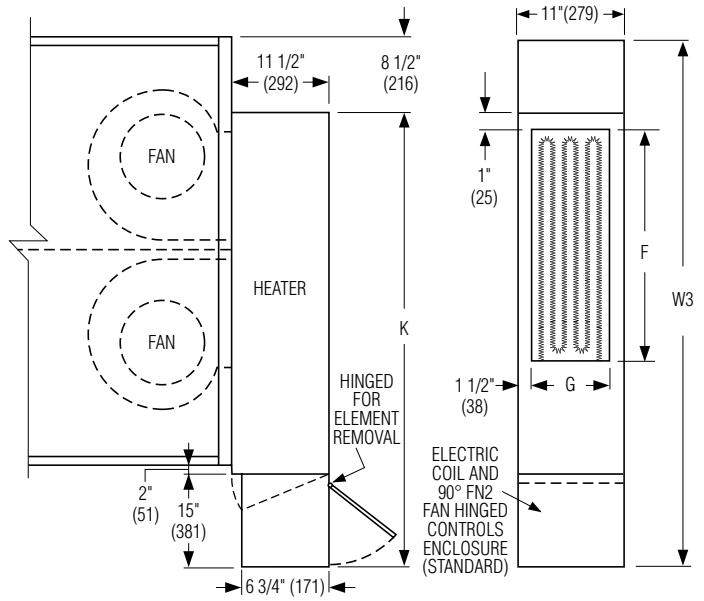

Unit Size	Outlet Duct Size F x G	W3	K
4	25 x 8 (635 x 203)	60 7/8 (1546)	52 3/8 (1330)

SCHEDULE TYPE:				
PROJECT:				
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	2 - 7 - 24	3700	8 - 31 - 22	37SST-2