
Engineered Comfort

LOW PROFILE HORIZONTAL FAN COIL UNITS
FREE RETURN • 2 OR 4 PIPE COOLING/HEATING
PROPORTIONAL ECM OR 3-SPEED ECM MOTOR
MODEL: 40HF TYPES Z AND ZW

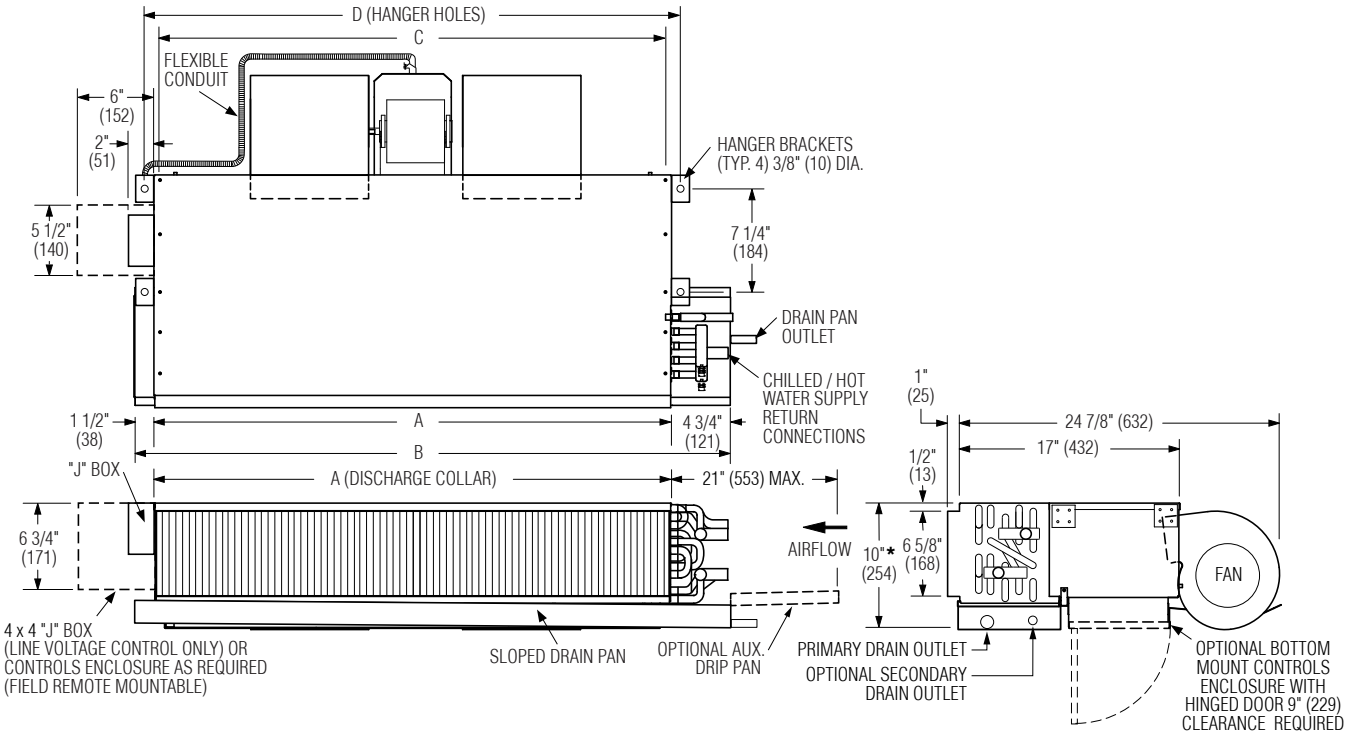

Dimensional Data

Unit Size	Nominal CFM (l/s)	A	B	C	D
3	300 (142)	20 (508)	26 1/2 (673)	20 3/8 (518)	22 5/8 (575)
4	400 (189)	25 (636)	31 1/2 (800)	25 3/8 (645)	27 5/8 (702)
6	600 (283)	30 (762)	36 1/2 (927)	30 3/8 (772)	32 5/8 (829)
8	800 (378)	40 (1016)	46 1/2 (1181)	40 3/8 (1026)	42 5/8 (1083)
12	1200 (566)	50 (1270)	56 1/2 (1435)	50 3/8 (1286)	52 5/8 (1337)
15	1500 (708)	60 (1524)	66 1/2 (1689)	60 3/8 (1534)	62 5/8 (1591)

***** 11 1/2" (292) with bottom mount controls enclosure and optional disconnect switch.

Electrical Data

Unit Size	Fan Qty.	Proportional ECM Motor FLA					3-Speed ECM Motor FLA				
		Motor HP	120V	208V	240V	277V	Motor HP	120V	208V	240V	277V
3	1	1/4	1.8	0.8	0.7	0.7	1/8	1.8	0.8	0.7	0.7
4	1	1/4	2.3	1.4	1.4	1.2	1/8	2.3	1.4	1.4	1.2
6	2	1/4	2.1	1.5	1.3	1.2	1/8	2.1	1.5	1.3	1.2
8	2	1/4	2.8	1.9	1.8	1.6	1/4	2.8	1.9	1.8	1.6
12	3	2 @ 1/4	3.9	2.5	2.6	2.5	2 - 1/8, 1/4	3.9	2.5	2.6	2.5
15	4	2 @ 1/4	4.4	3.0	2.9	2.7	2 @ 1/4	4.4	3.0	2.9	2.7

FLA = Full load amperage (High Fan Speed). All motors are single phase/60 Hz.

SSI Listed

C ETL US LISTED Intertek

AHRI CERTIFIED™ www.ahridirectory.org
Room Fan-Coils
AHRI Standard 440

SCHEDULE TYPE:				
PROJECT:				
ENGINEER:	**DATE**	**B SERIES**	**SUPERSEDES**	**DRAWING NO.**
CONTRACTOR:	**11 - 2 - 26**	**40**	**4 - 3 - 23**	**40HF-1**

Dimensions are in inches (mm)

Engineered Comfort reserves the right to change any information concerning product or pricing without notice.

Engineered Comfort

LOW PROFILE HORIZONTAL FAN COIL UNITS
FREE RETURN • 2 OR 4 PIPE COOLING/HEATING
PROPORTIONAL ECM OR 3-SPEED ECM MOTOR
MODEL: 40HF TYPES Z AND ZW

TYPE:

❑ **Z** Chilled/Hot Water (2-pipe system)

Coil Options:
- ❑ 3 Row C/HW
- ❑ 4 Row C/HW

❑ **ZW** Chilled & Hot Water (4-pipe system)

Coil Options:
- ❑ 3/1 CW/HW Rows
- ❑ 4/1 CW/HW Rows
- ❑ 3/2 CW/HW Rows
- ❑ 4/2 CW/HW Rows

STANDARD FEATURES:

- Galvanized steel casing.
- 1/2" (13) dual density insulation, exposed edges coated to prevent air erosion. Meets the requirements of NFPA 90A and UL 181.
- Single point electrical connection.
- Discharge collar for duct connection.
- Standard controls enclosure is mounted on side opposite coil connections.

MOTOR OPTIONS:

❑ Ultra-energy efficient proportional ECM fan motor(s) with thermal overload protection.

❑ Energy efficient 3-Speed ECM fan motor(s) with thermal overload protection.

WATER COIL SECTION:

- 1/2" (12.7) copper tubes with aluminum ripple fins.
- Cooling coils include a foam insulated, galvanized steel sloped drain pan with 7/8" (22.2) O.D. primary drain connection. Field reversible.
- Left hand coil unit / connection as shown (looking in direction of airflow) is standard. Right hand is opposite.
- Manual air vents.
- Sweat Connections: All 5/8" (15.9) O.D. male solder except size 15 three and four row: 7/8" (22.2) O.D. male solder.

OPTIONS AND ACCESSORIES:

❑ Foil face fiberglass liner.

❑ Closed cell foam liner.

❑ Bottom mounted hinged door controls enclosure.

❑ Right hand unit/coil connection.

❑ Toggle disconnect switch.

❑ Drain pan float switch.

❑ Factory assembled valve piping package (ships loose).

❑ 5/8" (16) O.D. secondary drain connection.

❑ Stainless steel drain pan.

❑ Auxiliary drip pan (ship loose).

Seismic Certification:

❑ Seismic Source International (Standard)

❑ HCAI (formerly OSHPD, California)

❑ Special Features: _____ .

SCHEDULE TYPE:	Page 2 of 2. Dimensions are in inches (mm)			
PROJECT:				
ENGINEER:	**DATE**	**B SERIES**	**SUPERSEDES**	**DRAWING NO.**
CONTRACTOR:	**11 - 2 - 26**	**40**	**4 - 3 - 23**	**40HF-1**

Engineered Comfort reserves the right to change any information concerning product or pricing without notice.