



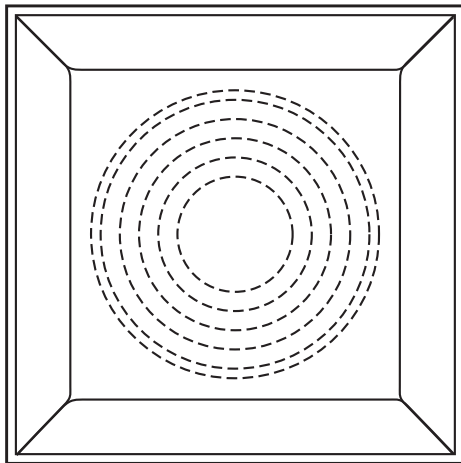


**PERFORATED CEILING DIFFUSERS**  
**FIBERGLASS PLENUM**  
**RETURN • 24" x 24" MODULE FOR T-BAR CEILINGS**  
**MODEL: 4350R**

**TYPE L Lay-in T-Bar**

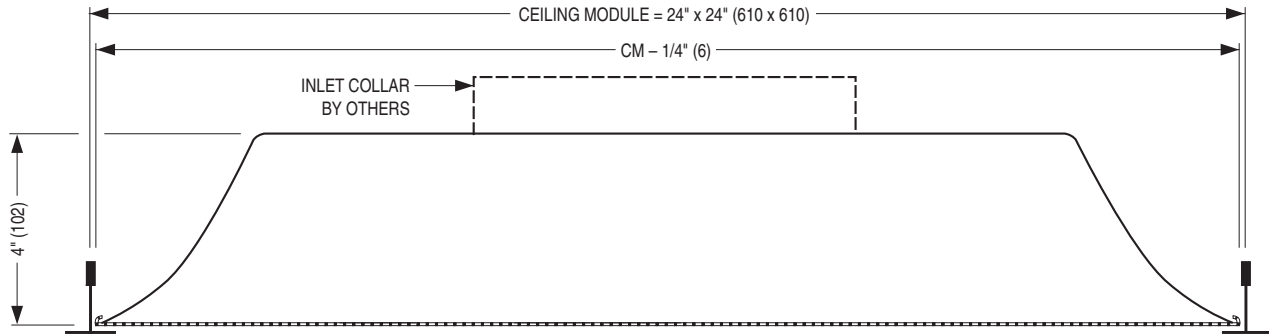

**TYPE S Surface Mount**

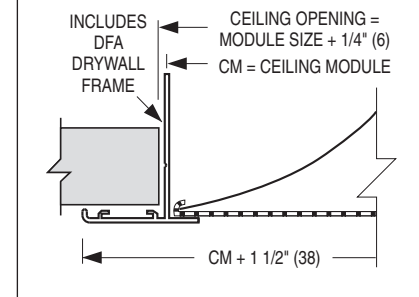

**DESCRIPTION:**

1. Corrosion-resistant steel diffuser face. One piece molded fiberglass backpan with foil back vapour barrier. 6.0 R-value.
2. Diffuser features a smoothly contoured back pan and wrap around fixed perforated face. Designed to match supply model 4350 in appearance, except pattern controllers are omitted.
3. Perforated face has 3/16" (5) diameter holes on 1/4" (6) staggered centers. 51% free area.
4. Pre-scored plenum for 6", 8", 10", 12", 14" or 15" (152, 203, 254, 305, 356 or 381) spin-in or tab-lock inlet collar (by others) for ducted return applications.
5. Standard finish is AW Appliance White face and black interior.

**OPTIONS:**

Finish:  
 SP Special \_\_\_\_\_

<b>SCHEDULE TYPE:</b>		Dimensions are in inches (mm).			
<b>PROJECT:</b>					
<b>ENGINEER:</b>	<b>DATE</b>	<b>B SERIES</b>	<b>SUPERSEDES</b>	<b>DRAWING NO.</b>	
<b>CONTRACTOR:</b>	2 - 6 - 17	4300	1 - 7 - 11	4350R	