




N SERIES PLENUM SLOT DIFFUSER

SUPPLY / RETURN • PREMIUM PERFORMANCE
HORIZONTAL / VERTICAL DISCHARGE
MODEL: 59NDR(I)-SPL

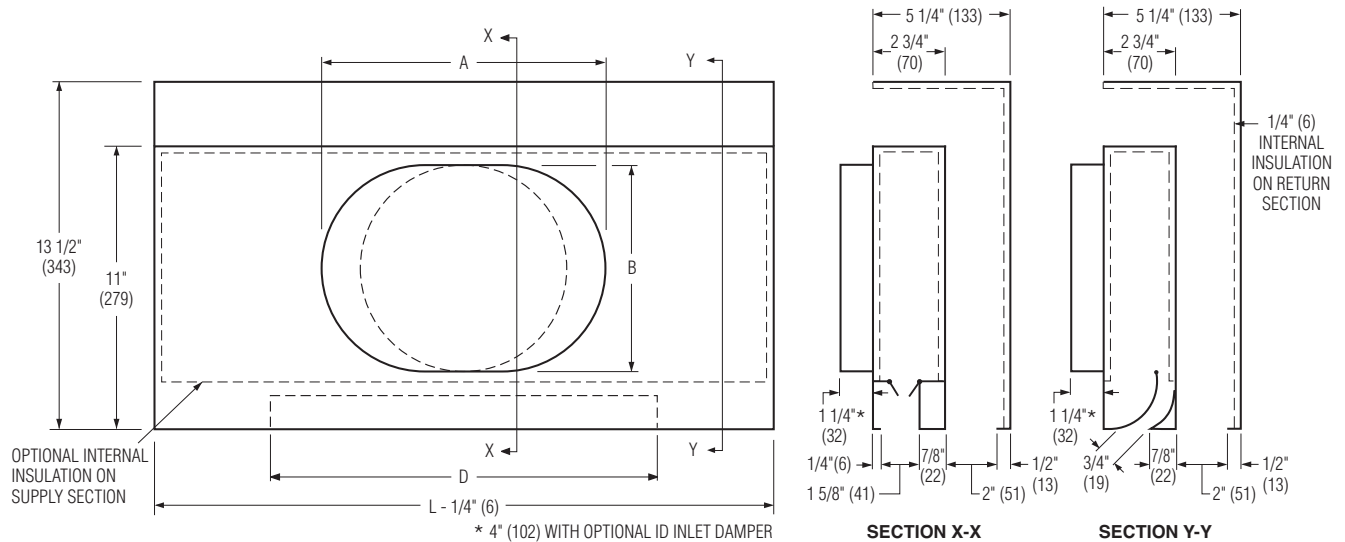

Nominal Length L		Available Down-Blow Slot Dim. D	Available Inlet Sizes
Imperial Modules	Metric Modules		
24 (610)	600	8, 12 (203, 305)	6, 8, 10 (152, 203, 254)
36 (914)	900	12, 15 (305, 381)	
48 (1219)	1200	12, 15, 18 (305, 381, 457)	
60 (1524)	1500	15, 18, 21 (381, 457, 533)	

Nominal Inlet Size	A	B
6 (152)	—	5 7/8 (149)
8 (203)	—	7 7/8 (200)
10 (254)	11 (279)	7 7/8 (200)

Inlets are round or oval as dimensioned.

DESCRIPTION:

- The 59NDR Supply/Return Plenum Slot Ceiling Diffusers have been designed for standard lay-in T-Bar application.
- The 59NDR design provides two air patterns and premium performance in perimeter curtain wall application. An aerodynamic extruded aluminum pattern controller provides a fixed horizontal discharge and produces a tight blanket of air into the room, maximizing coanda effect and induction of room air. A central down-blow section which incorporates two pattern controllers (shipped in wide open position), provides an adjustable vertical discharge along the wall or glass in perimeter applications.

An integral return air section returns room air into the ceiling plenum, with minimal short-circuiting of supply air. Wrap over design with internal insulation reduces cross-talk.

- The design is excellent for VAV, heating and cooling applications.
- Standard nominal lengths are 24", 36", 48" and 60" to suit imperial ceiling grids. Metric units are available.
- Plenum is corrosion resistant steel.
- Finish: BK Black pattern controllers and exposed edges.

OPTIONS (see submittal 59N_BS-ACC for details):

- ☐ EX External Foil Back Insulation
- ☐ Internal Insulation on supply section. Model 59NDR I
 - ☐ FGI 1/4" (6) Coated Fiberglass (default)
 - ☐ FFI 3/8" (10) Fiber-Free Foam

- ☐ ID Inlet Damper
- ☐ PF Plaster Frame
- Supplementary T-Bars
 - ☐ T1 One (inlet side)
 - ☐ T0 One (opposite inlet side)
 - ☐ T2 Two (Both sides)
- Mounting Clips
 - ☐ M1 One side (2 opposite inlet side)
 - ☐ M2 Both sides (4)
- Fineline/Bolt-Slot T-Bar Ceiling Construction (24" [610] and 48" [1219] nominal length only)
Cross notch not available
T-Bar Height
 - ☐ FNLA 1 3/4" (44)
 - ☐ FNLC 1 5/8" (41)
 - ☐ FNLD 1 25/32" (45)
- ☐ EQT Earthquake Tabs
- ☐ EC 3" (76) Extended inlet collar w/bead
- ☐ FS Diamond Flow Sensor w/extended collar bead. 6" (152) and 8" (203) round inlet sizes only. (Not available on models with internal insulation).
- ☐ SP Special features _____.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

7 - 27 - 17

5900

NEW

59NDR-SPL