


PATTERN CEILING DIFFUSERS

100% ALUMINUM • SQUARE NECK

SUITABLE FOR MRI

MODEL: 6200-MRI TYPE L

■ TYPE L LAY-IN T-BAR

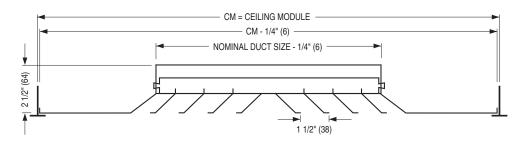

If the ceiling module is not 3" (76) or 6" (152) larger than the neck size of the diffuser in both dimensions, an aluminum module sized extended panel will be added.

Minimum duct size: 6 x 6 (152 x 152). Maximum duct size: see table. Available in 3" (76) increments only.

	IMPERIAL	METRIC MODULES				
Imperial Units (in.)		Metric Units (mm)		Metric Units (mm)		
СМ	Maximum	СМ	Maximum	СМ	Maximum	
CIVI	Duct Size	GIVI	Duct Size	CIVI	Duct Size	
12 x 12	9 x 9	305 x 305	229 x 229	300 x 300	152 x 152	
20 x 20	15 x 15	508 x 508	381 x 381	500 x 500	381 x 381	
24 x 12	21 x 9	610 x 305	533 x 229	600 x 300	457 x 152	
24 x 24	21 x 21	610 x 610	533 x 533	600 x 600	457 x 457	
48 x 24	45 x 21	1219 x 610	1143 x 533	1200 x 600	1067 x 457	

CORE STYLE SELECTION

SQUARE RECTANGULAR □ 1S □ 1A □ 1B 1-WAY 2-WAY □ 2G □ 2E □ 3A1 □ 3A2 (B is less than A but greater than A/2) (A is greater than B) □ 3B □ 3E (B is equal to A/2) (B is less than A/2) □ 4C

DESCRIPTION:

- Material: 100% Aluminum. Extended panel where required. Suitable for MRI.
- 2. Model 6200-MRI is a high capacity ceiling diffuser available in 1, 2, 3 or 4-way blow patterns to provide a tight horizontal airflow pattern from maximum to minimum airflow. Ideal for VAV applications.
- 3. Fixed core.
- 4. Standard finish is AW Appliance White.

OPTIONS:

EXTERNAL INSULATION

EX External Foil-Back Insulation, installed-R-4.2.

OPTIONAL FINISH:

☐ SP Special. Specify _____.

Patterns are shown in plan view (looking down into inlet).

SCHEDULE TYPE:	Dimensions are in inches (mm).			
PROJECT:	Differsions are in filtres (filtri).			
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	2 - 8 - 18	6200	5 - 11 - 15	6200-MRI