


### PATTERN CEILING DIFFUSERS

ALUMINUM • SQUARE, RECTANGULAR OR ROUND NECK

**MODELS: 6400 AND 6400-O TYPE F** 

## ☐ TYPE F FINELINE<sup>®</sup> T-BAR FOR FINELINE<sup>®</sup> TYPE CEILING SYSTEMS

DETAIL

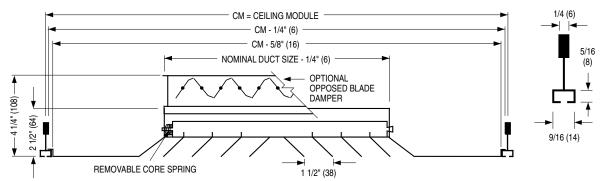

The diffuser is supplied in a steel module sized extended panel.

Minimum duct size: 6 x 6 (152 x 152). Maximum duct size: see table. Available in 3" (76) increments only.

IMPERIAL MODULES					METRIC MODULES		
Imperial Units (in.)			Metric Units (mm)		Metric Units (mm)		
C	M	Maximum Duct Size	СМ	Maximum Duct Size	СМ	Maximum Duct Size	
12)	(12	6 x 6	305 x 305	152 x 152	300 x 300	152 x 152	
24 >	(12	18 x 6	610 x 305	457 x 152	600 x 300	457 x 152	
24 >	(24	18 x 18	610 x 610	457 x 457	600 x 600	457 x 457	

### **CORE STYLE SELECTION**

# SQUARE RECTANGULAR □ 1S □ 1A □ 1B 1-WAY □ 2S □ 24 □ 2F 2-WAY □ 3A1 □ 3A2 (B is less than A (A is greater than B) but greater than A/2) □ 3B □ 3E □ 3H (B is equal to A/2) (B is less than A/2)

Patterns are shown in plan view (looking down into inlet).

#### **DESCRIPTION:**

- Material: Aluminum. Extended panel where required is corrosionresistant coated steel.
- 2. Model 6400 is an extra high capacity ceiling diffuser available in 1, 2, 3 or 4-way blow patterns. The diffusers are designed to create an induction effect which causes rapid mixing of room air and primary air and reduces discharge velocity. These diffusers rely upon the ceiling coanda effect in order to maintain the horizontal air pattern and catalogued throws. Suitable for normal ceiling heights of 9 10 feet.
- 3. Spring-loaded removable core.
- 4. Standard finish is AW Appliance White.

### **OPTIONS:**

☐ PLA Aluminum Extended Panel.

SQUARE AND RECTANGULAR NECK

- ☐ Steel opposed blade damper. Model 6400-O.
- Aluminum opposed blade damper. Model 6400-OA.

### **ROUND NECK**

- ☐ SR Square to round transition collar
- ☐ SR-O Square to round transition collar for use over O.B.D.
- 4275 Radial Opposed Blade Damper (round)
  - 4250 Radial Sliding Blade Damper (round)
- ☐ 4675 Butterfly Damper (round)

**EXTERNAL INSULATION** 

- ☐ EX External Foil-Back Insulation, installed-R-4.2.
- MIB Molded Insulation Blanket, -R-6.0. ('MIB' is available for Frame Types L, TL and F with a 24 x 24 CM only, 15 x 15

max. neck size and a 'SR' square-to-round transition collar).

OPTIONAL FINISH:

☐ SP Special. Specify \_\_\_\_\_\_.

Fineline® is a registered trademark of USG Corporation.

SCHEDULE TYPE:	Dimensions are in inches (mm).			
PROJECT:				
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	1 - 16 - 17	6400	8 - 17 - 16	6400-4