




PATTERN CEILING DIFFUSERS WITH IV INDUCTION VANES

STEEL • SQUARE, RECTANGULAR OR ROUND NECK
MODELS: 6500IV AND 6500IV-O TYPE F

OFFSET NECK OPTION



TYPE F • FINELINE® T-BAR



If the ceiling module is not 3" (76) larger than the neck size of the diffuser in both dimensions, a module sized extended panel will be added.

Minimum duct size: 6 x 6 (152 x 152)

Maximum duct size: see table.

Available in 3" (76) increments only.


FOR FINELINE® TYPE CEILING SYSTEMS

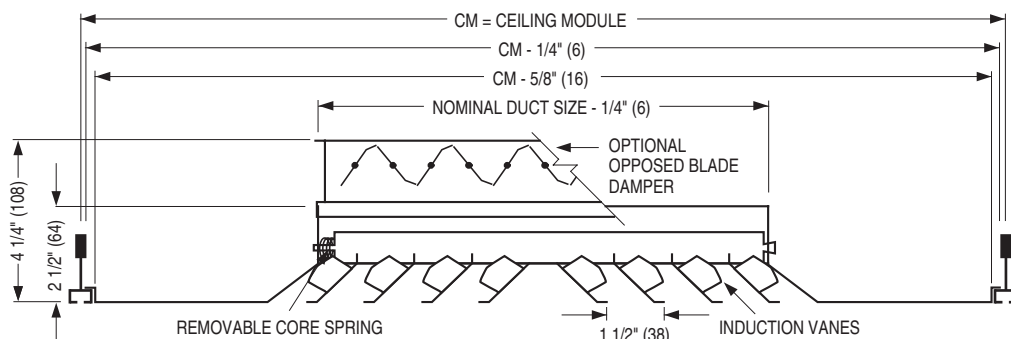

Imperial Modules				Metric Modules	
Imperial Units (in.)		Metric Units (mm)		Metric Units (mm)	
CM	Maximum Duct Size	CM	Maximum Duct Size	CM	Maximum Duct Size
12 x 12	6 x 6	305 x 305	152 x 152	300 x 300	152 x 152
24 x 12	18 x 6	610 x 305	457 x 152	600 x 300	457 x 152
24 x 24	18 x 18	610 x 610	457 x 457	600 x 600	457 x 457

Fineline® is a registered trademark of USG Interiors Inc..

CORE STYLE SELECTION

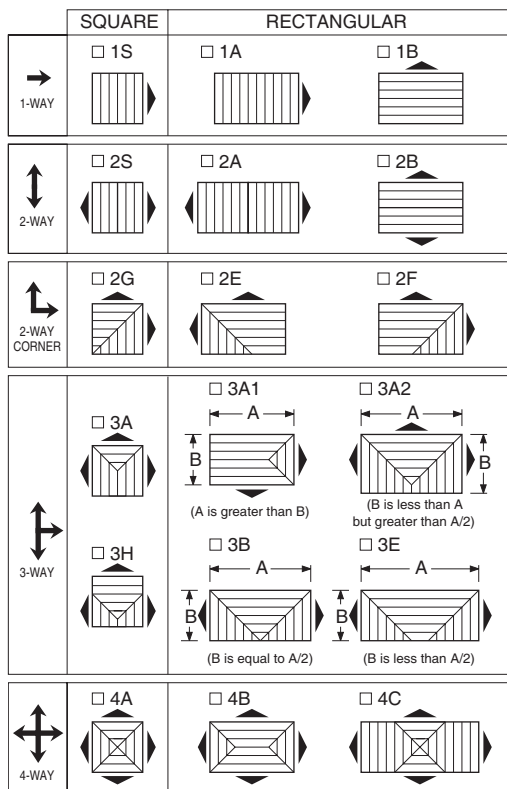

Patterns are shown in plan view (looking down into inlet).

DESCRIPTION:

1. Material: Corrosion-resistant steel.
2. Model 6500IV is a high capacity ceiling diffuser available in 1, 2, 3 or 4-way blow patterns to provide a tight horizontal airflow pattern from maximum to minimum airflow. The induction vanes consist of a set of 45° angled diffusion vanes spaced 1 1/2" (38) apart on the back of each diffuser louver. Vane sets on adjacent parallel louvers run in opposite directions and cause primary air to emerge from each louver at alternating angles. The resulting turbulent discharge air jets produce high induction rates and rapid temperature equalization, making the diffuser eminently suitable for VAV applications as the possibility of downdrafts (dumping) are eliminated.
3. Spring-loaded removable core.
4. Standard finish is AW Appliance White.

OPTIONS:

SQUARE AND RECTANGULAR NECK

- ☐ Steel opposed blade damper. Model 6500IV-O.
- ☐ ONA Offset neck adaptor. Fits outside duct (if a damper is required, order separately for remote mount. See Model OBDD).

ROUND NECK

- ☐ SR Square to round transition collar
- ☐ SR-O Square to round transition collar for use over O.B.D.
- ☐ 4275 Radial Opposed Blade Damper (round)
- ☐ 4250 Radial Sliding Blade Damper (round)
- ☐ 4675 Butterfly Damper (round)

EXTERNAL INSULATION

- ☐ EX External Foil-Back Insulation, installed
- ☐ MIB Molded Insulation Blanket, -R-6.0. ('MIB' is available for Frame Types L, TL and F with a 24 x 24 CM only, 15 x 15 max. neck size and a 'SR' Square-to-round transition collar).

OPTIONAL FINISH:

- ☐ SP Special. Specify _____.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

7 - 27 - 26

6500

2 - 8 - 18R

6500IV-5