




**SINGLE DUCT TERMINAL UNIT W/ HOT WATER REHEAT
OVERSIZED CASING (LARGER WATER COIL)
DIGITAL CONTROLS • PRESSURE INDEPENDENT
CONSTANT OR VARIABLE VOLUME
MODEL: D30RW**

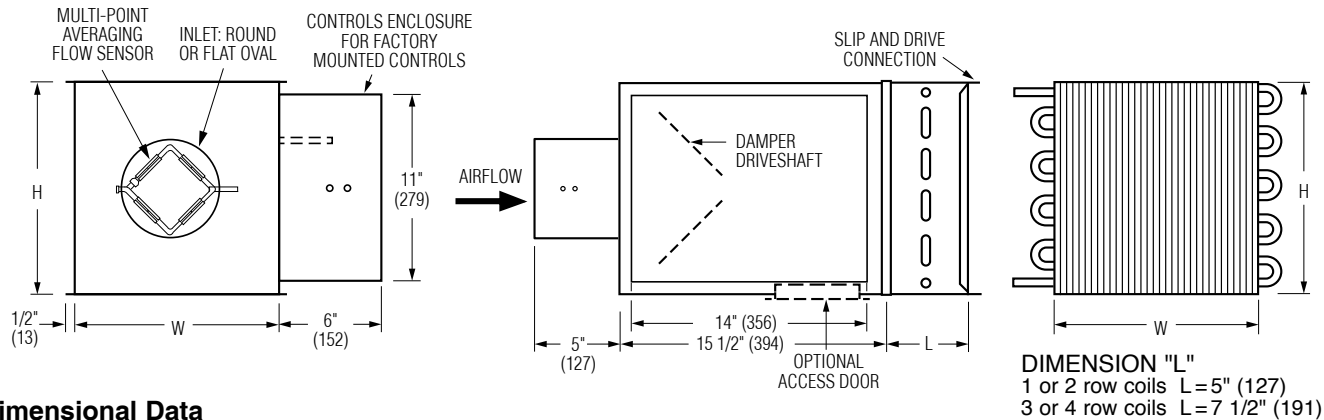

Dimensional Data

Unit Size	Inlet Size	Airflow Range* cfm (l/s)	W	H	Inlet Size (Nominal)	Coil Connections			
						1 Row	2 Row	3 Row	4 Row
8	4	0 – 225 (0 – 106)	12 (305)	12 1/2 (318)	3 7/8 (98) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
	5	0 – 400 (0 – 189)			4 7/8 (124) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
	6	0 – 550 (0 – 260)			5 7/8 (149) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
10	7	0 – 800 (0 – 378)	14 (356)	12 1/2 (318)	6 7/8 (175) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
	8	0 – 1100 (0 – 519)			7 7/8 (200) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
12	9	0 – 1400 (0 – 661)	18 (457)	12 1/2 (318)	8 7/8 (225) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
	10	0 – 1840 (0 – 868)			9 7/8 (251) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
14	12	0 – 2500 (0 – 1180)	24 (610)	12 1/2 (318)	12 15/16 x 9 13/16 (329 x 249) Oval	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
16	14	0 – 3125 (0 – 1475)	28 (711)	12 1/2 (318)	16 1/16 x 9 13/16 (408 x 249) Oval	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)
24	16	0 – 3725 (0 – 1758)	38 (965)	18 (457)	19 3/16 x 9 13/16 (487 x 249) Oval	7/8 (22)	7/8 (22)	1 3/8 (35)	1 3/8 (35)

* Maximum airflow limit is based upon 1.5" w.g. (373 Pa) max. differential pressure signal from Diamond Flow Sensor.

Standard Features:

- 22 ga. (0.86) zinc coated steel casing, mechanically sealed, low leakage construction.
- 16 ga. (1.61) corrosion-resistant steel inclined opposed blade damper with extruded PVC seals (single blade on size 4, 5, 6). 45° rotation, CW to close. Tight close-off. Damper leakage is less than 2% of the terminal rated airflow at 3" w.g. (750 Pa).
- 1/2" (13) dia. plated steel drive shaft. An indicator mark on the end of the shaft shows damper position.
- Multi-point averaging Flow Sensor. Aluminum construction. Supplied with balancing tees.
- Rectangular discharge with slip and drive cleat duct connection.
- Full NEMA 1 type controls enclosure for factory mounted controls.
- 3/4" (19), dual density insulation, exposed edges coated to prevent air erosion. Meets the requirements of NFPA 90A and UL 181.
- Right-hand controls location is standard

(shown) when looking in direction of airflow. Optional left hand controls mounting is available.

• Model D30RW can be installed horizontally, vertical or at any angle. Operation is not affected by position.

Hot Water Coil Section:

- 1/2" (13) Copper tubes and aluminum ripple fins, 10 per inch.
- 1, 2, 3 or 4 row.
- Left or right hand connection. Determined by looking in direction of airflow (RH illustrated).
- 1/2" (13), 7/8" (22) or 1 3/8" (35) O.D. male solder sweat connections.

Digital Controls:

- Factory mounte (supplied by others)
 - Field mounted (supplied by others)
 - Nailor EZvav
- See separate submittal.

Options and Accessories:

- Steri-liner.
 - Fiber-free liner.
 - Steri-liner + Perforated metal liner.
 - Perforated metal liner.
 - Solid metal liner.
 - 1" (25) liner.
 - FMI Removable insert type Flow Sensor.
 - 20 ga. (1.00) construction.
 - Bottom access door.
 - 24 VAC Control transformer.
 - Toggle disconnect switch.
 - Hanger brackets.
 - Controls enclosure for field mounted controls.
 - Dust tight enclosure seal.
 - Ultra low leakage casing.
- Seismic Certification:
- Seismic Source International (Standard)
 - HCAI (formerly OSHPD, California)
 - Special Features: _____




SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:


Page 1 of 2.			
Dimensions are in inches (mm).			
DATE	B SERIES	SUPERSEDES	DRAWING NO.
1 - 9 - 25	3000	2 - 27 - 24	D30RW-OC

AT3I 3' Integral Sound Attenuator plus Hot Water Coil

- Single continuous length terminal construction minimizes casing leakage.
- Continuous internal insulation reduces insulation seams and minimizes airflow disturbance.
- Supplied with same liner as basic unit.

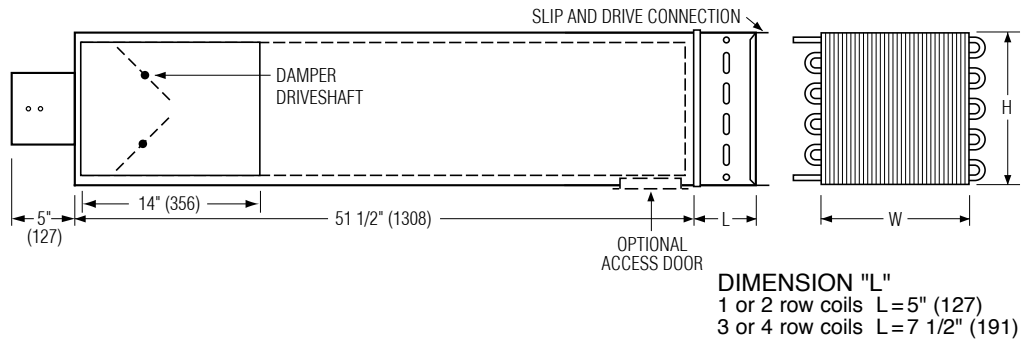


AT3S 3' Separate Discharge Sound Attenuator

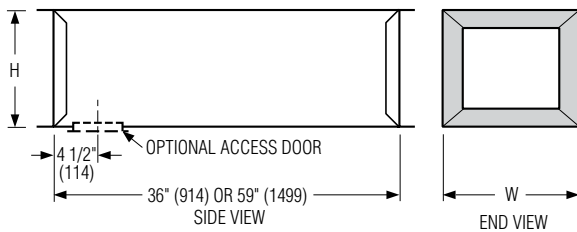


- 22 ga. (0.86) galvanized steel construction.
 - Slip and drive connection.
 - Supplied with same liner as basic unit.
- Standalone Models:**
- AT303 3'** (916) Long - Standard.
 - AT305 5'** (1524) Long - Optional.
 - Special Features:** _____

FF Round Discharge Collar

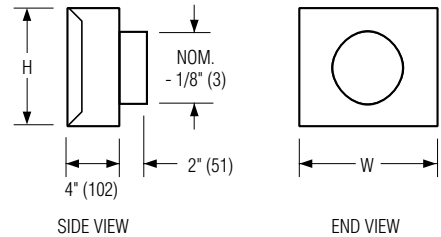

FTL Low Temperature Construction

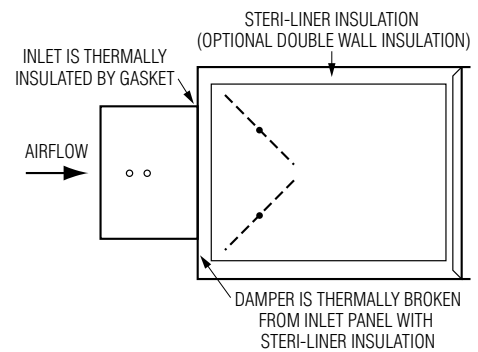

Dimensional Data

Unit Size	W	H	Access Door	FF Nominal Outlet Size
8	12 (305)	12 1/2 (318)	8 x 5	8 (203)
10	14 (356)	12 1/2 (318)	(203 x 127)	10 (254)
12	18 (457)	12 1/2 (318)	Flat Oval	12 (305)
14	24 (610)	12 1/2 (318)	12 x 6	14 (356)
16	28 (711)	12 1/2 (318)	(305 x 152)	16 (406)
24	38 (965)	18 (457)	Flat Oval	-

For Factory Mounted Valve/Piping Package Orientation, See drawing D30RWVP-1.

SCHEDULE TYPE:				
PROJECT:				
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	1 - 10 - 25	3000	2 - 27 - 24	D30RW-OC