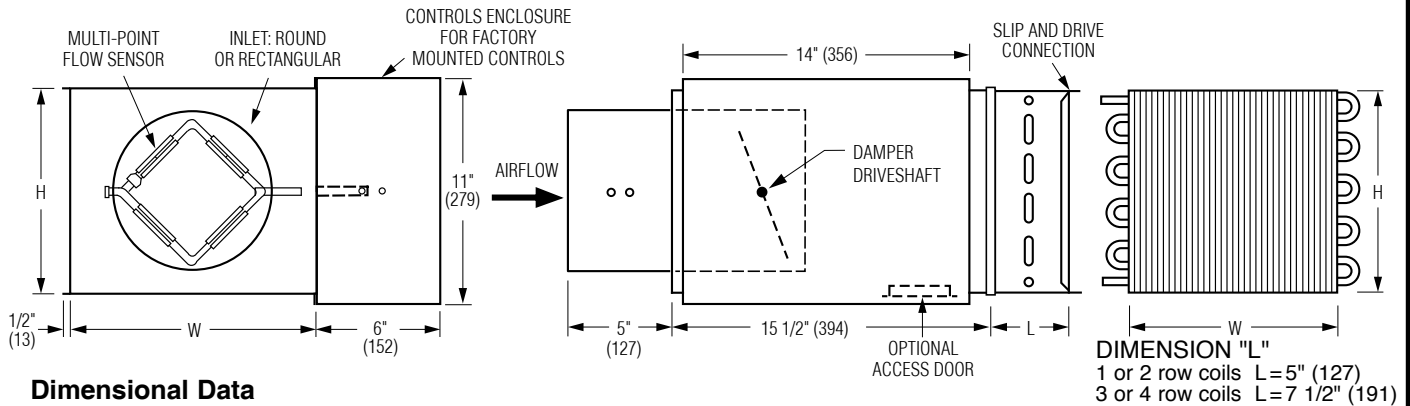




**SINGLE DUCT TERMINAL UNIT WITH
HOT WATER REHEAT
DIGITAL CONTROLS • PRESSURE INDEPENDENT
CONSTANT OR VARIABLE VOLUME
MODEL: D31RW**



Dimensional Data

Unit Size	Airflow Range* cfm (l/s)	W	H	Inlet Size	Coil Connections			
					1 Row	2 Row	3 Row	4 Row
4	0 - 225 (0 - 106)	12 (305)	8 (203)	3 7/8 (98) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
5	0 - 400 (0 - 189)	12 (305)	8 (203)	4 7/8 (124) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
6	0 - 550 (0 - 260)	12 (305)	8 (203)	5 7/8 (149) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
7	0 - 800 (0 - 378)	12 (305)	10 (254)	6 7/8 (175) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
8	0 - 1100 (0 - 519)	12 (305)	10 (254)	7 7/8 (200) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
9	0 - 1400 (0 - 661)	14 (356)	12 1/2 (318)	8 7/8 (225) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
10	0 - 1840 (0 - 868)	14 (356)	12 1/2 (318)	9 7/8 (251) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
12	0 - 2500 (0 - 1180)	16 (406)	15 (381)	11 7/8 (302) Round	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)
14	0 - 3370 (0 - 1590)	20 (508)	17 1/2 (508)	13 7/8 (352) Round	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)
16	0 - 4525 (0 - 2135)	24 (610)	18 (457)	15 7/8 (403) Round	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)
24 x 16	0 - 8330 (0 - 3931)	38 (965)	18 (457)	23 7/8 x 15 7/8 (606 x 403) Rect.	7/8 (22)	7/8 (22)	1 3/8 (35)	1 3/8 (35)

* Maximum airflow limit is based upon 1.5" w.g. (373 Pa) max. differential pressure signal from Flow Sensor.

Standard Features:

- 22 ga. (0.86) galvanized steel casing, mechanically sealed, low leakage construction. Leakage is less than 1% of the terminal rated airflow at 1" w.g. (250 Pa).
 - 2 x 20 ga. (0.86) round laminated butterfly damper with a polyurethane peripheral gasket. 90° rotation, CW to close. Tight shut-off. Damper leakage is less than 1% of the terminal rated airflow at 3" w.g. (750 pa.) and less than 2% at 6" w.g. (1500 pa.) as tested in accordance with ANSI / ASHRAE Standard 130.
 - 1/2" (13) dia. plated steel drive shaft. An indicator mark on the end of the shaft shows damper position.
 - Unit sizes 4-16 feature round inlet collars.
 - Multi-point averaging Diamond Flow Sensor. Supplied with balancing tees (4 and 5 are Annubar).
 - Rectangular discharge with slip and drive cleat duct connection.
 - Full NEMA 1 type controls enclosure for factory mounted controls.
 - 3/4" (19), dual density insulation, exposed edges coated to prevent air erosion. Meets the requirements of NFPA 90A and UL 181.
 - Right-hand controls location is standard (shown) when looking in direction of airflow. Optional left hand controls mounting is available.
 - Model D31RW can be installed horizontally, vertical or at any angle. Operation is not affected by position.
- Hot Water Coil Section:**
- 1/2" (13) Copper tubes and aluminum ripple fins, 10 per inch.
 - 1, 2, 3 or 4 row.

Options and Accessories:

- 20 ga. (1.00) construction
- 24 VAC control transformer
- Toggle disconnect switch
- Dust tight enclosure seal
- Liner:**
- Steri-liner
- Steri-liner + Perforated metal
- Fiber-free
- Perforated metal
- Solid metal
- 1" (25) fiberglass
- Flow Sensor:**
- Diamond Flow Sensor, removable
- Cross Flow Sensor
- Cross Flow Sensor, removable
- Other:**
- Bottom access door.
- Hanger brackets.
- Ultra low leakage casing.
- Controls enclosure for field mounted controls.
- Seismic Certification:**
- Seismic Source International (Standard)
- HCAI (formerly OSHPD, California)
- Special features: _____

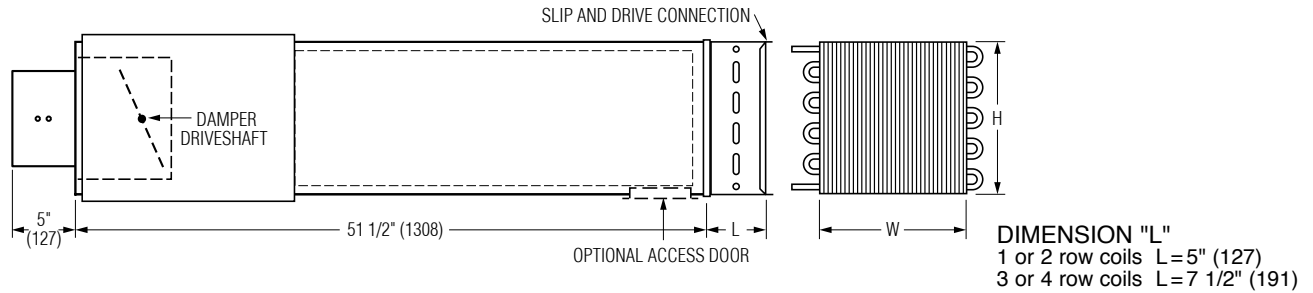
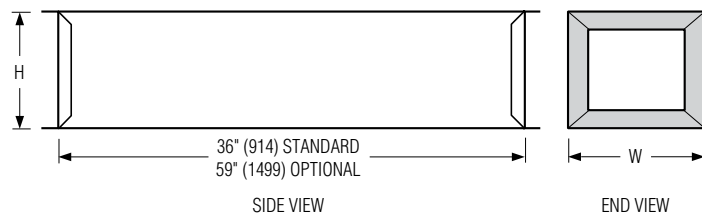


SCHEDULE TYPE:	
PROJECT:	
ENGINEER:	
CONTRACTOR:	

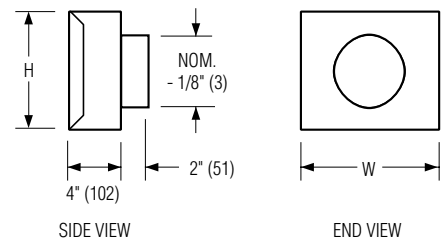
DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 6 - 23	3100	5 - 7 - 21	D31RW

Integral Sound Attenuator plus Hot Water Coil

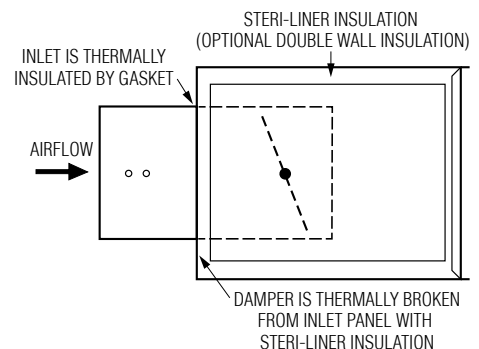
- Single continuous length terminal construction minimizes casing leakage.
- Continuous internal insulation reduces insulation seams and minimizes airflow disturbance.


 AT Discharge Sound Attenuator (loose)


- Shipped loose for field attachment.
 - Slip and drive connection.
 - Supplied as standard with same liner as basic unit.
- AT313** 3' (916) Long - Standard.
 - AT315** 5' (1524) Long - Optional.
 - Special Features: _____

 FF Round Discharge Collar

Dimensional Data

Unit Size	W	H	FF Nominal Outlet Size
4, 5, 6	12 (305)	8 (203)	4, 5, 6 (102, 127, 152)
7, 8	12 (305)	10 (254)	7, 8 (178, 203)
9, 10	14 (356)	12 1/2 (318)	9, 10 (229, 254)
12	16 (406)	15 (381)	12 (305)
14	20 (508)	17 1/2 (445)	14 (356)
16	24 (610)	18 (457)	16 (406)
24 x 16	38 (965)	18 (457)	-

 FTL Low Temperature Construction

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 2 of 2.

Dimensions are in inches (mm).

DATE
B SERIES
SUPERSEDES
DRAWING NO.

2 - 6 - 23

3100

5 - 7 - 21

D31RW