




FULL ROUND 360° DISPLACEMENT DIFFUSER
FLOOR STANDING • FREE STANDING
STEEL PERFORATED FACE
MODEL: DFR360

Model DFR360 • 360° Radial Discharge Air Pattern

Dimensional Data:

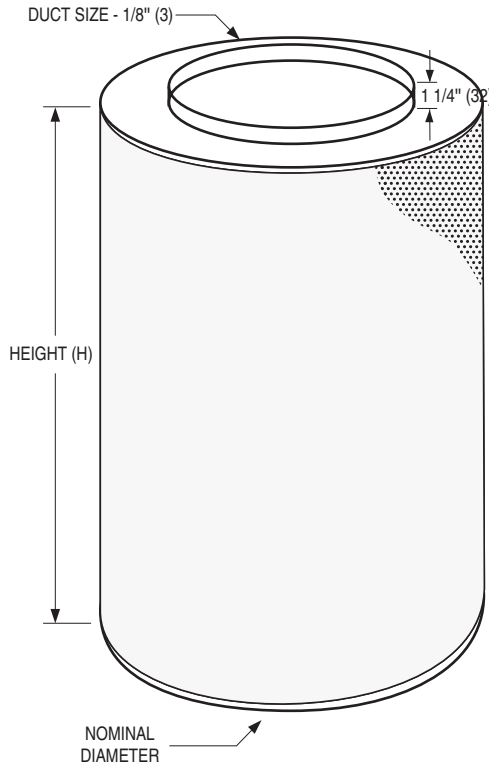

Unit Size (Dia. x H)	Duct Size
12 x 24 (305 x 610) 12 x 30 (305 x 762) 12 x 36 (305 x 914) 12 x 48 (305 x 1219)	8 (203)
18 x 24 (457 x 610) 18 x 30 (457 x 762) 18 x 36 (457 x 914) 18 x 48 (457 x 1219)	10 (254), 12 (305), 14(356)
24 x 24 (610 x 610) 24 x 30 (610 x 762) 24 x 36 (610 x 914) 24 x 48 (610 x 1219)	10 (254), 12 (305), 14(356), 16 (406), 18 (457)
24 x 60 (610 x 1524)	14(356), 16 (406), 18 (457), 20 (508)
30 x 24 (762 x 610) 30 x 30 (762 x 762) 30 x 36 (762 x 914) 30 x 48 (762 x 1219)	14(356), 16 (406), 18 (457), 20 (508)
30 x 60 (762 x 1524)	14(356), 16 (406), 18 (457), 20 (508), 22 (559)
36 x 24 (914 x 610) 36 x 30 (914 x 762) 36 x 36 (914 x 914) 36 x 48 (914 x 1219)	14(356), 16 (406), 18 (457), 20 (508), 22 (559)
42 x 24 (1067 x 610) 42 x 30 (1067 x 762) 42 x 36 (1067 x 914) 42 x 48 (1067 x 1219)	16 (406), 18 (457), 20 (508), 22 (559)
48 x 24 (1219 x 610) 48 x 30 (1219 x 762) 48 x 36 (1219 x 914) 48 x 48 (1219 x 1219)	16 (406), 18 (457), 20 (508), 22 (559)

DESCRIPTION:

1. Construction: Heavy gauge corrosion-resistant coated steel. Standard 18 ga. (1.3) perforated face has 3/32" (2) dia. holes on 3/16" (5) staggered centers, providing 23% free area.
2. An equalization baffle is provided behind the diffuser face to ensure an even distribution of low velocity supply air.
3. Floor mounted displacement diffusers are especially designed to supply air at a very low velocity to minimize the potential for drafts and enhance occupant comfort.
4. Standard finish is AW Appliance White.

OPTIONS:

1. Construction:
 - 16GP Heavy Duty 16 ga. (1.6) Perforated Face
2. Inlet Type:
 - RND Round
3. Inlet Location:
 - T Top
 - B Bottom

4. Finish:
 - AW Appliance White (default)
 - AL Aluminum
 - BK Black
 - BW British White
 - SP Special _____
5. Diffuser Base:
 - DB02 2" (51) High
 - DB03 3" (76) High
 - DB04 4" (102) High
 - DB05 5" (127) High
 - DB06 6" (152) High
6. Volume Control:
 - BD Balancing Damper
 - FMSSD Flow Measuring Station with balancing damper (Round inlet sizes only). See separate submittal.
7. Protective Film:
 - PFC Protective Film Cover on Face and Inlet

SCHEDULE TYPE:		Dimensions are in inches (mm).			
PROJECT:					
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.	
CONTRACTOR:	2 - 25 - 20	DFR	1 - 8 - 20	DFR360	