

FLOOR BOOT (FOR ROUND "SWIRL" DIFFUSERS)
UNDERFLOOR AIR DISTRIBUTION SYSTEMS
DUCTED CONNECTION
MODEL: NFB-D

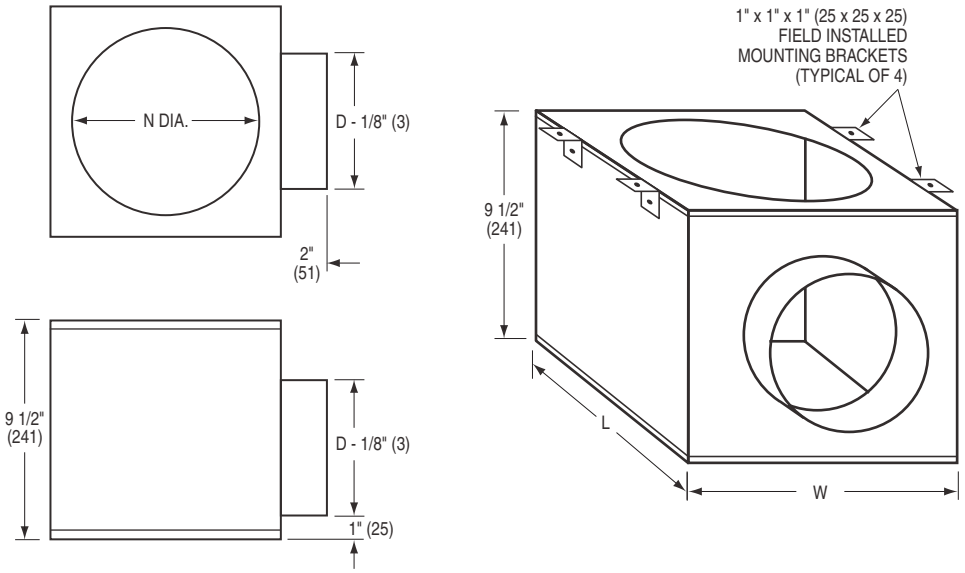

NFB-D WITH OPTIONAL ID INLET DAMPER

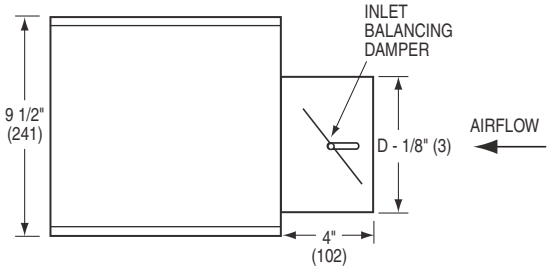

Dimensional Data

Unit/Diffuser Size	N (diameter)	W/L	D (diameter)
08	8 1/8 (205)	10 (254)	6" (152) or 8" (203)
10	10 5/16 (262)	12 (305)	

DESCRIPTION:

1. The Nailor Floor Boot is specifically designed for mounting on the underside of a floor tile under a Nailor (A)NFD Series Round Floor "Swirl" Diffuser. A top plate with a round discharge hole outlet helps ensure proper sealing to the diffuser even when structural depressions (waffle design) exist on the bottom surface of the floor tile.
2. The NFB-D has a round inlet collar that enables a flexible duct connection to a fan powered terminal unit in order to provide variable air volume or constant volume cooling and / or heating.
3. Material: 22 ga. (0.85) corrosion resistant steel. Mechanically sealed.
4. The NFB-D is supplied with four L-shaped mounting brackets, shipped loose for field attachment. This enables the NFB-D to be installed in any desired position and the brackets to be suitably positioned for attachment to the lower face areas of a "waffle type" floor tile.
5. Nailor (A)NFD Round "Swirl" Diffusers are available with a PFG Press Fit Gasket option which further assists air leakage control.

OPTIONS:

❑ CFF2 Acoustic Liner. 1/2" (13) Closed cell foam.

❑ ID Inlet balancing damper (Duro Dyne JDS snap-in type).

SCHEDULE TYPE	Dimensions are in inches (mm).			
PROJECT				
ENGINEER	**DATE**	**B SERIES**	**SUPERSEDES**	**DRAWING NO.**
CONTRACTOR	**10 - 13 - 14**	**NFB**	**6 - 29 - 09**	**NFB-1**

Nailor Industries Inc. reserves the right to change any information concerning product or pricing without notice.