



QUADRANT BLANKS FOR MODELS RNS3 AND ARNS3 ROUND NECK DIFFUSERS

CEILING DIFFUSER ACCESSORY MODEL/ACCESSORY: 4293/QB



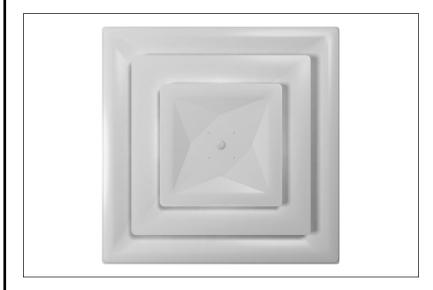

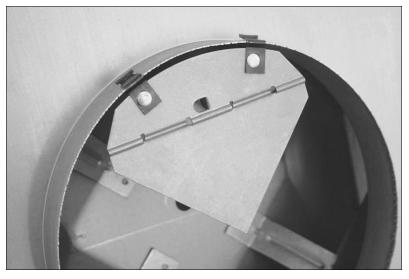

Quadrant Blanks

4293 QB for Models RNS3, ARNS3 Round Neck Diffusers

QB3 3-Way Blow QB2 2-Way Blow QC2 2-Way Corner Blow QB1 1-Way Blow Model 4293 Quadrant Blanks are designed specifically for use with the RNS3 Series Square Ceiling Diffusers. The Quadrant Blanks are constructed of steel with S-Clip brackets attached to the pie-shaped piece for insertion onto the diffuser neck collar in order to provide 1, 2, or 3-way discharge as required. Quadrant Blanks are available for all neck sizes, (to blank-off areas greater than 90° [3-way blow], multiple quantities must be ordered. 2-way blow requires a quantity of two and 1-way blow requires a quantity of three, per diffuser. Quadrant Blanks are shipped loose from the factory for trouble-free installation in the field [by others]).

Nailor recommends that ALL Quadrant Blanks are affixed prior to installation of the diffuser

Required Items

- 1. Protective eyewear or safety glasses
- 2. Pair of work gloves

Installation Instructions

- The steel, pie-shaped Quadrant Blanks with S-Clips are shipped loose from the factory and shall be installed in the field (by others).
- Prior to installation, properly position the QB in the neck of the diffuser for desired directional blow. The round edge of the QB shall face the outside of the inlet, while the knife edge shall face the center of the inlet.
- The S-Clips connected to the QB shall be securely pressed onto the neck of the diffuser. Once in place, the Quadrant Blank shall be held horizontally in place at the desired location.
- 4. For additional Quadrant Blank installation, please repeat steps 1 − 3.

SCHEDULE TYPE:	Dimensions are in inches (mm).			
PROJECT:				
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	7 - 29 - 16	QB	NEW	QB-3