


## **ROUND PUNKAH LOUVER / JET NOZZLE**

ALUMINUM • HIGH VELOCITY PANEL MOUNTED • LAY-IN T-BAR

**MODEL: RPLPL** 

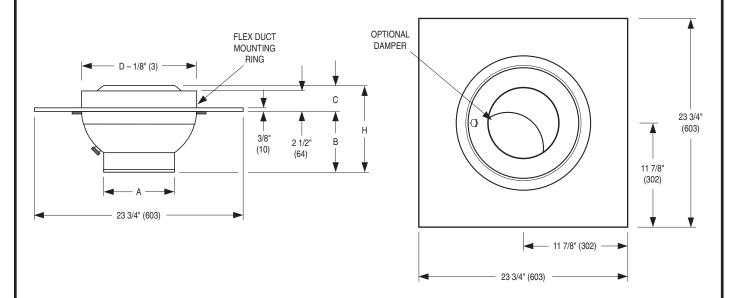

Nominal Size	Α	В	С	D (Duct Size)	Н
6	3	3 3/8	2 1/2	6	5 7/8
	(76)	(86)	(64)	(152)	(149)
8	4 3/8	4 9/16	2 1/2	8	7 1/16
	(111)	(116)	(64)	(203)	(179)
10	5 3/4	5 13/16	2 9/16	10	8 3/8
	(146)	(148)	(65)	(254)	(213)
12	7 3/8	6 5/16	2 11/16	12	9
	(187)	(160)	(68)	(305)	(229)
14	8 5/8	7 7/16	3 13/16	14	11 1/4
	(219)	(189)	(97)	(356)	(286)
16	9 3/4	8 9/16	4 7/16	16	13
	(248)	(217)	(113)	(406)	(330)
18	10 1/2	9 13/16	3 15/16	18	13 3/4
	(267)	(249)	(100)	(457)	(349)
20	12 3/8	11 3/16	4 9/16	20	15 3/4
	(314)	(284)	(116)	(508)	(400)

Inches are measured to the nearest 1/16" (2).

## **DESCRIPTION:**

- 1. Material: Aluminum construction.
- 2. Model RPLPL Round Punkah Louver Panel Lay-in is a high velocity jet nozzle that is ideally suited for industrial, institutional or commercial applications requiring accurate directional control of a concentrated column of air. The jet nozzles are housed in a square panel that has been designed for panel lay-in T-Bar ceiling grids. The versatile design offers low noise levels, low pressure requirements, easy finger tip adjustment and directional air pattern control  $\pm\,35^\circ$  deflection with full  $360^\circ$  rotation.
- 3. GK Foam Gasket is standard.
- 4. Flex duct mounting collar is included. Install easily in T-Bar ceiling grid.
- 5. Standard finish is AW Appliance White.

SCHEDULE TYPE	Dimensions are in inches (mm).				
PROJECT	Differsions are in filtries (fillin).				
ENGINEER	DATE	B SERIES	SUPERSEDES	DRAWING NO.	
CONTRACTOR	3 - 21 - 19	RPL	3 - 7 - 19	RPL-3	

## **OPTIONS:**

APD Aperture Damper
(Stainless Steel Damper Hardware)
Finish:

☐ SP Special. Specify: \_\_\_\_\_.