




SQUARE CEILING DIFFUSER WITH ROUND PLAQUE FACE ARCHITECTURAL • ROUND NECK • STEEL MODEL: UNI-RP

TYPE L Lay-in T-Bar

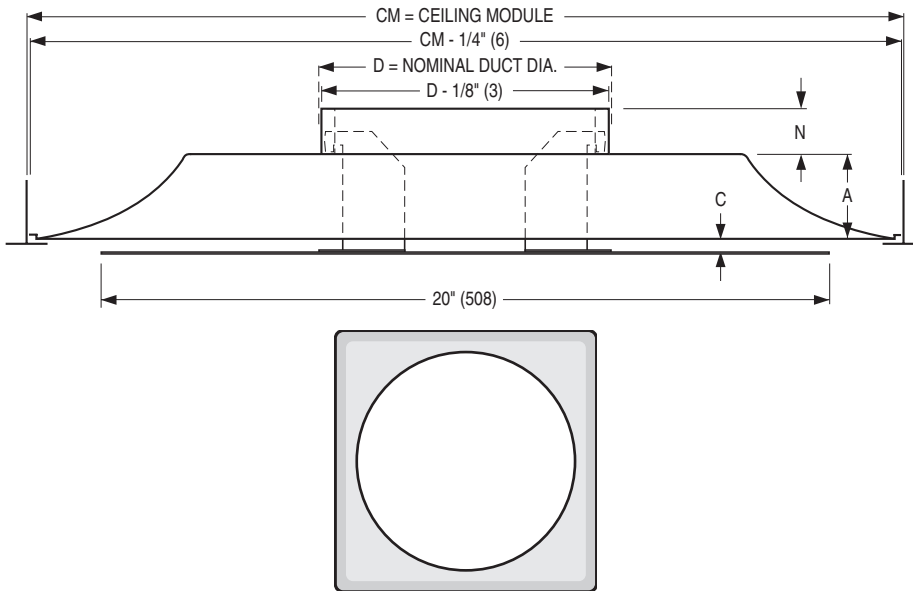

Dimensional Data

CM		Imperial Units (inches)						Metric Units (mm)					
Imperial Modules	Metric Modules	Duct Size D	N	A	B	C	F	Duct Size D	N	A	B	C	F
24 x 24	600 x 600	6, 8, 10, 12, 14, 15	1 1/4	2 5/16	22	3/8	24 3/4	152, 203, 254, 305, 356, 381	32	59	559	10	629

DESCRIPTION:

1. Material: Corrosion-resistant steel.
2. The UNI-RP Diffuser has been designed to provide both the unobtrusive appearance for architectural excellence and engineered performance. Unique neck bracketry is virtually invisible from a normal viewing position, giving the appearance that the plaque face floats below the backpan. There are no visible corner posts as on competitor's models to detract from the aesthetically clean design.
3. The diffuser delivers a tight 360° radial horizontal pattern allowing high turn down ratios with no dumping. Excellent for VAV systems.
4. The diffuser features a stamped one-piece outer-cone which eliminates mitered corners and a round inner face panel with a clean appearance.
5. A spring clip arrangement permits quick, easy installation and removal of the inner core assembly.
6. Standard finish is AW Appliance White.

OPTIONS:

- ☐ EX External Foil-Back Insulation, installed
- ☐ EXB External Foil-Back Insulation, ships loose
- ☐ MIB Molded Insulation Blanket - R-6.0 (24 x 24 only)
- ☐ EQT Earthquake Tabs

Finish:

- ☐ SP Special. Specify _____.

QB Quadrant Blanks:

- ☐ QB3 3-Way Blow
- ☐ QC2 2-Way Corner Blow
- ☐ QB2 2-Way Opposite Blow
- ☐ QB1 1-Way Blow

Fineline® is a registered trademark of USG Interiors Inc.
Dimensions are in inches (mm).

SCHEDULE TYPE:

PROJECT:

ENGINEER:


CONTRACTOR:

TYPE L Surface Mount

Hard duct connection recommended.

CM = CEILING MODULE

CEILING OPENING = B

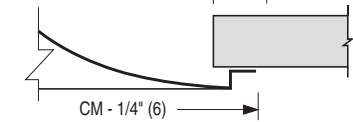


TYPE L Surface Mount With DFA

Drywall/Plaster frame. Recommended for flexible duct connection and ceiling access

CEILING OPENING = CM + 1/4" (6)

CM = CEILING MODULE


CM - 1/4" (6)



TYPE S Surface Mount

CM = CEILING MODULE


CEILING OPENING = CM - 1" (25)



TYPE F Fineline®

CM = CEILING MODULE


CM - 1/4" (6)

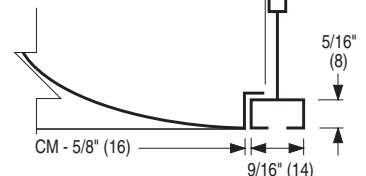

TYPE TL Tegular

CM = CEILING MODULE

CM - 1/4" (6)

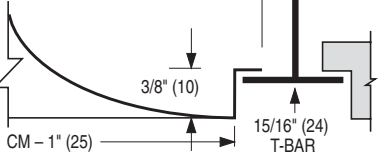

TYPE SP Spline

For one directional exposed T-Bar or fully concealed grid. 1 spline on two opposite sides. Steel lift brackets on other.

CM = CEILING MODULE



DATE

B SERIES

SUPERSEDES

DRAWING NO.

7 - 22 - 26

UNI

1 - 24 - 17

UNI-RP