

LOW LEAKAGE CONTROL DAMPER STEEL

MODELS: 1010 & 1020

The 1010/20 Series are Nailor's most widely used low leakage control dampers and are the standard choice for use in the majority of low to medium velocity and pressure commercial HVAC systems. They are low cost, high quality dampers that meet or exceed the majority of standard specification requirements. They meet the frequently specified leakage criteria of less than 10 cfm per sq. ft. @ 4" w.g. The design features include a sturdy hat channel frame with die-formed corner gussets for reinforcement and structural strength, a vee groove blade design that maximizes strength and zero maintenance concealed linkage (out of the air stream) for reduced pressure drop and air turbulence.

RATINGS:

VELOCITY: Up to 3000 fpm (15.2 m/s)
PRESSURE: Up to 5" wg. (1.2 kPa)
LEAKAGE: 4 cfm/sq. ft. @ 1" wg (20 l/s/m² @ 0.25 kPa)
 8 cfm/sq. ft. @ 4" wg (41 l/s/m² @ 1.0 kPa)

TEMPERATURE RANGE:

-50°F to +180°F (-46°C to +82°C).

STANDARD CONSTRUCTION:

FRAME: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) galvanized steel hat channel with die-formed corner gussets. Low profile (flat top and bottom) on dampers 10" (254) high and under.

BLADES: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) galv. steel vee groove design. Parallel or opposed action.

LINKAGE: Concealed type totally enclosed within the frame and out of the airstream. Plated steel.

BEARINGS: 1/2" (13) dia. Celcon[®].

AXLES: 1/2" (13) dia. plated steel double bolted to blades.

DRIVE SHAFT: 6" (152) long x 1/2" (13) dia. rigid drive shaft on all single section dampers. A 1/2" (13) or 1" (25) dia. factory installed jackshaft is standard on all multiple section dampers. See multi-section detail 1000 MSI.

BLADE SEALS: Dual durometer bulb type extruded PVC.

JAMB SEALS: Compression type cambered metal.




Sizes (Duct W x H):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade 6" x 4" (152 x 102)	Two Blades (parallel or opposed) 6" x 10" (152 x 254)	48" x 72" (1219 x 1829)	Unlimited

OPTIONS:

- ☐ **BO** Oilite bearings
- ☐ **304** Type 304 Stainless Steel construction
- ☐ **SMP** Actuator side mounting plate
- ☐ **DLO** Lock-on drive shaft
- ☐ Other _____

Nailor offers a wide selection of electric actuators for factory or field installation.

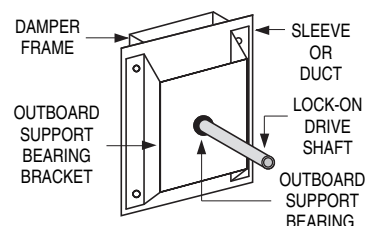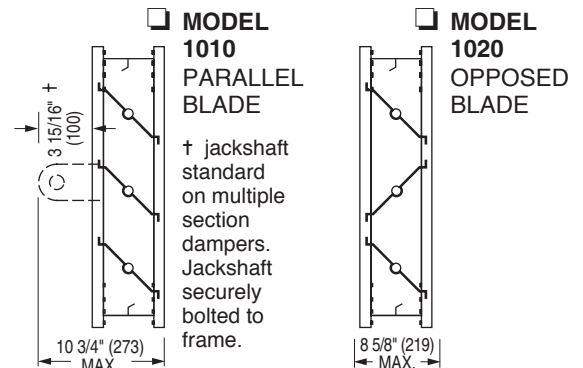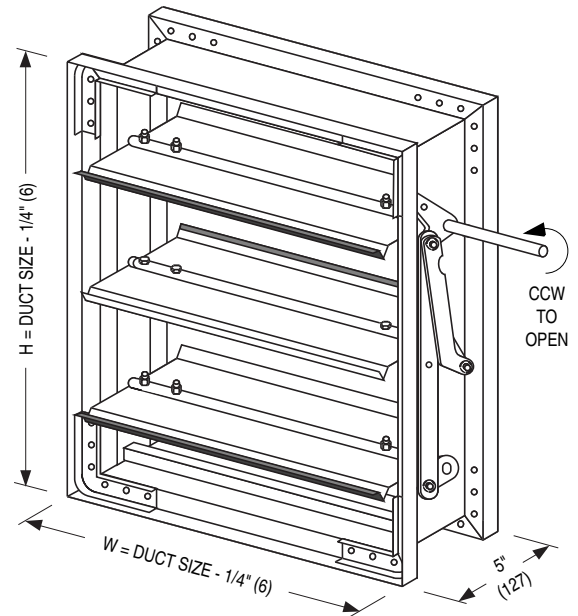

Optional lock-on drive shaft support bracket detail.

The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.

SCHEDULE TYPE:



PROJECT:

ENGINEER:

CONTRACTOR:

Page 1 of 2
 Dimensions are in inches (mm).

DATE	A SERIES	SUPERSEDES	DRAWING NO.
5 - 15 - 26	1000	4 - 9 - 26	1000-1

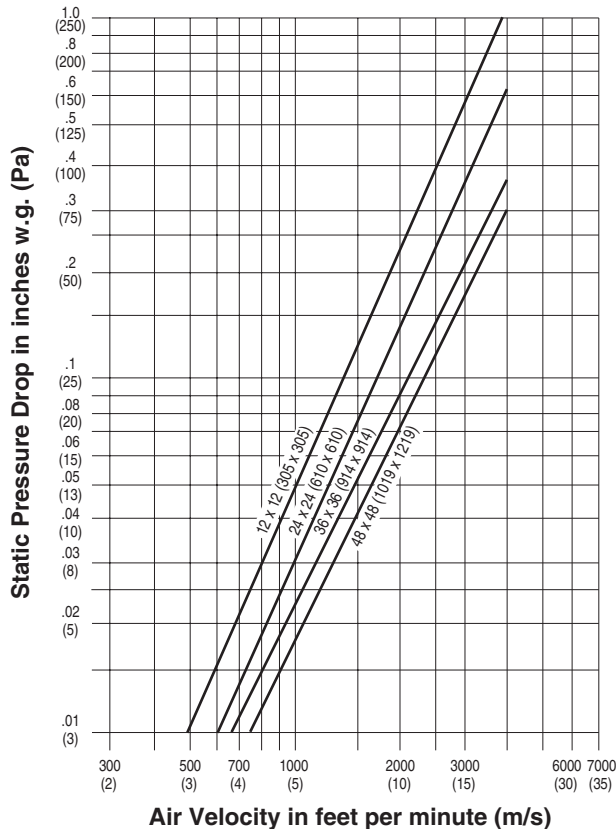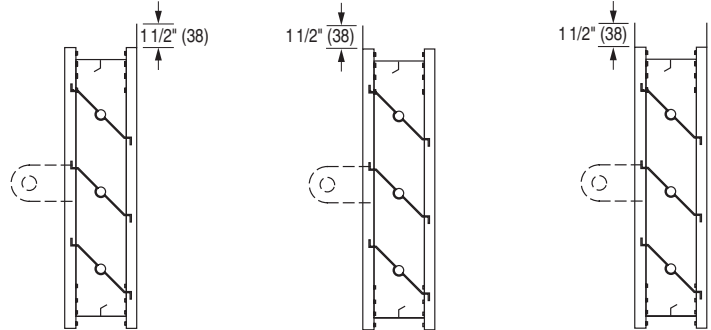PERFORMANCE DATA:
MODELS: 1010 AND 1020
PRESSURE DROP (damper fully open):

FRAME OPTIONS:
☐ **FF** Flanged Front ☐ **FR** Flanged Rear ☐ **FD** Double Flange

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *	
			% of Max. Flow	Cfm/ Sq. Ft.
48" (1219)	2.5" w.g.	3000 fpm	0.18	3.5
36" (914)	3.0" w.g.	3000 fpm	0.2	4.0
24" (610)	4.0" w.g.	3000 fpm	0.23	4.5
12" (305)	5.0" w.g.	3000 fpm	0.33	6.6

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 2 of 2
 Dimensions are in inches (mm).

DATE
A SERIES
SUPERSEDES
DRAWING NO.

5 - 15 - 26

1000

4 - 9 - 26

1000-1

LOW LEAKAGE CONTROL DAMPER STEEL

MODELS: 1010 & 1020

The 1010/20 Series are Nailor's most widely used low leakage control dampers and are the standard choice for use in the majority of low to medium velocity and pressure commercial HVAC systems. They are low cost, high quality dampers that meet or exceed the majority of standard specification requirements. They meet the frequently specified leakage criteria of less than 10 cfm per sq. ft. @ 4" w.g. The design features include a sturdy hat channel frame with die-formed corner gussets for reinforcement and structural strength, a vee groove blade design that maximizes strength and zero maintenance concealed linkage (out of the air stream) for reduced pressure drop and air turbulence.

RATINGS:

VELOCITY: Up to 3000 fpm (15.2 m/s)
PRESSURE: Up to 5" wg. (1.2 kPa)
LEAKAGE: 4 cfm/sq. ft. @ 1" wg. (20 l/s/m² @ 0.25 kPa)
 8 cfm/sq. ft. @ 4" wg. (41 l/s/m² @ 1.0 kPa)

TEMPERATURE RANGE: -50°F to +180°F (-46°C to +82°C).

STANDARD CONSTRUCTION:

FRAME: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) galvanized steel hat channel with die-formed corner gussets. Low profile (flat top and bottom) on dampers 10" (254) high and under.

BLADES: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) galv. steel vee groove design. Parallel or opposed action.

LINKAGE: Concealed type totally enclosed within the frame and out of the airstream. Plated steel.

BEARINGS: 1/2" (13) dia. Celcon®.

AXLES: 1/2" (13) dia. plated steel double bolted to blades.

DRIVE SHAFT: 6" (152) long x 1/2" (13) lock-on drive shaft on all single section dampers. A 1/2" (13) or 1" (25) dia. factory installed jackshaft is standard on all multiple section dampers. See multi-section detail 1000 MSI.

BLADE SEALS: Dual durometer bulb type extruded PVC.

JAMB SEALS: Compression type cambered metal.




Sizes (Duct W x H):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade 6" x 4" (152 x 102)	Two Blades (parallel or opposed) 6" x 10" (152 x 254)	48" x 72" (1219 x 1829)	Unlimited

OPTIONS:

- ☐ **BO** Oilite bearings
- ☐ **304** Type 304 Stainless Steel construction
- ☐ **SMP** Actuator side mounting plate
- ☐ **BSP** Polyurethane foam blade seals
- ☐ **JSS** Stainless steel jamb seals
- ☐ **Other** _____

Nailor offers a wide selection of electric actuators for factory or field installation.

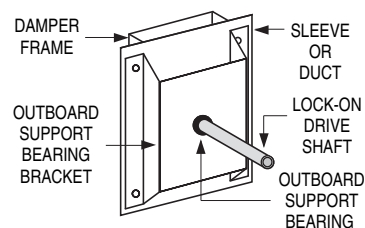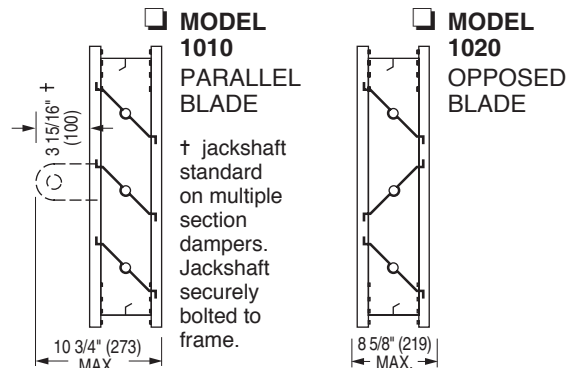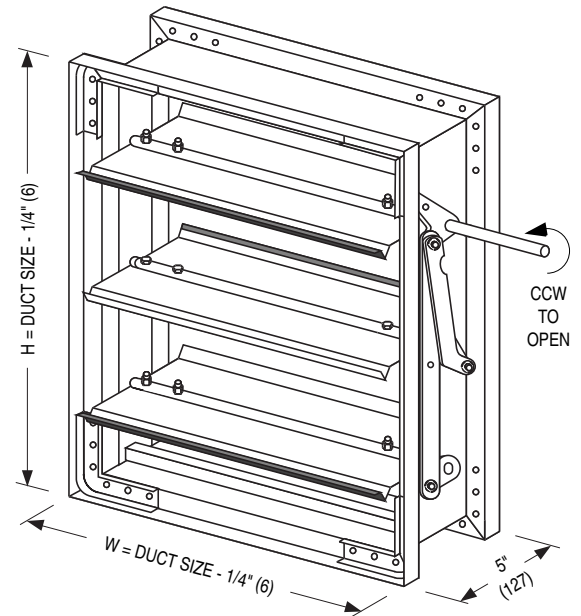

Optional lock-on drive shaft support bracket detail.

The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.

SCHEDULE TYPE:



PROJECT:

ENGINEER:

CONTRACTOR:

Page 1 of 2
 Dimensions are in inches (mm).

DATE	C SERIES	SUPERSEDES	DRAWING NO.
5 - 15 - 26	1000	4 - 14 - 26	1000-1

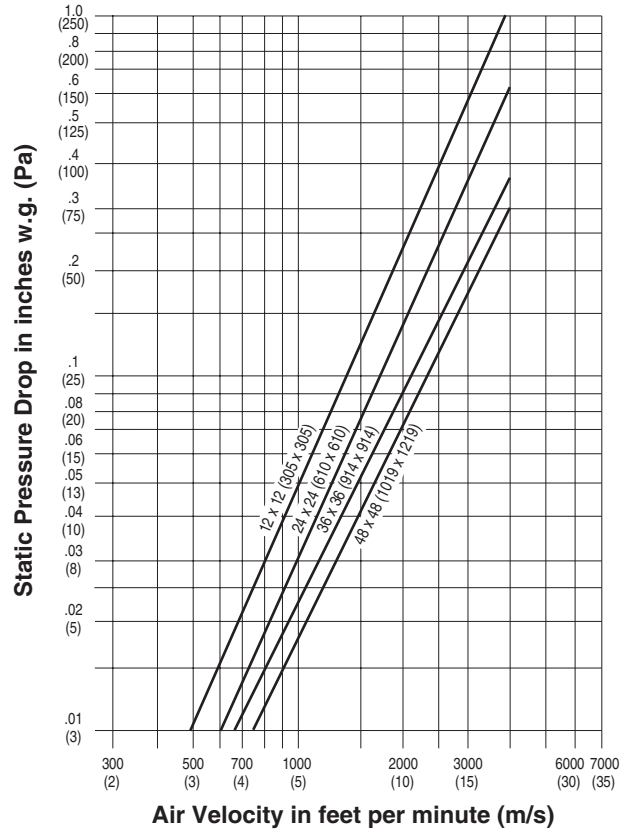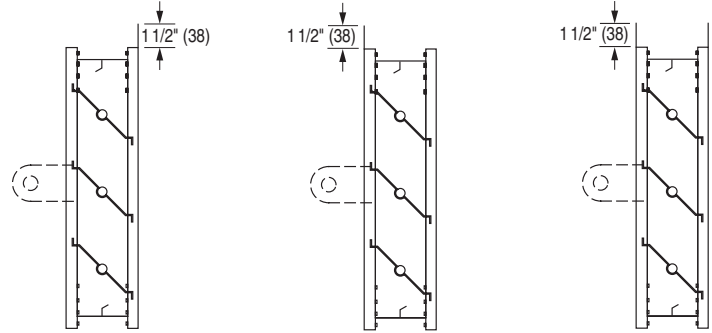PERFORMANCE DATA:
MODELS: 1010 AND 1020
PRESSURE DROP (damper fully open):

FRAME OPTIONS:
☐ **FF** Flanged Front ☐ **FR** Flanged Rear ☐ **FD** Double Flange

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *	
			% of Max. Flow	Cfm/Sq. Ft.
48" (1219)	2.5" w.g.	3000 fpm	0.18	3.5
36" (914)	3.0" w.g.	3000 fpm	0.2	4.0
24" (610)	4.0" w.g.	3000 fpm	0.23	4.5
12" (305)	5.0" w.g.	3000 fpm	0.33	6.6

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 2 of 2
 Dimensions are in inches (mm).

DATE
C SERIES
SUPERSEDES
DRAWING NO.

5 - 15 - 26

1000

4 - 14 - 26

1000-1

LOW LEAKAGE CONTROL DAMPER STEEL • STANDARD PERFORMANCE MODELS: 1010 & 1020 WITH 304 STAINLESS STEEL CONSTRUCTION OPTION

Nailor Models 1010/1020 with optional 304 Stainless Steel construction provide an enduring solution for corrosive environment commercial and industrial HVAC and process applications. The proven vee groove blade design and sturdy hat channel mitered frame with reinforcing corner gussets afford solid performance that will withstand many normally harsh atmospheric and process elements. These dampers are engineered to meet the requirements of the International Energy Conservation Code (IECC), making them ideal for applications where energy conservation and thermal performance are critical.

RATINGS:

Velocity: Up to 3000 fpm (15.2 m/s)
Pressure: Up to 5" wg. (1.2 kPa)
Leakage: 4 cfm/sq. ft. @ 1" wg (20 l/s/m² @ 0.25 kPa)
 8 cfm/sq. ft. @ 4" wg (41 l/s/m² @ 1.0 kPa)

Temperature

Range: -50°F to +180°F (-46°C to +82°C).

STANDARD CONSTRUCTION:

Frame: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) Type 304 stainless steel hat channel with stainless steel corner gussets. Frame and corner gussets are welded for rigidity. Low profile (flat top and bottom) on dampers 10" (254) high and under.

Blades: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) Type 304 stainless steel vee groove design. Parallel or opposed action.

Linkage: Concealed type totally enclosed within the frame and out of the airstream. Type 304 stainless steel.

Bearings: 1/2" (13) dia. Celcon®.

Axles: 1/2" (13) dia. plated steel double bolted to blades.

Drive Shaft: 6" (152) long x 1/2" (13) dia. stainless steel rigid drive shaft on all single section dampers. A 1/2" (13) or 1" (25) dia. factory installed jackshaft is standard on all multiple section dampers. See multi-section detail 1000 MSI.

Blade Seals: Dual durometer bulb type extruded PVC.

Jamb Seals: Compression type cambered stainless steel.





Sizes (Duct W x H):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade 6" x 4" (152 x 102)	Two Blades (parallel or opposed) 6" x 10" (152 x 254)	48" x 72" (1219 x 1829)	Unlimited

OPTIONS:

- ☐ **AMP** Actuator mounting side plate
☐ **DLO** Lock-on drive shaft
☐ **Other** _____

Nailor offers a wide selection of pneumatic and electric actuators for factory or field installation.

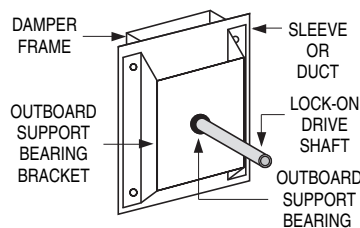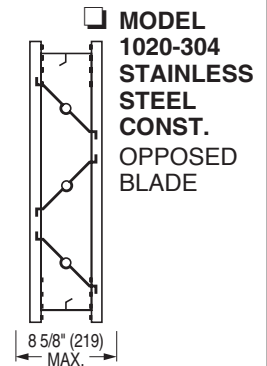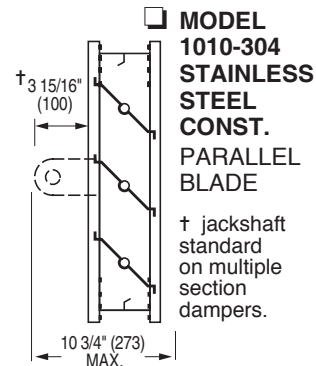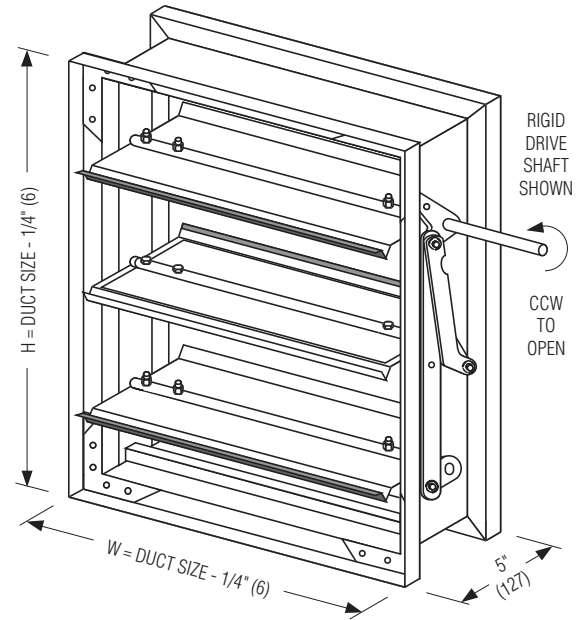

Optional lock-on drive shaft support bracket detail.

The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 1 of 2
 Dimensions are in inches (mm).

DATE	A SERIES	SUPERSEDES	DRAWING NO.
5- 15 - 26	1000	4 - 14 - 26	1000-1C



LOW LEAKAGE CONTROL DAMPER STEEL • STANDARD PERFORMANCE MODELS: 1010 & 1020 WITH 304 STAINLESS STEEL CONSTRUCTION OPTION • PERFORMANCE DATA

PERFORMANCE DATA: MODELS: 1010 AND 1020

FRAME OPTIONS:

☐ **FF** Flanged Front
 ☐ **FR** Flanged Rear
 ☐ **FD** Double Flange

PRESSURE DROP (damper fully open):

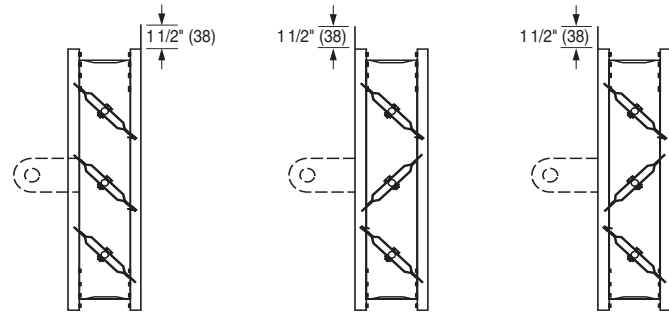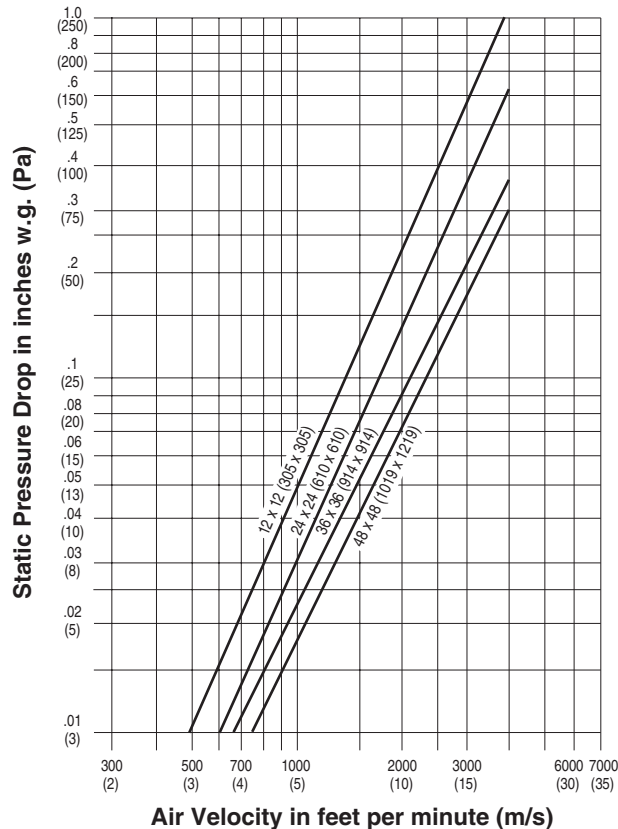

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *	
			% of Max. Flow	Cfm/Sq. Ft.
48" (1219)	2.5" w.g.	3000 fpm	0.18	3.5
36" (914)	3.0" w.g.	3000 fpm	0.2	4.0
24" (610)	4.0" w.g.	3000 fpm	0.23	4.5

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 2
 Dimensions are in inches (mm).

DATE	A SERIES	SUPERSEDES	DRAWING NO.
5- 15 - 26	1000	4 - 14 - 26	1000-1C

LOW LEAKAGE CONTROL DAMPER STEEL • STANDARD PERFORMANCE MODELS: 1010 & 1020 WITH 304 STAINLESS STEEL CONSTRUCTION OPTION

Nailor Models 1010/1020 with optional 304 Stainless Steel construction provide an enduring solution for corrosive environment commercial and industrial HVAC and process applications. The proven vee groove blade design and sturdy hat channel mitered frame with reinforcing corner gussets afford solid performance that will withstand many normally harsh atmospheric and process elements. The design also features stainless steel zero-maintenance concealed blade linkage for reduced pressure drop and turbulence, and stainless steel axles, bushings and hardware for long lasting operation.

RATINGS:

Velocity: Up to 3000 fpm (15.2 m/s)
Pressure: Up to 5" wg. (1.2 kPa)
Leakage: 4 cfm/sq. ft. @ 1" wg (20 l/s/m² @ 0.25 kPa)
 8 cfm/sq. ft. @ 4" wg (41 l/s/m² @ 1.0 kPa)

Temperature

Range: -50°F to +180°F (-46°C to +82°C).

STANDARD CONSTRUCTION:

Frame: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) Type 304 stainless steel hat channel with stainless steel corner gussets. Frame and corner gussets are welded for rigidity. Low profile (flat top and bottom) on dampers 10" (254) high and under.

Blades: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) Type 304 stainless steel vee groove design. Parallel or opposed action.

Linkage: Concealed type totally enclosed within the frame and out of the airstream. Type 304 stainless steel.

Bearings: 1/2" (13) dia. Celcon®.

Axles: 1/2" (13) dia. stainless steel double bolted to blades.

Drive Shaft: 6" (152) long x 1/2" (13) dia. Type 304 stainless steel lock-on drive shaft on all single section dampers. A 1/2" (13) or 1" (25) dia. factory installed jackshaft is standard on all multiple section dampers. See multi-section detail 1000 MSI.

Blade Seals: Dual durometer bulb type extruded PVC.

Jamb Seals: Compression type cambered stainless steel.


Sizes (Duct W x H):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade 6" x 4" (152 x 102)	Two Blades (parallel or opposed) 6" x 10" (152 x 254)	48" x 72" (1219 x 1829)	Unlimited

OPTIONS:


- ☐ **AMP** Actuator mounting side plate
☐ Other _____.

Nailor offers a wide selection of pneumatic and electric actuators for factory or field installation.


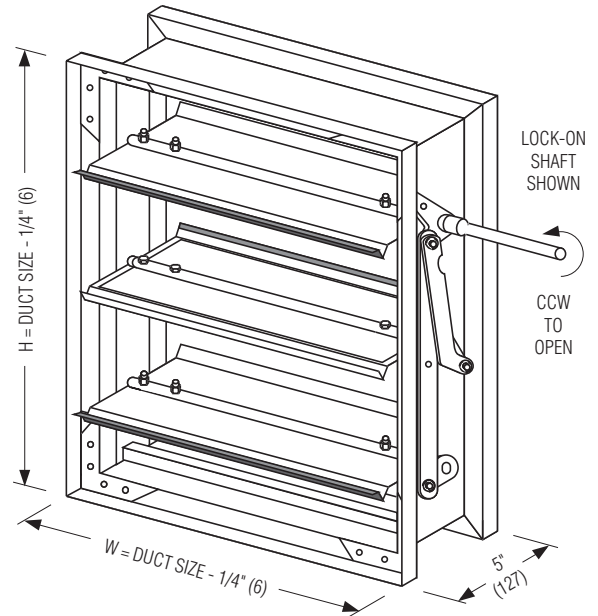


☐ **MODEL 1010-304 STAINLESS STEEL CONST. PARALLEL BLADE**

† jackshaft standard on multiple section dampers.




☐ **MODEL 1020-304 STAINLESS STEEL CONST. OPPOSED BLADE**

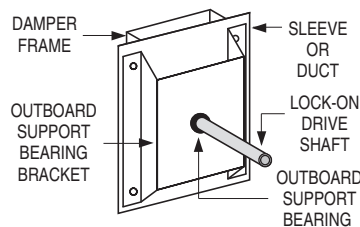

Lock-on drive shaft support bracket detail.

The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 1 of 2
 Dimensions are in inches (mm).

DATE

C SERIES

SUPERSEDES

DRAWING NO.

5 - 15 - 26

1000

4 - 14 - 26

1000-1C



LOW LEAKAGE CONTROL DAMPER STEEL • STANDARD PERFORMANCE MODELS: 1010 & 1020 WITH 304 STAINLESS STEEL CONSTRUCTION OPTION • PERFORMANCE DATA

PERFORMANCE DATA: MODELS: 1010 AND 1020

FRAME OPTIONS:

☐ FF Flanged Front
 ☐ FR Flanged Rear
 ☐ FD Double Flange

PRESSURE DROP (damper fully open):

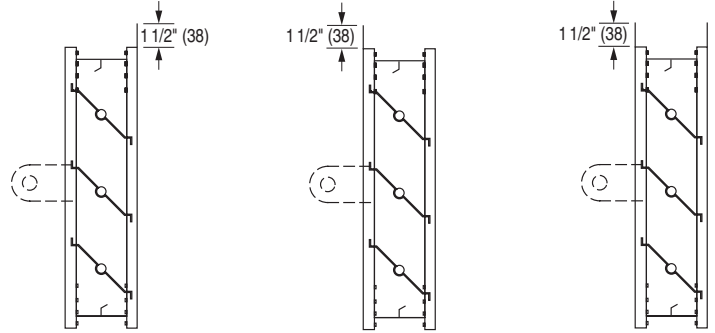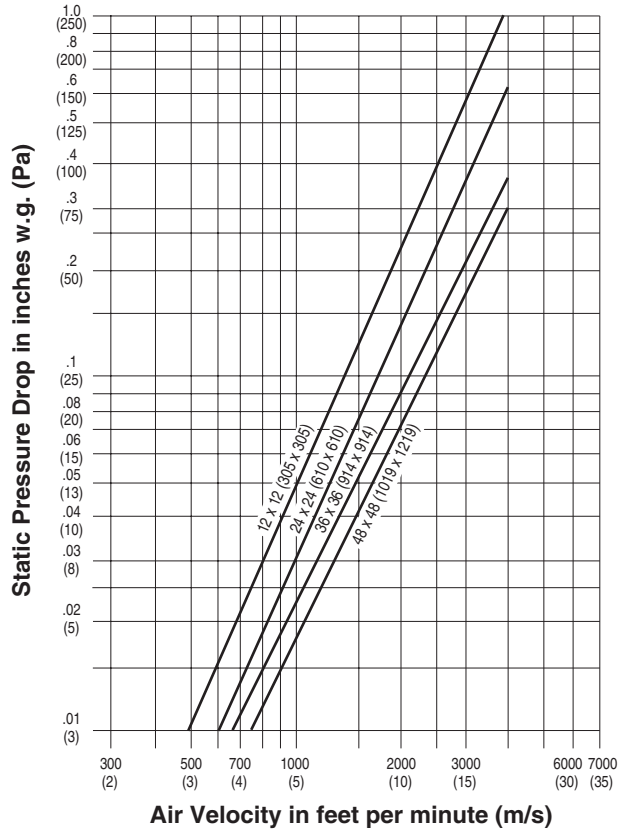

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *	
			% of Max. Flow	Cfm/Sq. Ft.
48" (1219)	2.5" w.g.	3000 fpm	0.18	3.5
36" (914)	3.0" w.g.	3000 fpm	0.2	4.0
24" (610)	4.0" w.g.	3000 fpm	0.23	4.5

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 2
 Dimensions are in inches (mm).

DATE

C SERIES

SUPERSEDES

DRAWING NO.

5 - 15 - 26

1000

4 - 14 - 26

1000-1C

The 1012/22 Series are Nailor's most widely used unsealed dampers and are the standard choice for use in the majority of low to medium pressure and velocity commercial HVAC systems. They are low cost, high quality dampers that meet or exceed the majority of standard specification requirements. The design features include a sturdy hat channel frame with die-formed corner gussets for reinforcement and structural strength equivalent to 13 gauge channel type frames, a vee groove blade design that maximizes strength and zero maintenance concealed linkage (out of the air stream) for reduced pressure drop and air turbulence.

RATINGS:

Velocity: Up to 3000 fpm (15.2 m/s)
Pressure: Up to 5" wg. (1.2 Kpa)
Leakage: 4 cfm/sq. ft. @ 1" wg. (20 l/s/m² @ 0.25 kPa)
 8 cfm/sq. ft. @ 4" wg. (41 l/s/m² @ 1.0 kPa)

Temperature Range: -50°F to +180°F (-46°C to +82°C)

STANDARD CONSTRUCTION:

Frame: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) galvanized steel hat channel with die-formed corner gussets. Low profile (flat top and bottom) on dampers 10" (254) high and under.

Blades: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) galv. steel vee groove design. Parallel or opposed action.

Linkage: Concealed type totally enclosed within the frame and out of the airstream. Plated steel.

Bearings: 1/2" (13) dia. Celcon[®].

Axles: 1/2" (13) dia. plated steel double bolted to blades.

Drive Shaft: 6" (152) long x 1/2" (13) dia. rigid drive shaft on all single section dampers. A 1/2" (13) or 1" (25) dia. factory installed jackshaft is standard on all multiple section dampers. See multi-section detail 1000 MSI.


Sizes (Duct W x H):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade 6" x 4" (152 x 102)	Two Blades (parallel or opposed) 6" x 10" (152 x 254)	48" x 72" (1219 x 1829)	Unlimited


OPTIONS:

- ☐ **BO** Oilite bearings
- ☐ **304** Stainless Steel construction
- ☐ **AMP** Actuator mounting side plate
- ☐ **BSP** Polyurethane foam blade seals
- ☐ **JSM** Metallic jamb seals
- ☐ **DLO** Lock-on drive shaft
- ☐ Other _____.



Nailor offers a wide selection of pneumatic and electric actuators for factory or field installation.

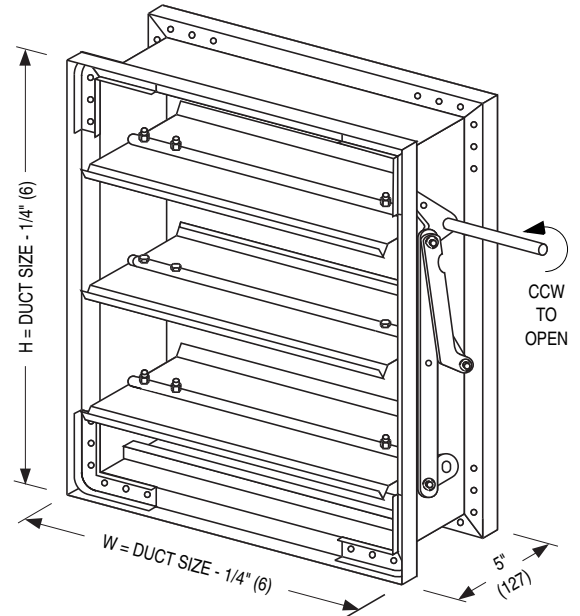


☐ **MODEL 1012**
PARALLEL BLADE
 † jackshaft standard on multiple section dampers. Jackshaft securely bolted to frame.



☐ **MODEL 1022**
OPPOSED BLADE

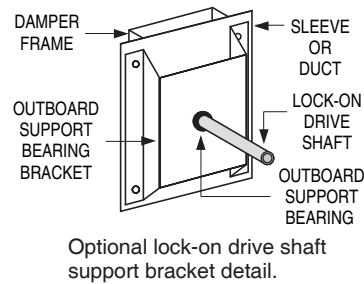



The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.


SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 1 of 2
 Dimensions are in inches (mm).

DATE	A SERIES	SUPERSEDES	DRAWING NO.
2 - 25 - 26	1000	12 - 4 - 12	1000-2

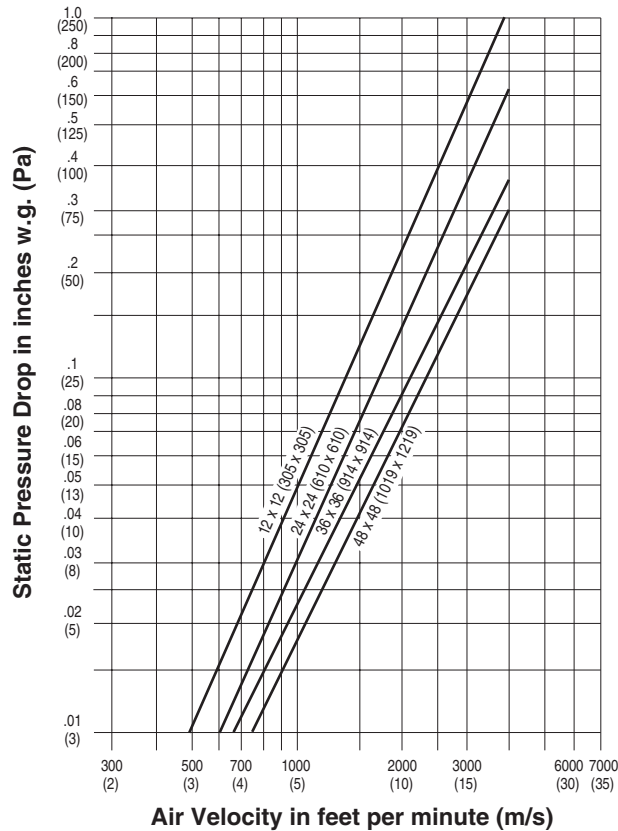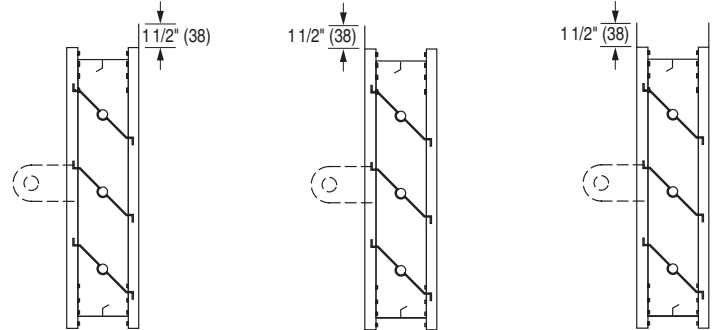PERFORMANCE DATA:
MODELS: 1012 AND 1022
PRESSURE DROP (damper fully open):

FRAME OPTIONS:
☐ **FF** Flanged Front ☐ **FR** Flanged Rear ☐ **FD** Double Flange

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *			
			W/O Seals		W/Seals	
			% of Max. Flow	Cfm/ Sq. Ft.	% of Max. Flow	Cfm/ Sq. Ft.
48" (1219)	2.5" w.g.	3000 fpm	1.9	38	0.48	9.5
36" (914)	3.0" w.g.	3000 fpm	2.15	43	0.54	10.8
24" (610)	4.0" w.g.	3000 fpm	2.35	47	0.57	11.3
12" (305)	5.0" w.g.	3000 fpm	3.1	62	0.8	16

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 2 of 2
 Dimensions are in inches (mm).

DATE	A SERIES	SUPERSEDES	DRAWING NO.
2 - 25 - 26	1000	12 - 4 - 12	1000-2

The 1012/22 Series are Nailor's most widely used unsealed dampers and are the standard choice for use in the majority of low to medium pressure and velocity commercial HVAC systems. They are low cost, high quality dampers that meet or exceed the majority of standard specification requirements. The design features include a sturdy hat channel frame with die-formed corner gussets for reinforcement and structural strength equivalent to 13 gauge channel type frames, a vee groove blade design that maximizes strength and zero maintenance concealed linkage (out of the air stream) for reduced pressure drop and air turbulence.

RATINGS:

Velocity: Up to 3000 fpm (15.2 m/s)
Pressure: Up to 5" wg. (1.2 Kpa)
Leakage: 4 cfm/sq. ft. @ 1" wg. (20 l/s/m² @ 0.25 kPa)
 8 cfm/sq. ft. @ 4" wg. (41 l/s/m² @ 1.0 kPa)

Temperature Range: -50°F to +180°F (-46°C to +82°C)

STANDARD CONSTRUCTION:

Frame: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) galvanized steel hat channel with die-formed corner gussets. Low profile (flat top and bottom) on dampers 10" (254) high and under.

Blades: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) galv. steel vee groove design. Parallel or opposed action.

Linkage: Concealed type totally enclosed within the frame and out of the airstream. Plated steel.

Bearings: 1/2" (13) dia. Celcon®.

Axles: 1/2" (13) dia. plated steel double bolted to blades.

Drive Shaft: 6" (152) long x 1/2" (13) dia. lock-on drive shaft on all single section dampers. A 1/2" (13) or 1" (25) dia. factory installed jackshaft is standard on all multiple section dampers. See multi-section detail 1000 MSI.


Sizes (Duct W x H):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade 6" x 4" (152 x 102)	Two Blades (parallel or opposed) 6" x 10" (152 x 254)	48" x 72" (1219 x 1829)	Unlimited

OPTIONS:


- ☐ **BO** Oilite bearings
- ☐ **304** Stainless Steel construction
- ☐ **AMP** Actuator mounting side plate
- ☐ **BSP** Polyurethane foam blade seals
- ☐ **JSM** Metallic jamb seals
- ☐ **Other** _____.

Nailor offers a wide selection of pneumatic and electric actuators for factory or field installation.


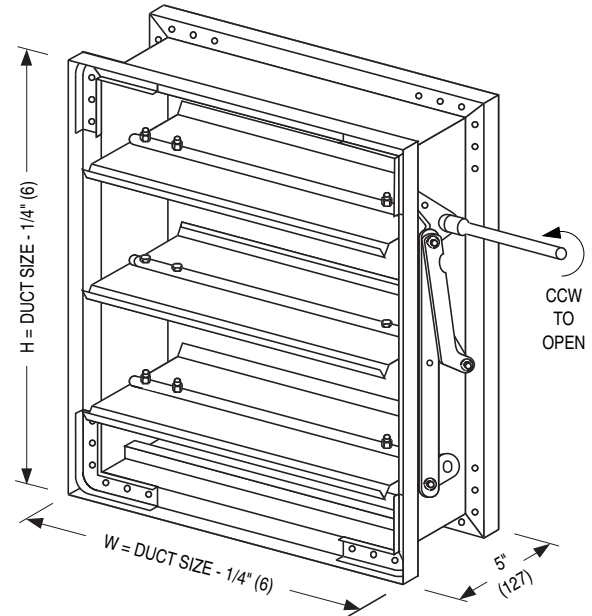


☐ **MODEL 1012**
PARALLEL BLADE


† jackshaft standard on multiple section dampers. Jackshaft securely bolted to frame.



☐ **MODEL 1022**
OPPOSED BLADE

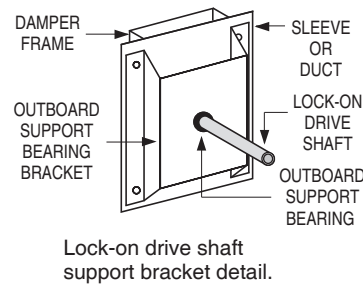



The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.


SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 1 of 2
 Dimensions are in inches (mm).

DATE	C SERIES	SUPERSEDES	DRAWING NO.
2 - 25 - 26	1000	12 - 4 - 12	1000-2

PERFORMANCE DATA:
MODELS: 1012 AND 1022
FRAME OPTIONS:
☐ **FF** Flanged Front ☐ **FR** Flanged Rear ☐ **FD** Double Flange

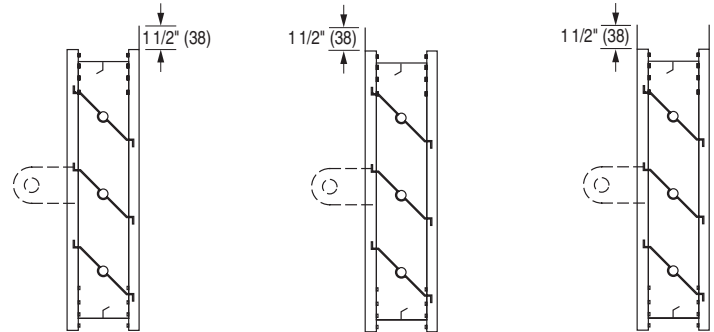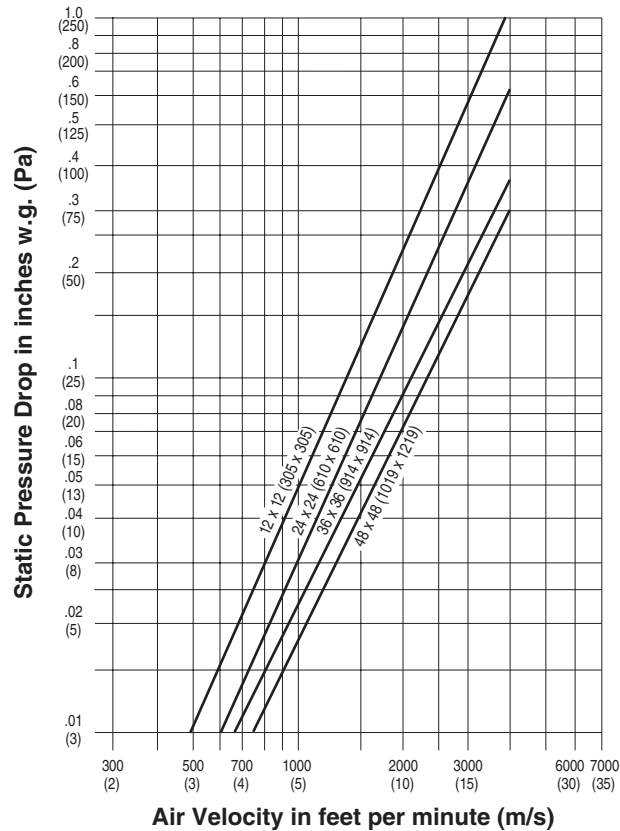PRESSURE DROP (damper fully open):

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *			
			W/O Seals		W/Seals	
			% of Max. Flow	Cfm/ Sq. Ft.	% of Max. Flow	Cfm/ Sq. Ft.
48" (1219)	2.5" w.g.	3000 fpm	1.9	38	0.48	9.5
36" (914)	3.0" w.g.	3000 fpm	2.15	43	0.54	10.8
24" (610)	4.0" w.g.	3000 fpm	2.35	47	0.57	11.3
12" (305)	5.0" w.g.	3000 fpm	3.1	62	0.8	16

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 2 of 2
 Dimensions are in inches (mm).

DATE
C SERIES
SUPERSEDES
DRAWING NO.

2 - 25 - 26

1000

12 - 4 - 12

1000-2



LOW LEAKAGE CONTROL DAMPER **STEEL • STANDARD PERFORMANCE** **MODELS: 1010 & 1020 WITH CR ROUND** **TRANSITIONS OPTION**

The 1010CR/2020CR Series are Nailor's most widely used low leakage multi-blade dampers in a low leakage casing with round transition collars and are the standard choice for use in the majority of commercial HVAC systems. They meet the frequently specified leakage criteria of less than 10 cfm per sq. ft at 4" w.g. (0.5% at 2000 fpm).

STANDARD CONSTRUCTION:

Frame: 5" x 7/8" x 16 ga. (127 x 22 x 1.6) galvanized steel hat channel with die-formed corner gussets. Low profile (flat top and bottom) on dampers 10" (254) high and under.

Blades: 6" (152) wide on 5 1/2" (140) centers. 16 ga. (1.6) galvanized steel vee groove design. Parallel or opposed action.

Linkage: Concealed type totally enclosed within the frame and out of the airstream. Plated steel.

Bearings: 1/2" (13) dia. Celcon®.

Axles: 1/2" (13) dia. plated steel double bolted to blades.

Drive Shaft: 6" (152) long x 1/2" (13) dia. rigid drive shaft.

Blade Seals: Dual durometer bulb type extruded PVC.

Jamb Seals: Compression type cambered metal.

Casing: Up to 36" x 36" (914 x 914) 20 ga. (1.0) galvanized steel.
 36" x 36" (914 x 914) and up 18 ga. (1.31) galvanized steel.
 Casing is tack-welded and caulked against leakage.

Temperature Range: -50°F to +180°F (-46°C to +82°C).

Sizes (Duct Dia.):

Minimum		Maximum	
Single Section		Single Section	Multiple Section
Single Blade (parallel) 4" (102) dia.	Two Blades (parallel or opposed) 8" (203) dia.	46" (1168) dia.	n/a

OPTIONS:


- ☐ **BO** Oilite bearings
- ☐ **304** Stainless Steel construction
- ☐ **Other** _____

Nailor offers a wide selection of pneumatic and electric actuators for factory or field installation.


Performance Data - Air Leakage (Damper Closed)

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage*	
			% of Max. Flow	Cfm/Sq. Ft.
48" (1219)	2.5" w.g.	2000 fpm	.18	3.5
36" (914)	3.0" w.g.	2000 fpm	.20	4.0
24" (610)	4.0" w.g.	2000 fpm	.23	4.5
12" (305)	5.0" w.g.	2000 fpm	.33	6.6


* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA Standard 500-D, Fig. 5.5.

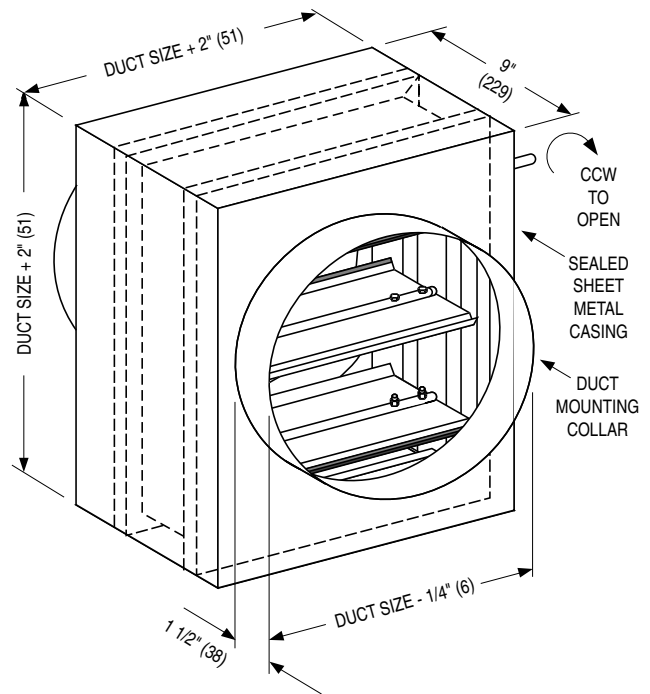


☐ **MODEL 1010CR**
PARALLEL
BLADE



☐ **MODEL 1020CR**
OPPOSED
BLADE



The low profile frame illustrated is used to maximize free area available on units 10" (254) high and under.



Pressure Drop (in. w.g.)

Damper Size	Approach Velocity (fpm)			
	750	1000	1500	2000
24" x 24" (610 x 610)	.016	.030	.07	.14
36" x 36" (914 x 914)	.013	.023	.05	.09
48" x 48" (1219 x 1219)	.010	.020	.03	.07

Tested per AMCA Standard 500-D, Fig. 5.3.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE

12 - 4 - 12

B SERIES

1000

SUPERSEDES

6 - 30 - 04

DRAWING NO.

1000-3



CONTROL DAMPER
ROUND • STEEL
LOW LEAKAGE
MODEL: 1090

Model 1090 is an ultra-low leakage steel butterfly control damper which has been designed for all types of round ductwork applications. Suitable for use in low to medium pressure and velocity commercial HVAC systems, the 1090 installs quickly and easily, saving money on installation costs.

Design features a sturdy beaded casing for superior rigidity, a 14 ga. (2.0) equivalent laminated blade double bolted to the drive shaft for maximum strength, long life corrosion resistant synthetic bearings and blade seals for low leakage requirements. The damper can be used for two position or modulating control using electric or pneumatic actuators and can also be used as a manual balancing damper or when positive shut-off is required by utilizing an optional hand locking quadrant. A variety of options are available to meet specific installation requirements and a comprehensive selection of electric or pneumatic actuators are available for factory or field mounting.

STANDARD CONSTRUCTION:

- Frame:** 20 ga. (1.0) corrosion-resistant steel with stiffening beads.
- Blade:** 2 x 20 ga. (1.0) corrosion-resistant steel laminated together, equivalent to 14 ga. (2.0). Open and close end stops. 90 degree rotation. CCW to open.
- Bearings:** 1/2" (13) dia. Celcon®.
- Drive Shaft/Axle:** 1/2" (13) dia. plated steel double bolted to blade. Axle extends approx. 6" (152) beyond frame.
- Blade Seal:** Cross-linked polyethylene.

Sizes (Duct W x H):

Minimum	Maximum
Single Section	Single Section
4" (102) dia.	24" (610) dia.



Temperature Range: -50°F to 180°F (-46°C to 82°C)

OPTIONS:

- ☐ **BSS** Silicone blade seals (-50°F to 250°F)
- ☐ **BO** Oilite bearings
- ☐ **BS** Stainless steel bearings
- ☐ **AMB** Actuator mounting bracket
- ☐ **HLQ** Hand locking quadrant
- ☐ **HLQ2** Hand locking quadrant with 2" (51) stand-off bracket
- ☐ **304** Type 304 Stainless steel construction
- ☐ Special features _____.


ACTUATORS:

Nailor offers a comprehensive selection of electric and pneumatic actuators for factory or field installation.

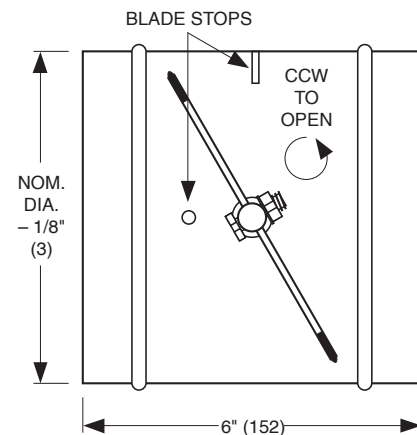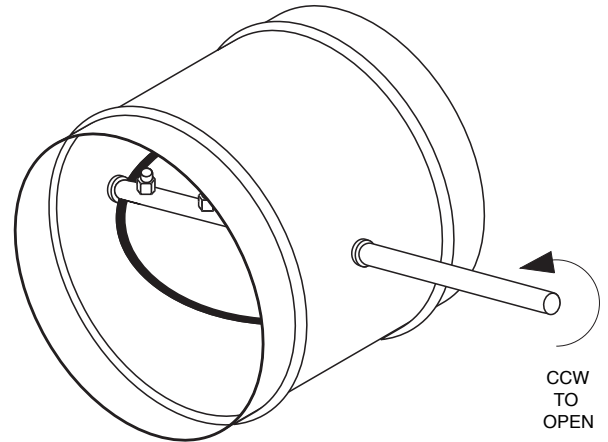

**OPTIONAL
HAND LOCKING
QUADRANT**

7/8" (22) stand-off



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm)

DATE

B SERIES

SUPERSEDES

DRAWING NO.

9 - 3 - 26

1000

4 - 28 - 14

1000-6



CONTROL DAMPER

ROUND • STEEL • LOW LEAKAGE

PERFORMANCE DATA

MODEL: 1090

MAXIMUM SYSTEM PRESSURE

Maximum Damper Diameter	Maximum System Pressure
24" (610)	6" w.g. (1.5 kPa)
18" (457)	6" w.g. (1.5 kPa)
12" (305)	8" w.g. (2 kPa)
6" (152)	10" w.g. (2.5 kPa)


Note: Maximum Face Velocity = 4000 fpm (20 m/s).

LEAKAGE: CLASS I

Less than 4 cfm/sq. ft. @ 1" w.g. (0.02 m³/s/m² @ 250 kPa).


Less than 8 cfm/sq. ft. @ 4" w.g. (0.04 m³/s/m² @ 1 kPa).

PRESSURE DROP (damper fully open)

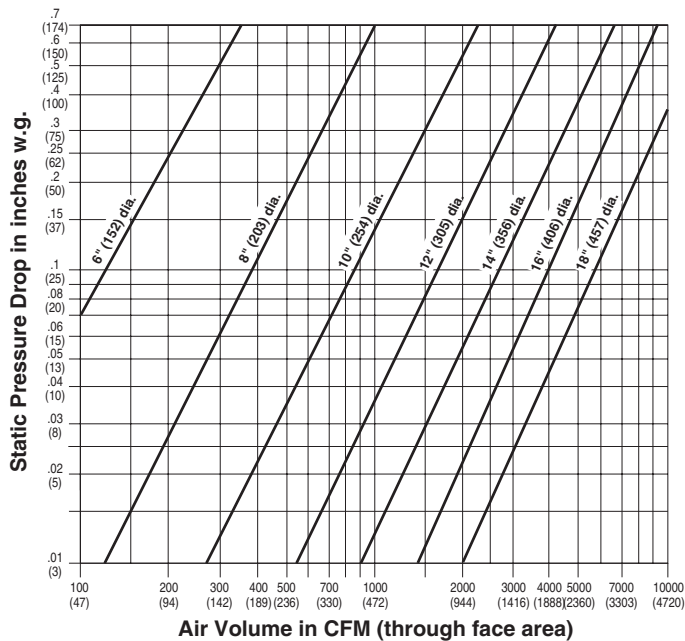

Tested per AMCA standard 500-D, Fig. 5.3.

AIR LEAKAGE (damper fully closed):

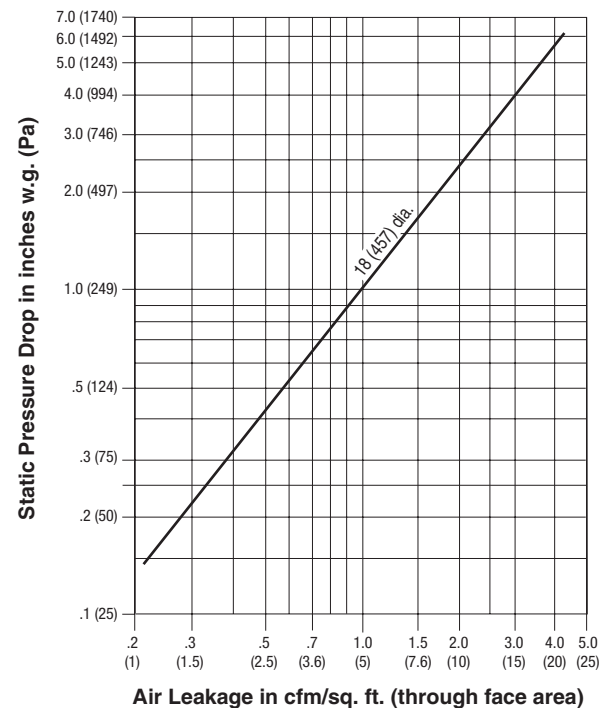

Tested per AMCA standard 500-D, Fig. 5.5.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm)

DATE

B SERIES

SUPERSEDES

DRAWING NO.

9 - 3 - 26

1000

4 - 28 - 14

1000-6

The Nailor Model 1091-UT, butterfly damper has been designed for all types of round ductwork applications and is suitable for use in the majority of low to medium pressure and velocity commercial HVAC systems. The damper may be used for two position or modulating control using a variety of electric or pneumatic actuators or may also be used as a manual balancing damper when used with the optional hand locking quadrant and positive shut-off is required.

STANDARD CONSTRUCTION:

FRAME: 16 ga. (1.6) galvanized steel. Re-inforcing tie-bars on 18" (457) dia. and above.

BLADE: 16 ga. (1.6) galvanized steel.

BEARINGS: 1/2" (13) dia. oilite bronze.

DRIVE SHAFT/AXLE: 1/2" (13) dia. plated steel. One piece continuous with two welded blade straps. Position indicator mark on drive shaft extension.

BLADE STOP: 10 ga. (3.5) full perimeter metal blade stop.

ACTUATOR MOUNTING BASE PLATE: Factory mounted bracket and baseplate supplied for field mounting of electric or pneumatic actuator.

AVAILABLE SIZES: 4" (102) through 20" (508) diameter in nominal 2" (51) increments.

TEMPERATURE RANGE: -50°F to 200°F (-45°C to +93°C)

OPTIONS:





- ☐ HLQ Hand locking quadrant with 1" (25) stand-off bracket.
- ☐ HLQ2 Hand locking quadrant with 2" (51) stand-off bracket.
- ☐ Siemens 331-4826 factory supplied and mounted pneumatic actuator. NO or NC connection. Specify _____.
- ☐ Siemens GMA161.1P factory supplied and mounted electric actuator. 24 Vac modulating (0-10 Vac) spring return. Plenum rated cable.
- ☐ Special features. Specify _____.

PERFORMANCE:

Dampers are designed to operate in a clean, dry environment.

Maximum System Pressure: 4" w.g. (1 kPa).

Maximum Face Velocity: 2000 fpm (10 m/s).

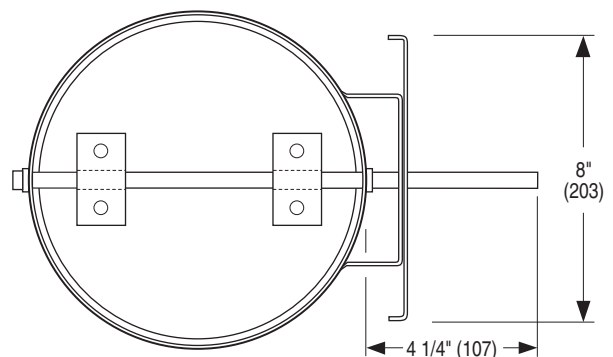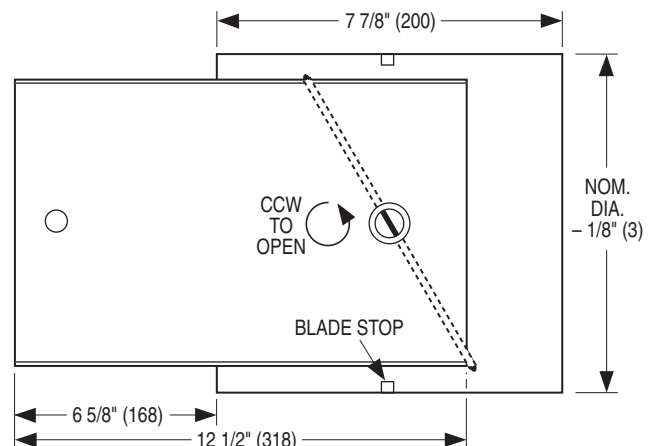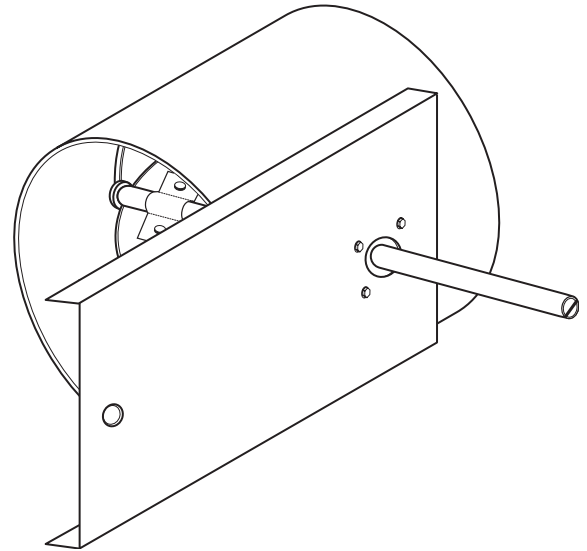**OPTIONAL
HAND LOCKING
QUADRANT**


Dimensions are in inches (mm).

SCHEDULE TYPE

PROJECT

ENGINEER

CONTRACTOR

DATE

B SERIES

SUPERSEDES

DRAWING NO.

10 - 16 - 25

1000

2 - 14 - 03

1091UT



HAND LOCKING QUADRANT FOR USE WITH MANUAL BALANCING AND AIR CONTROL DAMPERS **MODEL: CDQUAD (HLQ DAMPER ACCESSORY OPTION)**

DESCRIPTION:

The Nailor CDQUAD/HLQ Hand Locking Quadrant is primarily designed for use with the Nailor Multi-Blade 1800 Series Manual Balancing Dampers, 1000, 1100 and 2000 Series Control Dampers.

It mounts directly over a 1/2" (13) dia. lock-on drive shaft or a rigid 1/2" (13) dia. drive shaft and is secured with a carriage bolt.

The CDQUAD is provided with pre-drilled mounting holes for convenient installation and the design ensures that the mounting screws do not interfere with any damper side linkage that may be hidden inside the damper frame channel.

MATERIAL:

16 ga. (1.6) galvanized steel 1" (25) stand-off mounting bracket.

Plated steel quadrant and hardware.

Celcon® bearings.


OPTIONS:

Accessory when ordered with damper:


- ☐ HLQ2 Hand-locking Quadrant with 2" (51) stand-off bracket.

Order separately (by model number):

- ☐ CDQUAD NI CD Hand-locking Quadrant - 1/2" (13) dia. shaft.
- ☐ CDQUAD2 NI CD Hand-locking Quadrant - 1/2" (13) dia. shaft with 2" (51) stand-off bracket.
- ☐ CDQUADSS NI CD Hand-locking Quadrant - 1/2" (13) dia. shaft, Type 304 stainless steel.
- ☐ CDQUAD2SS NI CD Hand-locking Quadrant - 1/2" (13) dia. shaft with 2" (51) stand-off bracket, Type 304 stainless steel.

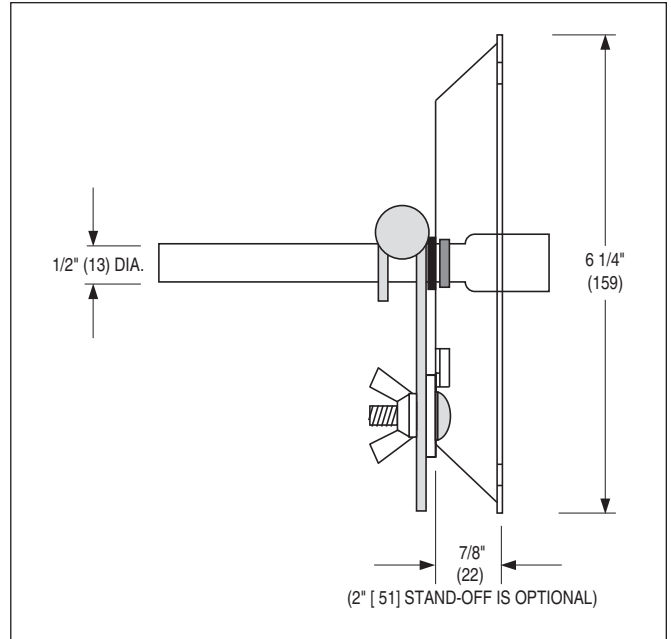

SIDE VIEW OF HAND QUADRANT

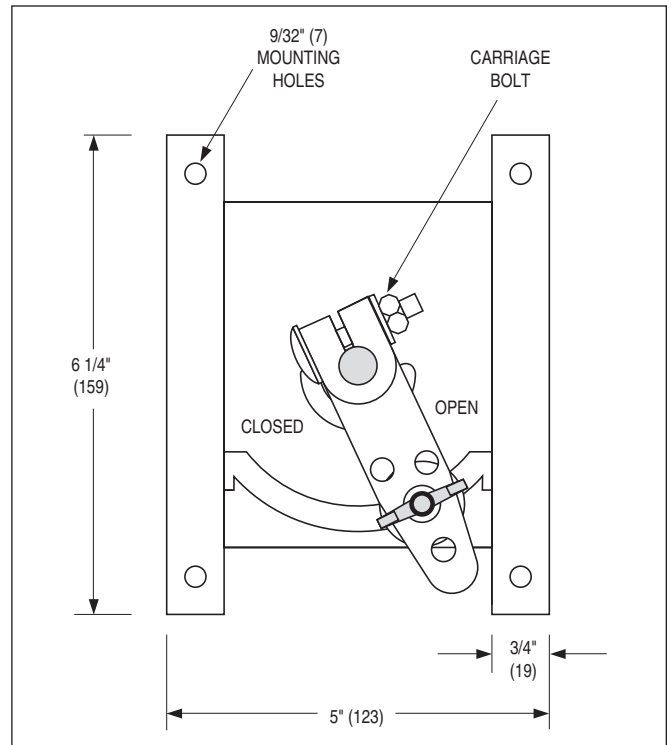

FACE VIEW OF HAND QUADRANT

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm)

DATE

B SERIES

SUPERSEDES

DRAWING NO.

12 - 1 - 23

1800

10 - 5 - 99RR

1800-QUAD

FLANGED FRAME OPTIONS:

Available as an option on Series 1000, 1100 and 2000 steel hat channel frame control dampers, the 1 1/2" (38) flanged frames allow for direct fastening to wall or unit housings as well as flanged ductwork. Damper inside dimension can be sized to match ductwork inside dimension, providing a smooth transition that produces lower pressure drop and less turbulence across the damper. Flange frames are also available with optional 9/32" (7) dia. bolt holes on 6" (152) centers for fast, convenient installation.

OPTION CODES





FF FLANGED FRONT
FFB FLANGED FRONT
 WITH BOLT HOLES

OPTION CODES


FR FLANGED REAR
FRB FLANGED REAR
 WITH BOLT HOLES

OPTION CODES

FD DOUBLE FLANGE
FDB DOUBLE FLANGE
 WITH BOLT HOLES

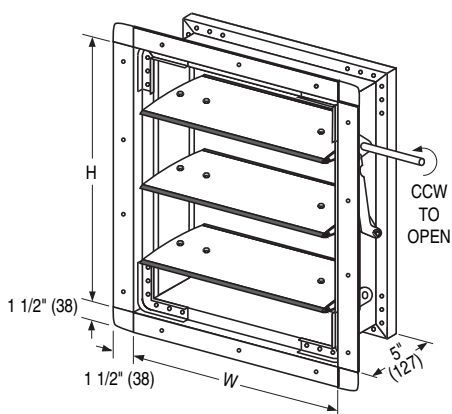


SINGLE SECTION DAMPER
 SHOWN WITH **FRB** OPTION:
 FLANGED REAR FRAME WITH 9/32" (7) DIA.
 BOLT HOLES ON 6" (152) CENTERS.

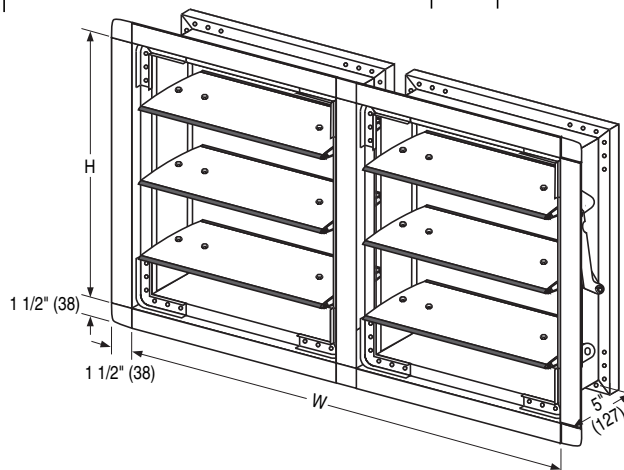


MULTIPLE SECTION DAMPER
 SHOWN WITH **FR** OPTION:
 FLANGED REAR FRAME
 (JACKSHAFT NOT SHOWN)




SMP SIDE ACTUATOR MOUNTING PLATE AND TYPE 'A' SLEEVE DETAIL CONTROL & BALANCING DAMPERS MODEL SERIES: 1000, 1100, 1800 & 2000

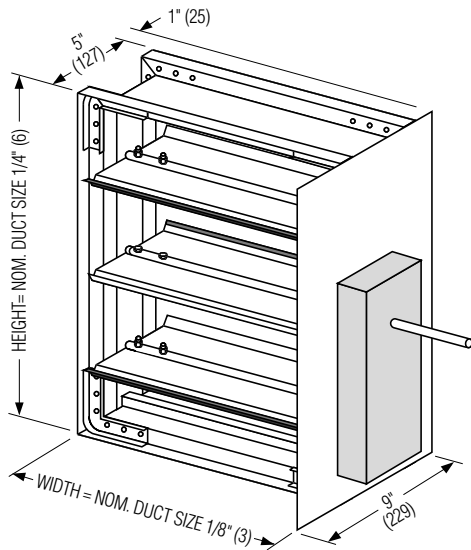


**SMP SIDE ACTUATOR MOUNTING PLATE
DIRECT DRIVE MODELS**

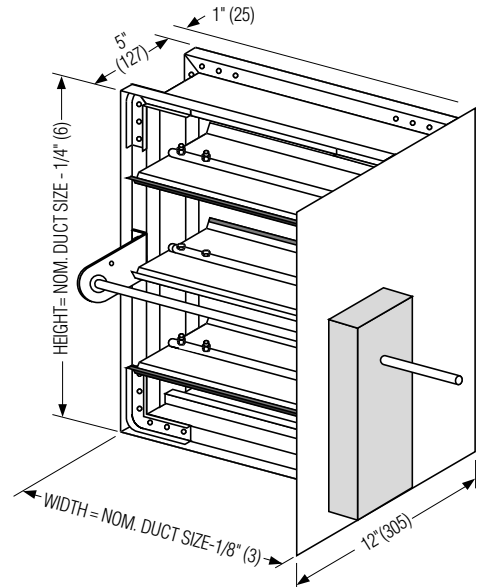

**SMP SIDE ACTUATOR MOUNTING PLATE
JACKSHAFT DRIVE MODELS**

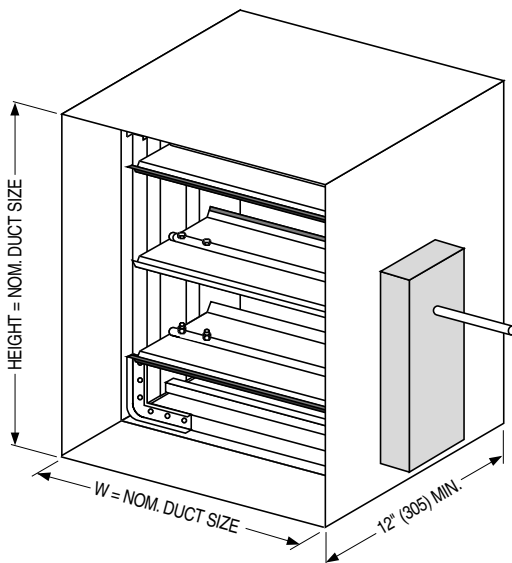

**TYPE 'A' SLEEVE
DIRECT DRIVE MODELS**

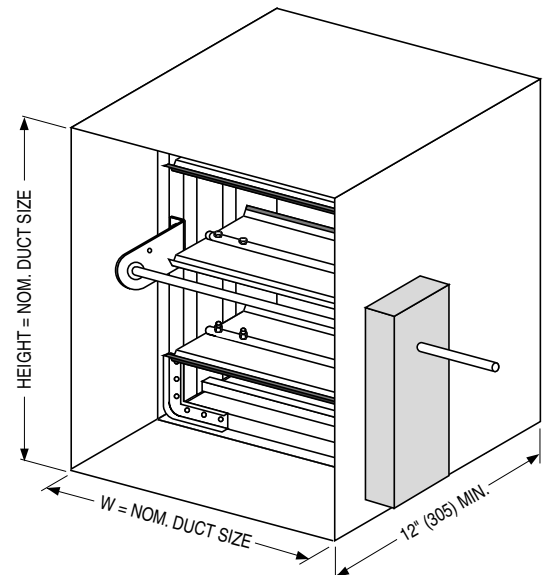

**TYPE 'A' SLEEVE
JACKSHAFT DRIVE MODELS**

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

11 - 4 - 13

1000


NEW

SMP-SL-2


PERFORMANCE DATA:

MODELS: 1010 AND 1020

PRESSURE DROP (damper fully open):

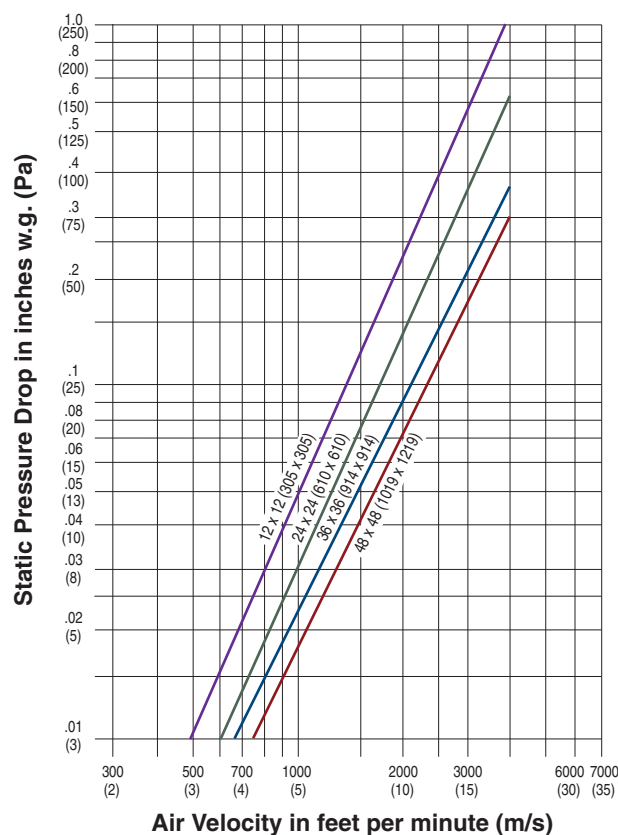

LEAKAGE (damper fully closed):

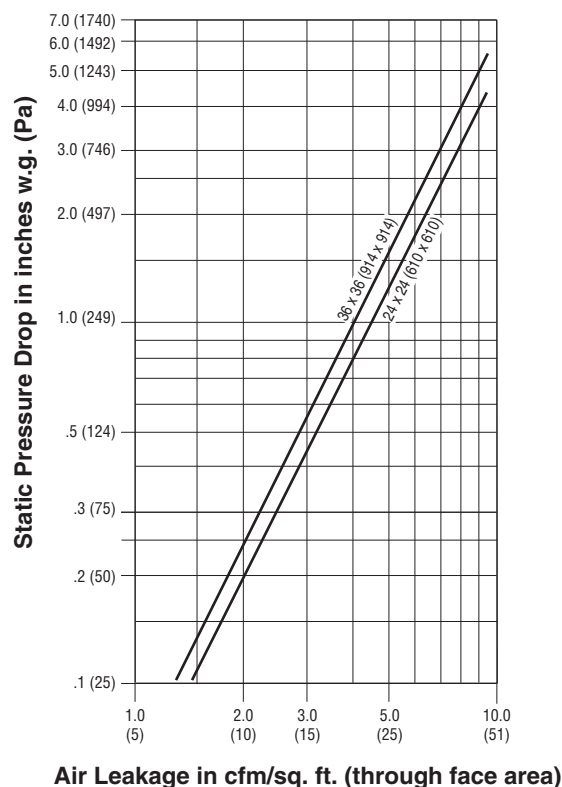

DYNAMIC LIMITATIONS/LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *	
			% of Max. Flow	Cfm/Sq. Ft.
48" (1219)	2.5" w.g.	2000 fpm	.18	3.5
36" (914)	3.0" w.g.	2000 fpm	.20	4.0
24" (610)	4.0" w.g.	2000 fpm	.23	4.5
12" (305)	5.0" w.g.	2000 fpm	.33	6.6

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.


B

CONTROL DAMPERS

PERFORMANCE DATA:


MODELS: 1012 AND 1022

PRESSURE DROP (damper fully open):

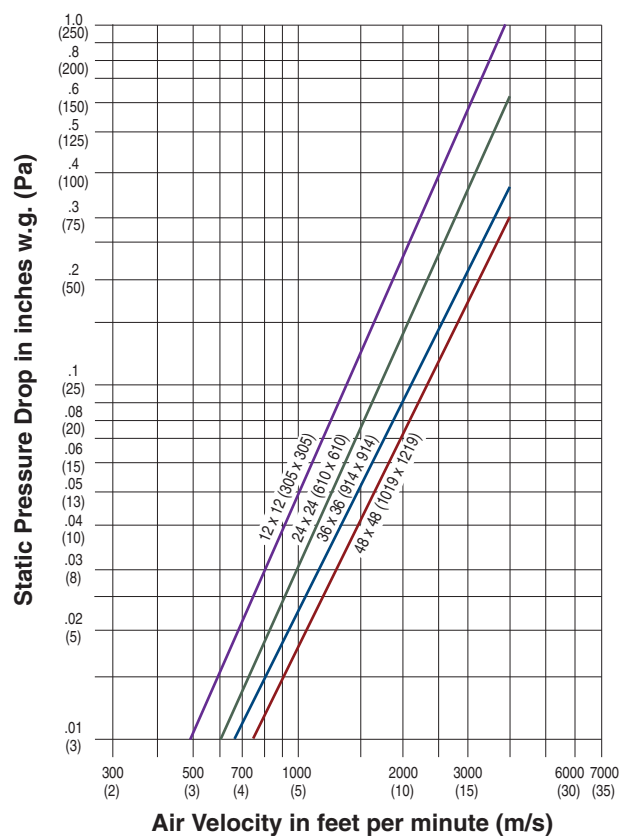

Tested per AMCA standard 500-D, Fig. 5.3.

LEAKAGE (damper fully closed w/o seals):

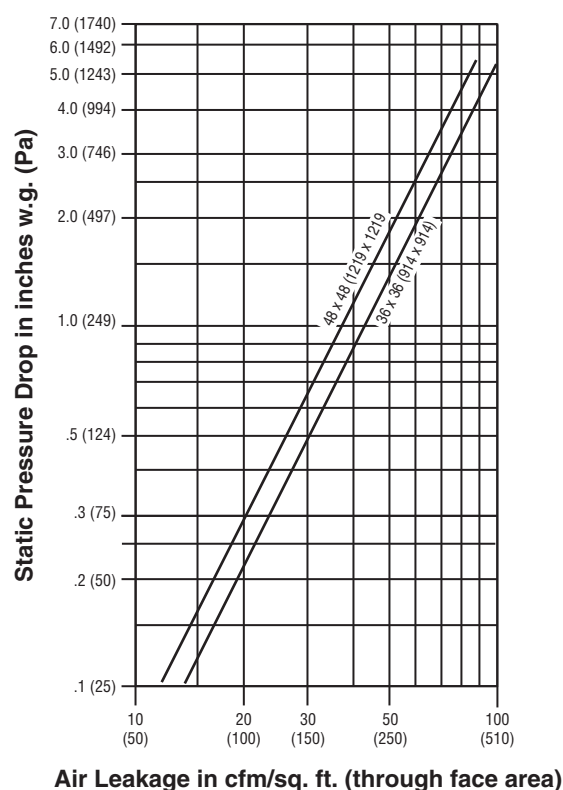

Tested per AMCA standard 500-D, Fig. 5.5.

DYNAMIC LIMITATIONS/LEAKAGE


Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage *			
			W/O Seals		W/Seals	
			% of Max. Flow	Cfm/ Sq. Ft.	% of Max. Flow	Cfm/ Sq. Ft.
48" (1219)	2.5" w.g.	2000 fpm	1.90	38	.48	9.5
36" (914)	3.0" w.g.	2000 fpm	2.15	43	.54	10.8
24" (610)	4.0" w.g.	2000 fpm	2.35	47	.57	11.3
12" (305)	5.0" w.g.	2000 fpm	3.10	62	.80	16.0

* Leakage information is based upon a pressure differential of 1" w.g. tested per AMCA standard 500-D, Fig. 5.5.

PERFORMANCE DATA:

MODEL: 1090

PRESSURE DROP (damper fully open):

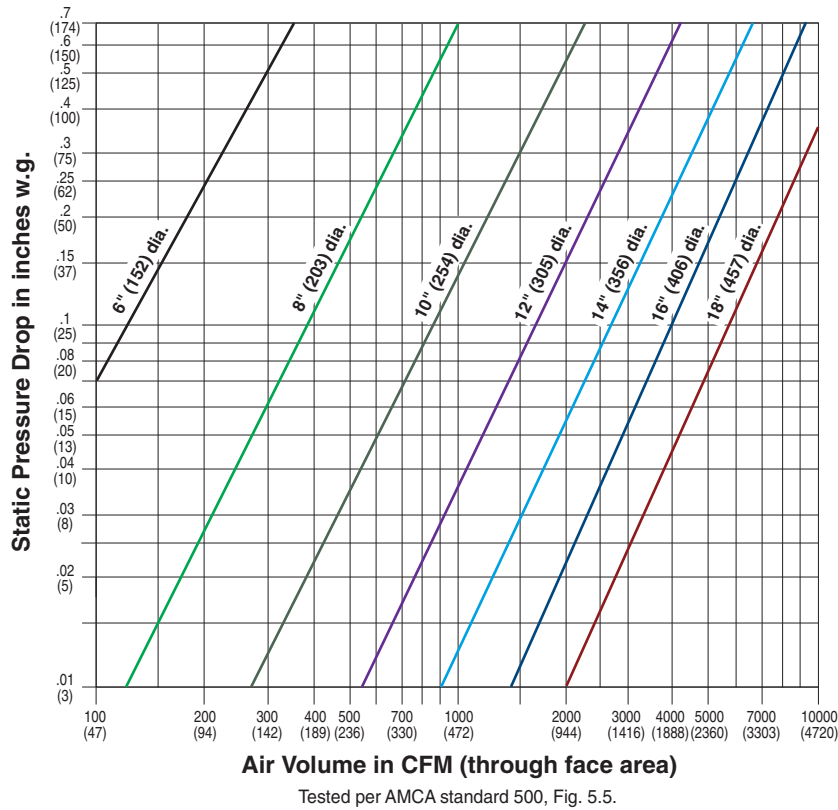


MAXIMUM SYSTEM PRESSURE

Maximum Damper Diameter	Maximum System Pressure
24" (610)	6" w.g. (1.5 kPa)
18" (457)	6" w.g. (1.5 kPa)
12" (305)	8" w.g. (2 kPa)
6" (152)	10" w.g. (2.5 kPa)

Note: Maximum Face Velocity = 4000 fpm (20 m/s).

AIR LEAKAGE (damper fully closed):

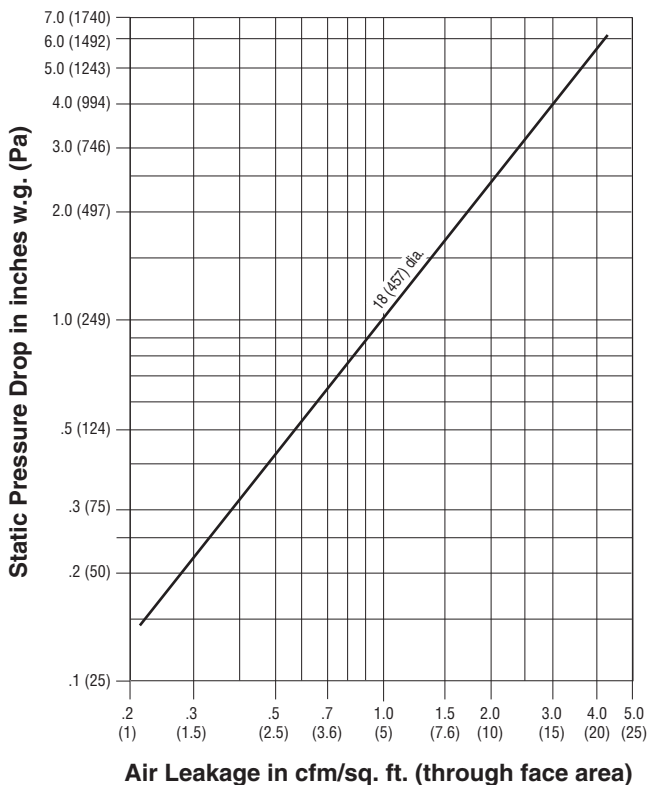

LEAKAGE: CLASS I

Less than 4 cfm/sq. ft. @ 1" w.g. (0.02 m³/s/m² @ 250 kPa).

Less than 8 cfm/sq. ft. @ 4" w.g. (0.04 m³/s/m² @ 1 kPa).