

Model 1606J, J style blade type, is an architecturally styled 6" (152) deep louver designed with smooth, clean lines that visually compliment any structure's exterior styling. Available in channel or flanged type, the 6" (152) deep frame installs easily in most common wall configurations. Suitable for use in exhaust and low to medium velocity intake applications, the blade design features a rear water baffle and provides good protection against general weather conditions, with low pressure drop characteristics and a high free area. Reinforcing bosses run the full length of each blade for superior strength. .

STANDARD CONSTRUCTION:

- FRAME:** 6" (152) deep, Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness. Integral caulking slot provided.
- BLADES:** Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness, with reinforcing bosses. J style.
- BLADE ANGLE:** Fixed at 37 degrees.
- BLADE SPACING:** Approx. 6" (152) on centers.
- BLADE SUPPORT BRACKETS:** Concealed type, factory installed on rear of louver on maximum 60" (1524) centers. Reinforced with 1 1/2" x 2" (38 x 51) angle (adds approx. 2" [51] to overall louver depth).
- MULLIONS:** Concealed architectural style allowing continuous line appearance.
- SCREEN:** 3/4" x .051 (19 x 1.3) expanded, flattened aluminum bird screen in removable frame, inside (rear) mount (adds approximately 3/8" [10] to louver depth).
- FINISH:** Mill.
- MINIMUM SIZE:** 12" W x 12" H (305 x 305).
- MAX. SINGLE SECTION SIZE:** 120" W x 84" H (3048 x 2134) or 84" W x 120" H (2134 x 3048). 70 sq. ft. (6.5m²). Larger louvers will require field assembly of smaller sections.

OPTIONS:

- | | |
|---|---|
| <input type="checkbox"/> FL Flanged Frame. | <input type="checkbox"/> ESI Extended Sill. |
| <input type="checkbox"/> BSSS Type 304 S.S. Bird Screen. | <input type="checkbox"/> FR1 1" (25) Filter Rack. |
| <input type="checkbox"/> BSN No Bird Screen. | <input type="checkbox"/> FR2 2" (51) Filter Rack. |
| <input type="checkbox"/> ISA Aluminum Insect Screen. | <input type="checkbox"/> PAC Perimeter Anchor Clips. |
| <input type="checkbox"/> ISSS Type 304 S.S. Insect Screen. | <input type="checkbox"/> Other: _____ . |
| <input type="checkbox"/> WE Welded Construction. | |

OPTIONAL FINISHES:

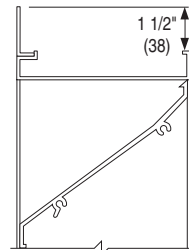
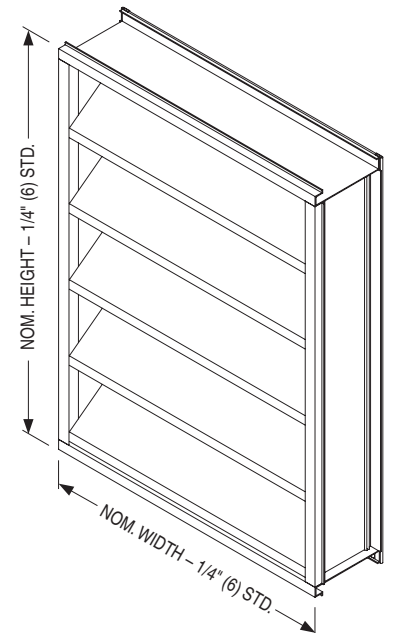
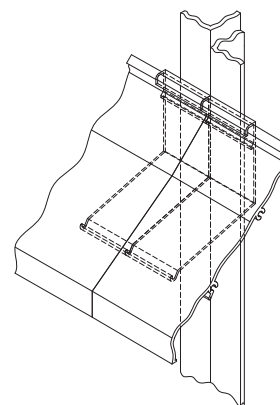
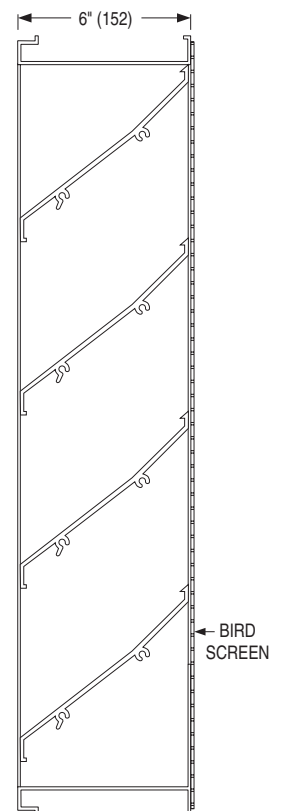
- PC3** Powder Coat AAMA 2603. Color: _____ .
- PC4** High Performance Powder Coat AAMA 2604 (Equivalent to 50% Kynar[®]). Color: _____ .
- PC5** Fluoropolymer Powder Coat AAMA 2605 (Equivalent to 70% Kynar[®]). Color: _____ .
- PCC** Prime Coat.
- AN04** Clear Anodized 204-R1.
- AN15** Clear Anodized 215-R1.

Color Anodized:

- | | |
|--|---|
| <input type="checkbox"/> ANLB Light Bronze. | <input type="checkbox"/> ANMB Medium Bronze. |
| <input type="checkbox"/> ANDB Dark Bronze. | <input type="checkbox"/> ANBK Black. |

OPTIONAL W x H SIZING (1/4" [6.5] Undersize standard):

- U00** Exact Size.
- U38** Undersize 3/8" (9.5).
- U50** Undersize 1/2" (12.7).


FLANGED FRAME (FL)
(OPTIONAL)

ARCHITECTURAL STYLE
CONCEALED MULLION DETAIL

← **BIRD**
SCREEN
SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 1 of 2
Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 17 - 22	1600	7 - 11 - 13	1606J



EXTRUDED ALUMINUM STATIONARY LOUVER
6" (152) DEEP • J BLADE • ARCHITECTURAL
PERFORMANCE DATA
MODEL: 1606J

FREE AREA in Square Feet and Square Meters

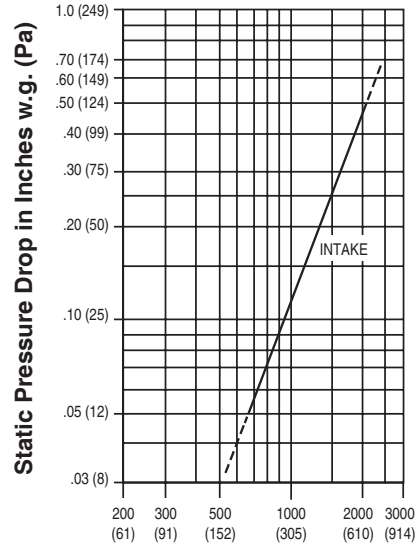
		Width in Inches and Meters																		
		12 0.30	18 0.46	24 0.61	30 0.76	36 0.91	42 1.07	48 1.22	54 1.37	60 1.52	66 1.68	72 1.83	78 1.98	84 2.13	90 2.29	96 2.44	102 2.59	108 2.74	114 2.90	120 3.05
Height in Inches and Meters	12 0.30	0.21 0.02	0.33 0.03	0.45 0.04	0.57 0.05	0.69 0.06	0.81 0.08	0.93 0.09	1.05 0.10	1.17 0.11	1.29 0.12	1.41 0.13	1.53 0.14	1.65 0.15	1.77 0.16	1.89 0.18	2.02 0.19	2.14 0.20	2.26 0.21	2.38 0.22
	18 0.46	0.48 0.04	0.75 0.07	1.03 0.10	1.31 0.12	1.59 0.15	1.87 0.17	2.14 0.20	2.42 0.23	2.70 0.25	2.98 0.28	3.26 0.30	3.54 0.33	3.81 0.35	4.09 0.38	4.37 0.41	4.65 0.43	4.93 0.46	5.21 0.48	5.48 0.51
	24 0.61	0.75 0.07	1.18 0.11	1.62 0.15	2.06 0.19	2.50 0.23	2.94 0.27	3.37 0.31	3.81 0.35	4.25 0.39	4.69 0.44	5.12 0.48	5.56 0.52	6.00 0.56	6.44 0.60	6.87 0.64	7.31 0.68	7.75 0.72	8.19 0.76	8.62 0.80
	30 0.76	1.02 0.09	1.62 0.15	2.21 0.21	2.81 0.26	3.41 0.32	4.01 0.37	4.60 0.43	5.20 0.48	5.80 0.54	6.40 0.59	6.99 0.65	7.59 0.71	8.19 0.76	8.78 0.82	9.38 0.87	9.98 0.93	10.58 0.98	11.17 1.04	11.77 1.09
	36 0.91	1.29 0.12	2.05 0.19	2.81 0.26	3.56 0.33	4.32 0.40	5.08 0.47	5.84 0.54	6.59 0.61	7.35 0.68	8.11 0.75	8.86 0.82	9.62 0.89	10.38 0.96	11.14 1.03	11.89 1.10	12.65 1.18	13.41 1.25	14.16 1.32	14.92 1.39
	42 1.07	1.52 0.14	2.40 0.22	3.29 0.31	4.18 0.39	5.07 0.47	5.96 0.55	6.84 0.64	7.73 0.72	8.62 0.80	9.51 0.88	10.40 0.97	11.28 1.05	12.17 1.13	13.06 1.21	13.95 1.30	14.84 1.38	15.72 1.46	16.61 1.54	17.50 1.63
	48 1.22	1.79 0.17	2.84 0.26	3.88 0.36	4.93 0.46	5.98 0.56	7.04 0.65	8.13 0.76	9.12 0.85	10.17 0.94	11.22 1.04	12.27 1.14	13.31 1.24	14.36 1.33	15.41 1.43	16.46 1.53	17.50 1.63	18.55 1.72	19.60 1.82	20.65 1.92
	54 1.37	2.06 0.19	3.27 0.30	4.48 0.42	5.68 0.53	6.89 0.64	8.10 0.75	9.31 0.86	10.51 0.98	11.72 1.09	12.93 1.20	14.14 1.31	15.34 1.43	16.55 1.54	17.76 1.65	18.97 1.76	20.17 1.87	21.38 1.99	22.59 2.10	23.80 2.21
	60 1.52	2.34 0.22	3.70 0.34	5.07 0.47	6.44 0.60	7.80 0.73	9.17 0.85	10.54 0.98	11.91 1.11	13.27 1.23	14.64 1.36	16.01 1.49	17.38 1.61	18.74 1.74	20.11 1.87	21.48 2.00	22.84 2.12	24.21 2.25	25.58 2.38	26.95 2.50
	66 1.68	2.61 0.24	4.14 0.38	5.66 0.53	7.19 0.67	8.72 0.81	10.24 0.95	11.77 1.09	13.30 1.24	14.83 1.38	16.35 1.52	17.88 1.66	19.41 1.80	20.93 1.94	22.46 2.09	23.99 2.23	25.52 2.37	27.04 2.51	28.57 2.65	30.10 2.80
	72 1.83	2.88 0.27	4.57 0.42	6.26 0.58	7.94 0.74	9.63 0.89	11.32 1.05	13.00 1.21	14.69 1.36	16.38 1.52	18.07 1.68	19.75 1.84	21.44 1.99	23.13 2.15	24.81 2.31	26.50 2.46	28.19 2.62	29.87 2.78	31.56 2.93	33.25 3.09
	78 1.98	3.16 0.29	5.00 0.46	6.85 0.64	8.70 0.81	10.54 0.98	12.39 1.15	14.24 1.32	16.08 1.49	17.93 1.67	19.78 1.84	21.63 2.01	23.47 2.18	25.32 2.35	27.17 2.52	29.01 2.70	30.86 2.87	32.71 3.04	34.55 3.21	36.40 3.38
	84 2.13	3.43 0.32	5.44 0.50	7.44 0.69	9.45 0.88	11.46 1.06	13.46 1.25	15.47 1.44	17.48 1.62	19.48 1.81	21.49 2.00	23.50 2.18	25.51 2.37	27.51 2.56	29.52 2.74	31.53 2.93	33.53 3.12	35.54 3.30	37.55 3.49	39.55 3.67
	90 2.29	3.70 0.34	5.87 0.55	8.04 0.75	10.20 0.95	12.37 1.15	14.54 1.35	16.70 1.55	18.87 1.75	21.04 1.95	23.21 2.16	25.37 2.36	27.54 2.56	29.71 2.76	31.87 2.96	34.04 3.16	36.21 3.36	38.37 3.57	40.54 3.77	42.71 3.97
	96 2.44	3.98 0.37	6.30 0.59	8.63 0.80	10.96 1.02	13.28 1.23	15.61 1.45	17.94 1.67	20.26 1.88	22.59 2.10	24.92 2.32	27.25 2.53	29.57 2.75	31.90 2.96	34.23 3.18	36.55 3.40	38.88 3.61	41.21 3.83	43.53 4.04	45.86 4.26

AIRFLOW/WATER PENETRATION DATA
for 48" x 48" (1219 x 1219) Louver Size

Free Area %	51%
Free Area sq. ft. (sq. m.)	8.13 (0.76)
Free Area Velocity at Point of Beginning Water Penetration at .01 oz./sq. ft. (3 ml/sq. m) (15 min. test duration)	1029 fpm (314 m/min.)
Air Volume at 1029 fpm Free Area Velocity	8366 cfm (3948 l/s)
Pressure Drop @ 1029 fpm	.13 in. w.g. (32 Pa)

NOTE: To minimize water penetration when sizing intake louvers, select a Free Area Velocity that is **below** the point of beginning water penetration.

PRESSURE DROP



Air Velocity in Feet (Meters) Per Minute Through Free Area
 Louver test size: 48" x 48" (1219 x 1219 mm). Standard air density @ 0.075 lbs/ft³.
 Tested to AMCA Fig. 5.5 – 6.5.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

B SERIES

SUPERSEDES

DRAWING NO.

2 - 17 - 22

1600

7 - 11 - 13

1606J