



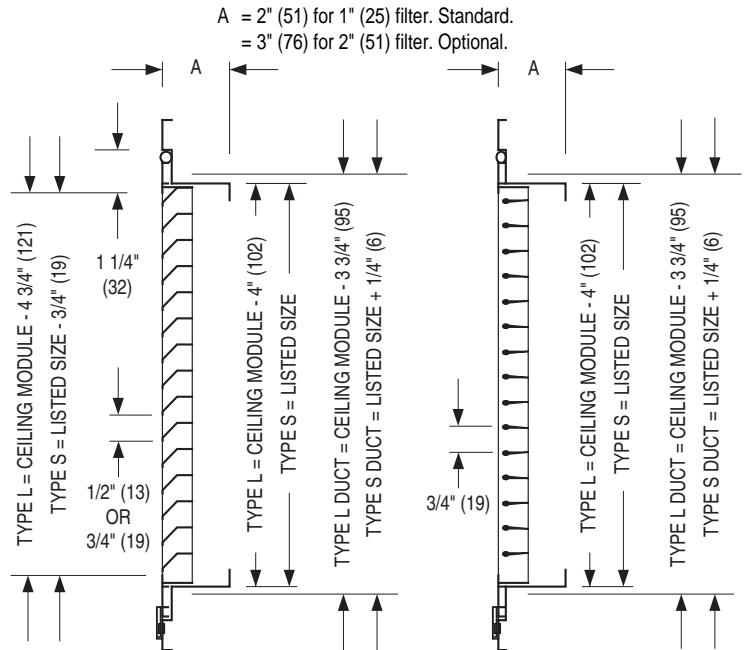

STEEL FILTER RETURN GRILLES
FIXED LOUVERED BLADES
MODELS: 61FB45, 61FB55 AND 61FBS
TYPE S OR L

TYPE S = LISTED SIZE + 3 3/4" (95)
 TYPE L = CEILING MODULE - 1/4" (6)

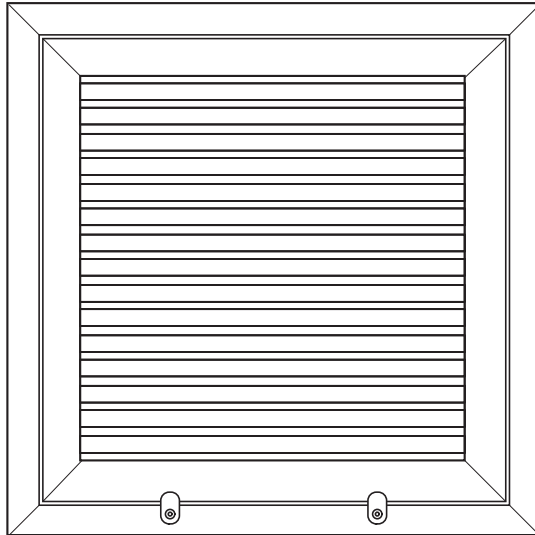

MODELS:
61FB45, 61FB55

MODEL:
61FBS

MODELS:

- 61FB45** 45° deflection, 3/4" (19) spacing
- 61FB55** 45° deflection, 1/2" (13) spacing
- 61FBS** 0° deflection, 3/4" (19) spacing

FRAME/BORDER:

- Type S** Surface Mount
- Type L** Lay-in T-Bar

DESCRIPTION:

1. Material: Corrosion-resistant steel.
2. Provision for 1" (25) filter (by others) is standard.
3. Type S available in nominal sizes 6" x 4" (152 x 102) through 36" x 24" (914 x 610) maximum in 1" (25) increments. Type L is available in ceiling module sizes: 12" x 12", 24" x 12", 24" x 24", 36" x 12", 36" x 24" and 48" x 24" (305 x 305, 610 x 305, 610 x 610, 914 x 305, 914 x 610 and 1219 x 610). Metric available.
4. Blades are parallel to width (first dimension).
5. Core is hinged and secured by 1/4 turn latches. Core panel is hinged on width dimension at top as standard (HT).

For other hinging requirements, specify one of the following:

- HB** Hinged Bottom
- HL** Hinged Left (facing grille)
- HR** Hinged Right (facing grille)

6. Type N standard fastening is with sheet metal screws, (by others), through the neck of the outer frame for Type S Surface Mount installation.
7. Standard Finish: AW Appliance White.

OPTIONS:

1. Finish:
 - SP** Special _____ .
2. **F2** Provision for 2" (51) filter (by others).
3. Core Fastening:
 - KK** Knurled knob
 - QT** 1/4 turn slotted fastener
4. Installation Fastening:
 - Type A** Countersunk screwholes on face of outer frame (Type S Model).

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 1 - 11	61F	61FB-1/8-8-03	61F-1