




**SINGLE DUCT TERMINAL UNIT WITH
HOT WATER REHEAT
DIGITAL CONTROLS • PRESSURE INDEPENDENT
CONSTANT OR VARIABLE VOLUME
MODEL: D30RW**

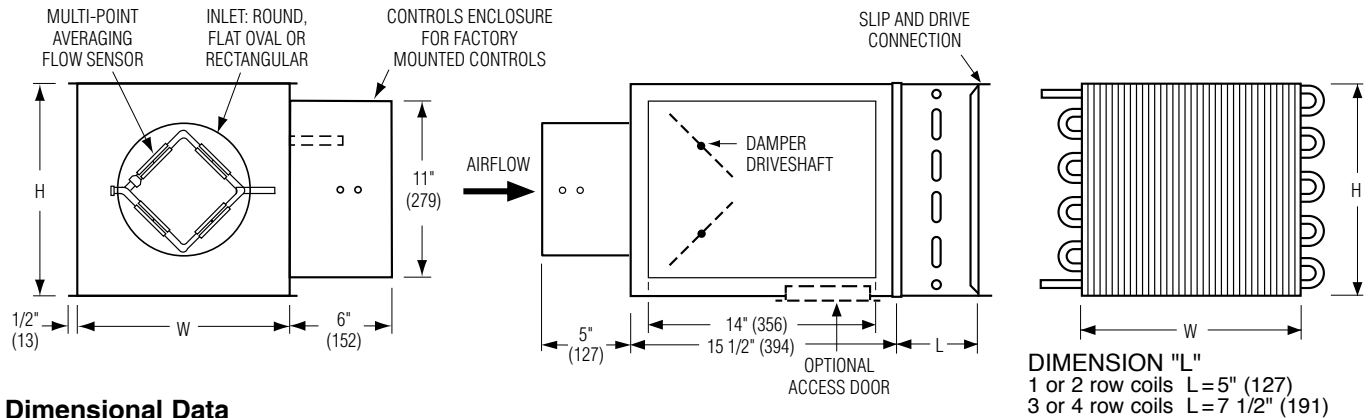

Dimensional Data

Unit Size	Airflow Range* cfm (l/s)	W	H	Inlet Size	Coil Connections			
					1 Row	2 Row	3 Row	4 Row
4	0 - 225 (0 - 106)	10 (254)	10 (254)	3 7/8 (98) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
5	0 - 400 (0 - 189)	10 (254)	10 (254)	4 7/8 (124) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
6	0 - 550 (0 - 260)	10 (254)	10 (254)	5 7/8 (149) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
7	0 - 800 (0 - 378)	12 (305)	12 1/2 (318)	6 7/8 (175) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
8	0 - 1100 (0 - 519)	12 (305)	12 1/2 (318)	7 7/8 (200) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
9	0 - 1400 (0 - 661)	14 (356)	12 1/2 (318)	8 7/8 (225) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
10	0 - 1840 (0 - 868)	14 (356)	12 1/2 (318)	9 7/8 (251) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
12	0 - 2500 (0 - 1180)	18 (457)	12 1/2 (318)	12 15/16 x 9 13/16 (329 x 249) Oval	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
14	0 - 3125 (0 - 1475)	24 (610)	12 1/2 (318)	16 1/16 x 9 13/16 (408 x 249) Oval	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
16	0 - 3725 (0 - 1758)	28 (711)	12 1/2 (318)	19 3/16 x 9 13/16 (487 x 249) Oval	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)
24 x 16	0 - 8330 (0 - 3931)	38 (965)	18 (457)	23 7/8 x 15 7/8 (606 x 403) Rect.	7/8 (22)	7/8 (22)	1 3/8 (35)	1 3/8 (35)

* Maximum airflow limit is based upon 1.5" w.g. (373 Pa) max. differential pressure signal from Flow Sensor.

Standard Features:

- 22 ga. (0.86) zinc coated steel casing, mechanically sealed, low leakage construction.
- 16 ga. (1.61) corrosion-resistant steel inclined opposed blade damper with extruded PVC seals (single blade on size 4, 5, 6). 45° rotation, CW to close. Tight close-off. Damper leakage is less than 2% of the terminal rated airflow at 3" w.g. (750 Pa).
- 1/2" (13) dia. plated steel drive shaft. An indicator mark on the end of the shaft shows damper position.
- Multi-point averaging Flow Sensor. Supplied with balancing tees.
- Rectangular discharge with slip and drive cleat duct connection.
- Full NEMA 1 type controls enclosure for factory mounted controls.
- 3/4" (19), dual density insulation, exposed edges coated to prevent air erosion. Meets the requirements of NFPA 90A and UL 181.

- Right-hand controls location is standard (shown) when looking in direction of airflow. Optional left hand controls mounting is available.
- Model D30RW can be installed horizontally, vertical or at any angle. Operation is not affected by position.

Hot Water Coil Section:

- 1/2" (13) Copper tubes and aluminum ripple fins, 10 per inch.
- 1, 2, 3 or 4 row.
- Left or right hand connection. Determined by looking in direction of airflow (RH illustrated).
- 1/2" (13), 7/8" (22) or 1 3/8" (35) O.D. male solder sweat connections.

Digital Controls:

- Factory mounted (supplied by others)
- Field mounted (supplied by others)
- Nailor EZvav
- See separate submittal.



Options and Accessories:

- Steri-liner.
- Fiber-free liner.
- Steri-liner + Perforated metal liner.
- Perforated metal liner.
- Solid metal liner.
- 1" (25) liner.
- FMI Removable insert type Flow Sensor.
- 20 ga. (1.00) construction.
- Bottom access door.
- 24 VAC Control transformer.
- Toggle disconnect switch.
- Hanger brackets.
- Controls enclosure for field mounted controls.
- Dust tight enclosure seal.
- Ultra low leakage casing.
- Seismic Certification:
 - Seismic Source International (Standard)
 - HCAI (formerly OSHPD, California)
 - Special Features: _____



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

B SERIES

SUPERSEDES

DRAWING NO.

11 - 2 - 22


3000

3 - 13 - 18


D30RW-1

Integral Sound Attenuator plus Hot Water Coil

- Single continuous length terminal construction minimizes casing leakage.
- Continuous internal insulation reduces insulation seams and minimizes airflow disturbance.
- Supplied with same liner as basic unit.

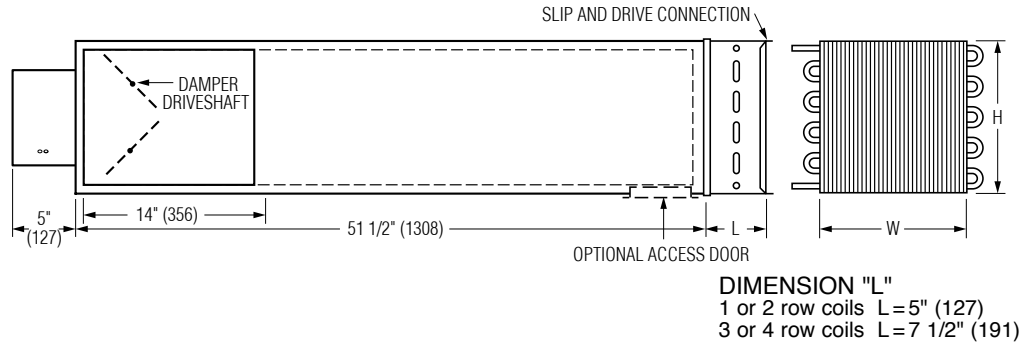


AT Discharge Sound Attenuator (loose)

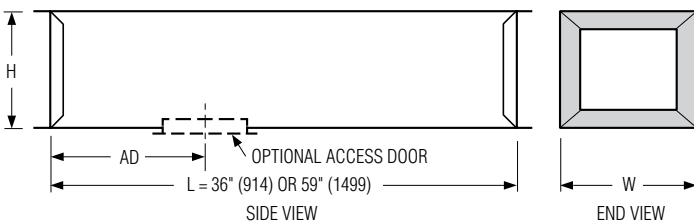

- 22 ga. (0.86) galvanized steel construction.
 - Shipped loose for field attachment.
 - Slip and drive connection.
 - 3/4" (14) dual density fiberglass insulation, exposed edges coated to prevent erosion as standard.
- AT303 3' (916) Long - Standard.**
 - AT305 5' (1524) Long - Optional.**
 - Special Features:** _____


FF Round Discharge Collar

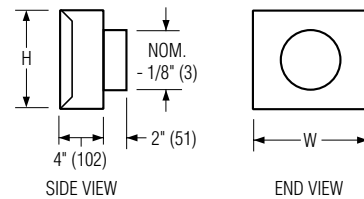

Dimensional Data

Unit Size	W	H	AD	FF Nominal Outlet Size
4, 5, 6	10 (254)	10 (254)	12 (305)	4, 5, 6 (102, 127, 152)
7, 8	12 (305)	12 1/2 (318)	12 (305)	7, 8 (178, 203)
9, 10	14 (356)	12 1/2 (318)	12 (305)	9, 10 (229, 254)
12	18 (457)	12 1/2 (318)	12 (305)	12 (305)
14	24 (610)	12 1/2 (318)	12 (305)	14 (356)
16	28 (711)	12 1/2 (318)	12 (305)	16 (406)
24 x 16	38 (965)	18 (457)	12 (305)	-

FTL Low Temperature Construction

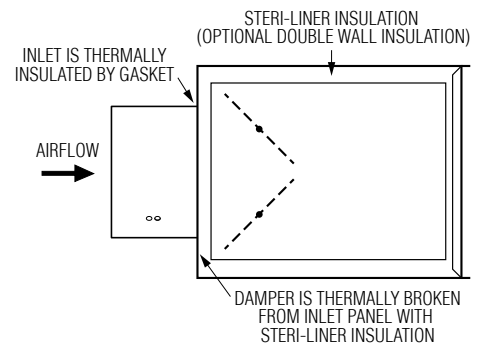

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 2.
 Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
11 - 2 - 22	3000	3 - 13 - 18	D30RW-1