




Nailor[®]
Industries Inc.

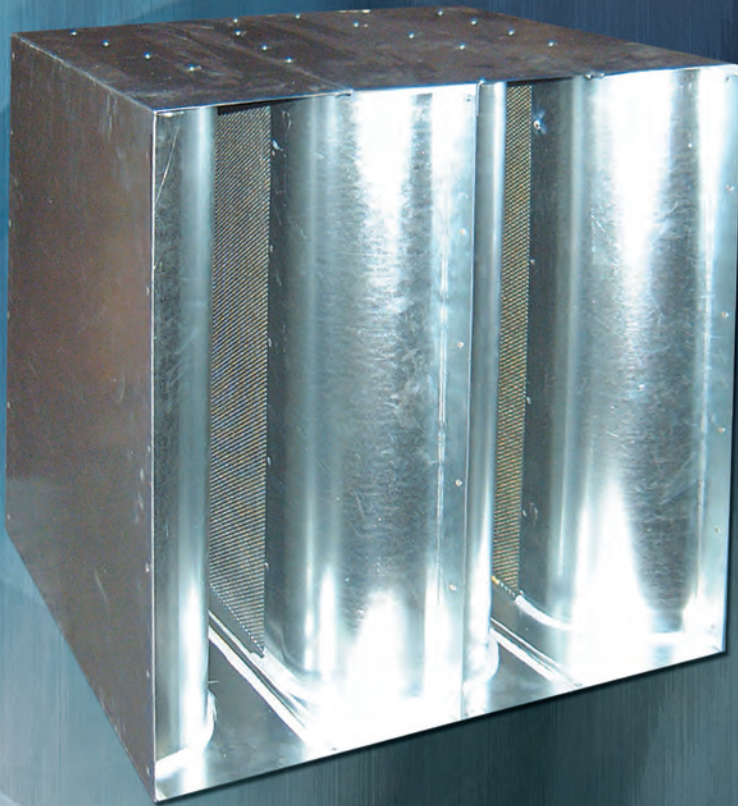

SILENCERS

For the most up to date catalog information go to

nailor.com

TABLE OF CONTENTS

	Page No.
Features, Description, Sizes and Options	
Rectangular Dissipative Silencers	1
RBB-LP • Rectangular Broad Band - Low Pressure Insertion Loss	
RBB-MP • Rectangular Broad Band - Medium Pressure Insertion Loss	
RBB-HP • Rectangular Broad Band - High Pressure Insertion Loss	
Performance Data	
Rectangular Dissipative Silencers	
RBB-LP • Rectangular Broad Band - Low Pressure Insertion Loss	2
RBB-MP • Rectangular Broad Band - Medium Pressure Insertion Loss	3
RBB-HP • Rectangular Broad Band - High Pressure Insertion Loss	4
Submittal Data Request Sheet	
Rectangular Dissipative Silencers	
RBB-LP, MP and HP • Rectangular Broad Band	5

RECTANGULAR DISSIPATIVE SILENCER

RBB SERIES

Models:

RBB-LP Low Pressure

RBB-MP Medium Pressure

RBB-HP High Pressure



Rectangular Dissipative Silencer

Features and Benefits:

Nailor rectangular dissipative silencers are designed to offer superior acoustic and aerodynamic performance. Rectangular models utilize acoustical splitters, sometimes called baffles, for broad-band attenuation. Perforated metal protects the glass fiber from erosion by the airflow. Similarly circular models have acoustical center-bodies, sometimes referred to as pods. They also incorporate glass fiber external to the duct connection size.

Splitters in rectangular models vary in quantity and thickness, and air passages also vary in size. The splitters and center bodies are aerodynamically shaped to minimize pressure drop.

The latest in control components and options provide maximum flexibility with a wide scope for cost effective innovation.

Description:

- Nailor rectangular dissipative silencers are designed to offer superior acoustic and aerodynamic performance.
- All performance data is independently tested using a 24" x 24" (610 x 610) rectangular sample.
- Nailor designs and manufactures silencers for virtually any application, as well as custom designs to meet any special need.
- Applications include return, supply, and exhaust ductwork, in addition to, fan plenums and air handling units.
- Constructed with a standard outer casing of 22 gauge (0.85) galvanized steel, all external seams are lock formed and sealed to withstand up to 10" w.g. (2.5 kPa) pressure differential.
- Each internal "pod" includes a solid 22 gauge (0.85) elliptical nose piece, transparent perforated metal, and is exceptionally tapered to minimize dynamic pressure loss and maximize static pressure regain.
- The inorganic, odorless, vermin and moisture proof, absorption media is compressed a minimum of 5% to eliminate voids and prevent settling.
- The incombustible filler material does not exceed the fire hazard classifications in accordance with NFPA 90A and UL 181.
- Silencer models include: Rectangular Broadband – Low Pressure, Medium Pressure, and High Pressure.

Sizes:

- Rectangular Dissipative Silencer lengths available in 36" (914), 60" (1524) and 84" (2134).

Standard Features:

- Constructed with a standard outer casing of 22 gauge (0.85 mm) galvanized steel.
- All external seams are lock formed and sealed to withstand up to 10" w.g. (2.5 kPa) pressure differential.
- Each internal "pod" includes a solid 22 gauge (0.85) elliptical nose piece, transparent perforated metal, and is exceptionally tapered to minimize dynamic pressure loss and maximize static pressure regain.
- Baffles are filled with inorganic, odorless, vermin, and moisture proof, absorption media is compressed a minimum of 5% to eliminate voids and prevent settling.
- Galvanized aerodynamically shaped nose at inlet.
- Centerbody pods are centered in air stream and supported by steel brackets
- Perforated galvanized baffles are complete with perforated diffuser tail.

Options:

- High temperature sealant.
- Field or Factory assembled multiple modules.
- TDF Flange one or both ends.
- 2" (51) flange one or both ends.
- 18 gauge (1.31 mm) outer casing construction.

Performance Data • Insertion Loss Octave Band (Hz)

Model: RBB-LP • Rectangular Broad Band - Low Pressure Insertion Loss

Length	Face Velocity	Static Pressure Drop	Octave Band (Hz)							
			63	125	250	500	1000	2000	4000	8000
36	-2000	0.20	1	5	10	18	25	19	13	9
	-1000	0.07	1	5	9	19	25	19	13	10
	0	0	2	4	9	18	25	19	14	10
	+2000	0.19	2	4	8	16	24	19	15	10
	+2500	0.30	1	4	8	16	24	19	15	10
60	-2000	0.30	1	9	15	31	41	30	17	8
	-1000	0.10	2	9	14	31	42	31	17	9
	0	0	2	7	13	30	45	33	19	12
	+2000	0.27	2	6	12	27	42	34	21	12
	+2500	0.42	1	6	12	26	41	33	20	12
84	-2000	0.40	4	13	23	40	44	38	21	11
	-1000	0.12	4	11	20	42	47	40	23	11
	0	0	4	10	19	41	49	42	26	15
	+1000	0.10	3	9	18	40	49	42	27	15
	+2000	0.38	3	9	17	39	47	40	27	16

Self Generated Noise

Face Velocity (fpm)	Octave Band (Hz)							
	63	125	250	500	1000	2000	4000	8000
-2000	66	61	57	61	63	67	59	52
-1000	55	51	48	52	56	49	42	32
+1000	58	49	40	39	34	27	24	22
+2000	62	59	52	50	51	54	53	48

Face Area Correction Factors

Area	0.5	1	2	4	8	16	32	64	128	256
PWL (dB)	-8	-6	-3	0	3	6	9	12	15	18

Performance Data • Insertion Loss Octave Band (Hz)

Model: RBB-MP • Rectangular Broad Band - Medium Pressure Insertion Loss

Length	Face Velocity	Static Pressure Drop	Octave Band (Hz)							
			63	125	250	500	1000	2000	4000	8000
36	-1500	0.18	2	6	12	21	29	23	13	7
	-1000	0.09	2	6	11	21	29	23	13	7
	0	0	2	5	10	21	28	23	16	10
	+1000	0.07	2	4	10	20	28	23	16	10
	+2000	0.28	1	4	9	18	27	23	15	10
60	-1500	0.26	3	10	17	35	45	36	20	11
	-1000	0.12	4	9	16	35	46	38	22	11
	0	0	5	9	16	35	47	41	25	14
	+1000	0.10	5	8	15	34	47	41	26	14
	+2000	0.41	4	7	15	33	46	39	26	14
84	-1500	0.30	8	12	24	40	46	40	26	15
	-1000	0.15	8	12	23	42	47	41	27	15
	0	0	6	11	21	43	49	45	29	16
	+1000	0.13	7	10	20	42	49	46	29	16
	+1500	0.28	6	9	19	41	46	44	30	17

Self Generated Noise

Face Velocity (fpm)	Octave Band (Hz)							
	63	125	250	500	1000	2000	4000	8000
-1500	61	55	54	58	60	62	56	48
-1000	54	50	49	52	55	55	47	37
+1000	54	50	42	42	39	36	34	29
+2000	60	59	59	52	52	55	56	52

Face Area Correction Factors

Area	0.5	1	2	4	8	16	32	64	128	256
PWL (dB)	-8	-6	-3	0	+3	+6	+9	+12	+15	+18

Performance Data • Insertion Loss Octave Band (Hz)

Model: RBB-HP • Rectangular Broad Band - High Pressure Insertion Loss

Length	Face Velocity	Static Pressure Drop	Octave Band (Hz)							
			63	125	250	500	1000	2000	4000	8000
36	-1500	0.50	3	9	16	26	30	27	18	11
	-1000	0.23	3	8	15	26	31	28	19	12
	0	0	3	6	14	27	36	31	21	13
	+1000	0.21	3	6	13	25	35	31	21	13
	+2000	0.83	2	6	12	23	32	30	19	11
60	-1000	0.39	9	14	22	40	44	45	31	15
	-500	0.11	10	13	21	42	46	48	33	17
	0	0	8	12	21	42	49	50	35	20
	+1000	0.37	8	11	19	40	48	50	36	20
	+1500	0.84	6	10	18	39	47	49	35	19
84	-1000	0.40	9	18	31	39	43	45	33	19
	-500	0.21	10	17	30	42	46	48	37	22
	0	0	10	16	26	45	49	51	38	23
	+1000	0.38	9	14	25	44	47	48	37	22
	+1500	0.86	7	14	25	44	45	46	35	20

Self Generated Noise

Face Velocity (fpm)	Octave Band (Hz)							
	63	125	250	500	1000	2000	4000	8000
-1500	63	58	57	62	66	71	68	61
-1000	55	51	51	56	61	63	57	49
+1000	50	49	43	44	41	40	42	38
+2000	66	62	58	56	56	60	55	62

Face Area Correction Factors

Area	0.5	1	2	4	8	16	32	64	128	256
PWL (dB)	-8	-6	-3	0	+3	+6	+9	+12	+15	+18

Submittal Data Request


Models: RBB-LP, MP and HP • Rectangular Broad Band

Specifications:

Outer casing is constructed of 22 gauge galvanized steel. All external seams are lockformed and filled with a suitable joint compound and air tight up to 10.0" water gauge pressure differential. Stiffners prevent audible vibration during normal operation of air systems.

Interior partitions are minimum 22 gauge galvanized steel perforated to remove no more than 15% of the area. Inorganic fiberglass acoustically absorptive filler material is compressed a minimum of 5% to eliminate voids and prevent setting and is vermin proof, moisture proof and odorless.

Incombustible filler material does not exceed the following fire and smoke hazard classification values when used in accordance with NFPA 90A and UL 181.

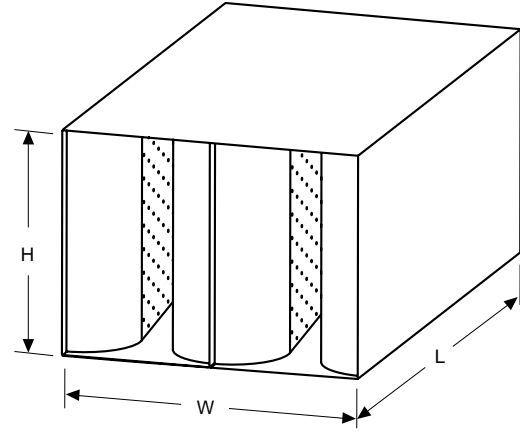

TAG	QTY	W	H	L	REMARKS

Options:

- High temperature sealant 1.5" (38) flange one or both ends
- Field or factory assembled multiple modules 18 gauge (1.31) outer casing construction
- TDF Flange one or both ends



Air Distribution Products:

- Flowline
- Grilles and Registers
- Ceiling Diffusers
- Linear Diffusers
- Plenum Slot Diffusers
- Fire Rated Assemblies
- Hospital/Cleanroom Diffusers



Air Control Products:

- Louvers
- Control & Backdraft Dampers
- Curtain Fire Dampers
- Multi-Blade Fire Dampers
- Smoke Dampers
- Combination Fire/Smoke Dampers
- Ceiling Dampers
- Access Doors



Terminal Units:

- Single Duct
- Dual Duct
- Fan Powered
- Bypass
- Retrofit



Green Building Products

- Underfloor Air Distribution Systems
- Displacement Ventilation



Fan Coil Units

- Vertical Hi-Rise & Closet
- Horizontal Fan Coil Units
- Vertical Sill Fan Coil Units

WSILCB

Complete Air Control and Distribution Solutions

For the most up to date catalog information go to

nailor.com

