




**QUARTER ROUND 90° DISPLACEMENT DIFFUSER
FLOOR STANDING • CORNER
STEEL PERFORATED FACE
MODEL: DFR90**

Model DFR90 • 90° Radial Discharge Air Pattern

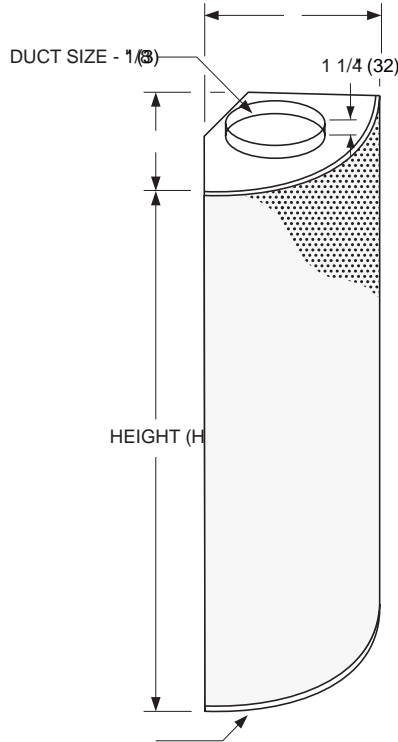

Dimensional Data:

Unit Size (Dia. x H)	R	Duct Size
18 x 24 (457 x 610) 18 x 36 (457 x 914)	9 (229)	4 (102)
18 x 48 (457 x 1219) 18 x 60 (457 x 1524)	9 (229)	4 (102), 6 (152)
24 x 24 (610 x 610) 24 x 36 (610 x 914) 24 x 48 (610 x 1219) 24 x 60 (610 x 1524)	12 (305)	6 (152), 8 (203)
30 x 24 (762 x 610) 30 x 36 (762 x 914) 30 x 48 (762 x 1219) 30 x 60 (762 x 1524)	15 (381)	8 (203)
36 x 24 (914 x 610) 36 x 36 (914 x 914) 36 x 48 (914 x 1219) 36 x 60 (914 x 1524)	18 (457)	10 (254), 12 (305)
42 x 24 (1067 x 610) 42 x 36 (1067 x 914) 42 x 48 (1067 x 1219) 42 x 60 (1067 x 1524)	21 (533)	12 (305)
48 x 24 (1219 x 610) 48 x 36 (1219 x 914) 48 x 48 (1219 x 1219) 48 x 60 (1219 x 1524)	24 (610)	14 (356)

R Radius = Nom. Diameter/2

DESCRIPTION:

Construction: Heavy gauge corrosion-resistant coated steel. Standard 18 ga. (1.3) perforated face has 3/32" (2) dia. holes on 3/16" (5) staggered centers, providing 23% free area.

An equalization baffle is provided behind the diffuser face to ensure an even distribution of low velocity supply air.

Floor mounted displacement diffusers are especially designed to supply air at a very low velocity to minimize the potential for drafts and enhance occupant comfort.

Standard finish is AW Appliance White.

OPTIONS:

1. Construction:
 - %o16GP Heavy Duty 16 ga. (1.6) Perforated Face
2. Inlet Type:
 - %oRND Round
 - %oFC Field Cut
3. Inlet Location:
 - %oT Top
 - %oB Bottom
 - %oR Rear

4. Finish:
 - %oAW Appliance White (default)
 - %oAL Aluminum
 - %oBK Black
 - %oBW British White
 - %oSP Special _____
5. Diffuser Base:
 - %oDB02 2" (51) High %oDB05 5" (127) High
 - %oDB03 3" (76) High %oDB06 6" (152) High
 - %oDB04 4" (102) High
6. Duct Cover:
 - %oDCP Perforated Panels
 - %oDCS Solid Panels
7. Volume Control:
 - %oBD Balancing Damper
 - %oFMSD Flow Measuring Station with balancing damper (Round inlet sizes only). See separate submittal.
8. Protective Film:
 - %oPFC Protective Film Cover on Face and Inlet

SCHEDULE TYPE:		Dimensions are in inches (mm).			
PROJECT:					
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.	
CONTRACTOR:	2 - 25 - 20	DFR	1 - 6 - 20	DFR90	