




PATTERN CEILING DIFFUSERS
100% ALUMINUM • SQUARE NECK
SUITABLE FOR MRI
MODEL: 6200-MRI TYPE L


☐ **TYPE L LAY-IN T-BAR**

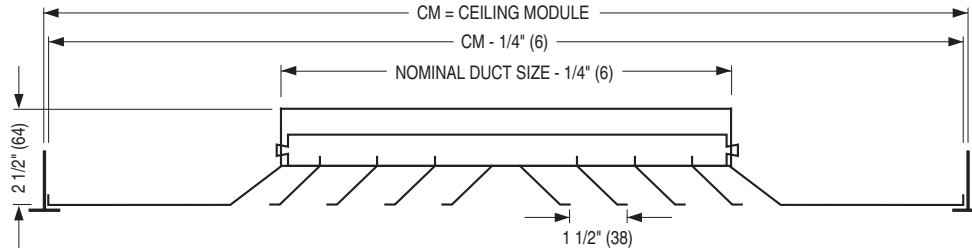

If the ceiling module is not 3" (76) or 6" (152) larger than the neck size of the diffuser in both dimensions, an aluminum module sized extended panel will be added.
Minimum duct size: 6 x 6 (152 x 152).
Maximum duct size: see table.
Available in 3" (76) increments only.

Imperial Modules				Metric Modules	
Imperial Units (in.)		Metric Units (mm)		Metric Units (mm)	
CM	Maximum Duct Size	CM	Maximum Duct Size	CM	Maximum Duct Size
12 x 12	9 x 9	305 x 305	229 x 229	300 x 300	152 x 152
20 x 20	15 x 15	508 x 508	381 x 381	500 x 500	381 x 381
24 x 12	21 x 9	610 x 305	533 x 229	600 x 300	457 x 152
24 x 24	21 x 21	610 x 610	533 x 533	600 x 600	457 x 457
48 x 24	45 x 21	1219 x 610	1143 x 533	1200 x 600	1067 x 457

CORE STYLE SELECTION

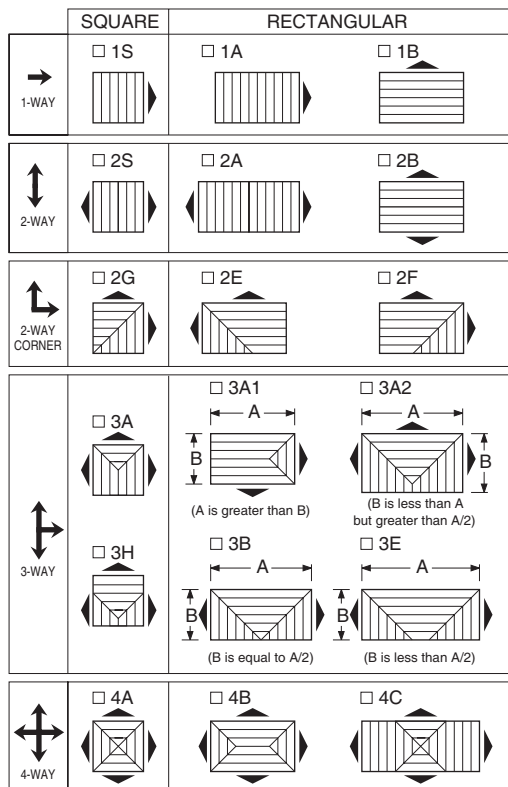

Patterns are shown in plan view (looking down into inlet).

DESCRIPTION:

1. Material: 100% Aluminum. Extended panel where required. Suitable for MRI.
2. Model 6200-MRI is a high capacity ceiling diffuser available in 1, 2, 3 or 4-way blow patterns to provide a tight horizontal airflow pattern from maximum to minimum airflow. Ideal for VAV applications.
3. Fixed core.
4. Standard finish is AW Appliance White.

OPTIONS:

EXTERNAL INSULATION

☐ EX External Foil-Back Insulation, installed

OPTIONAL FINISH:

☐ SP Special. Specify _____.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

7 - 24 - 26

6200

2 - 8 - 18

6200-MRI